
AERODROME GROUND MOVEMENT CHART - ICAO
PHASE 3 (20260719 TIL 20270622 EST)

APRON ELEV
4 m

TWR	121.1
SMC	121.6
	121.9
ATIS	126.4

PENANG / PENANG INTERNATIONAL AIRPORT

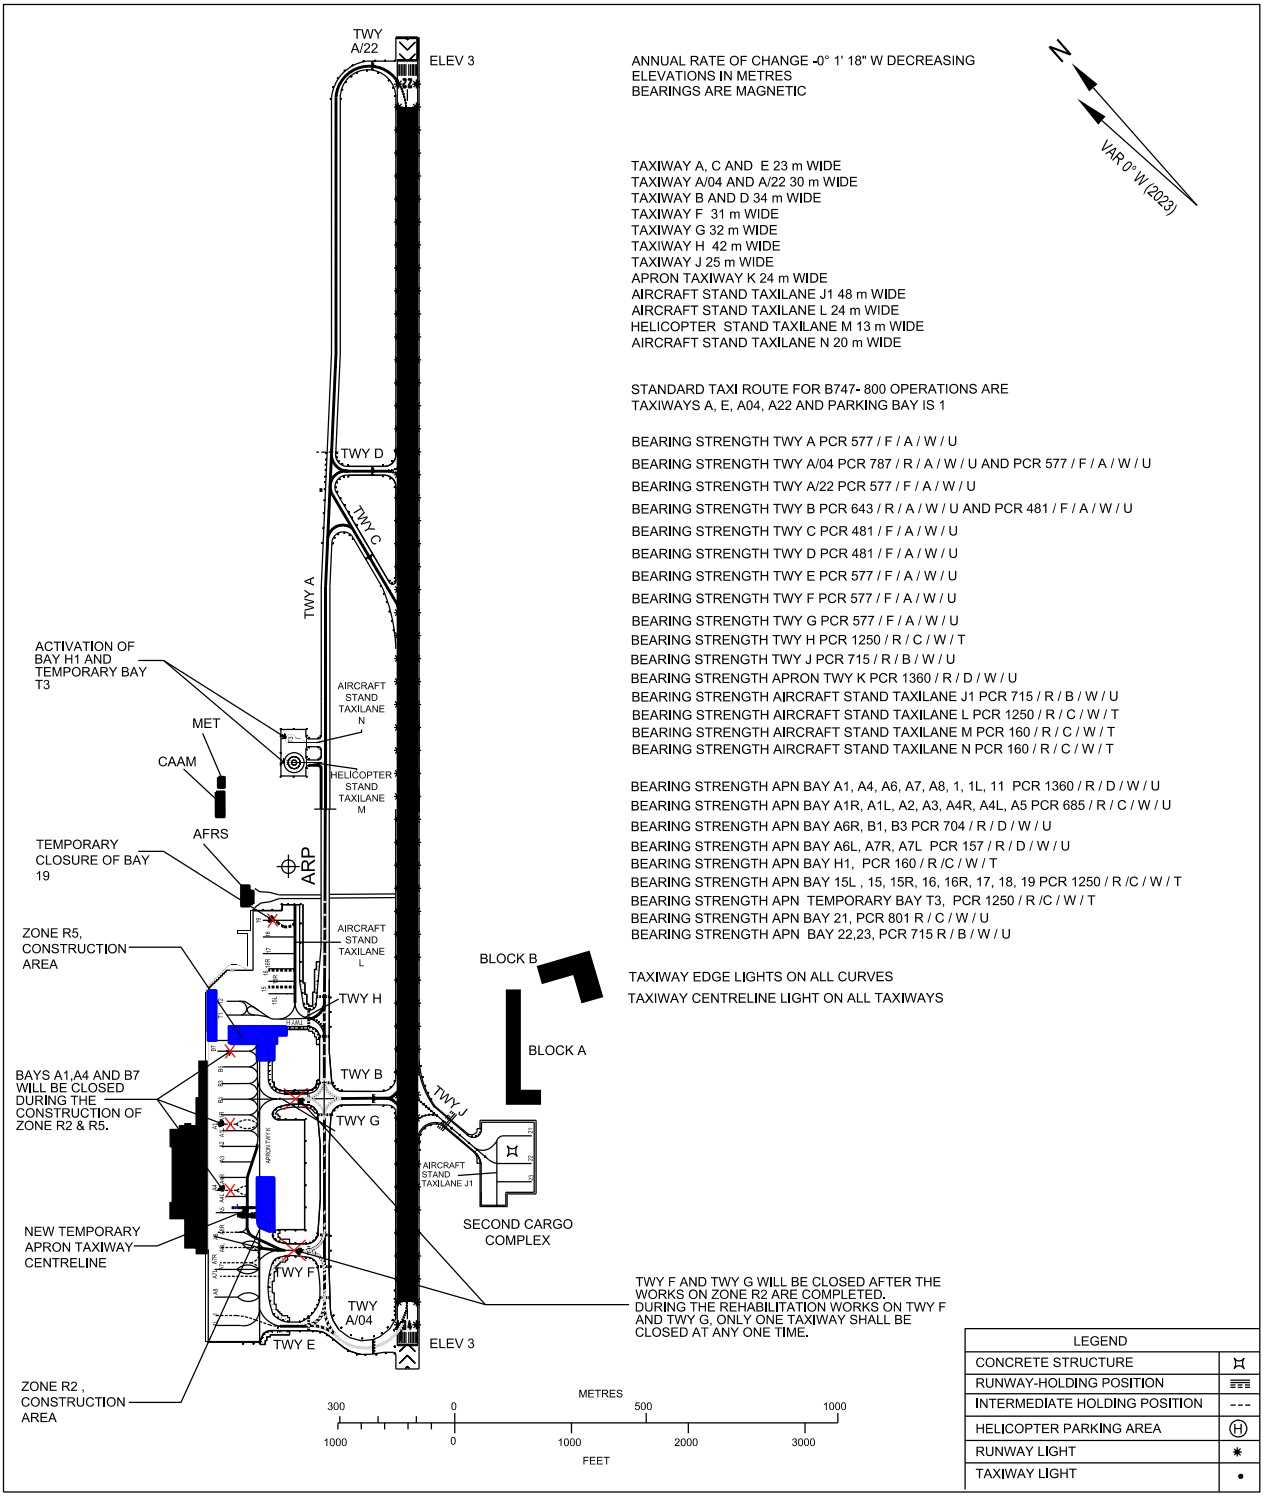

ANNUAL RATE OF CHANGE -0° 1' 18" W DECREASING
ELEVATIONS IN METRES
BEARINGS ARE MAGNETIC

N
VAR 0° W (2023)

TAXIWAY A, C AND E 23 m WIDE
TAXIWAY A/04 AND A/22 30 m WIDE
TAXIWAY B AND D 34 m WIDE
TAXIWAY F 31 m WIDE
TAXIWAY G 32 m WIDE
TAXIWAY H 42 m WIDE
TAXIWAY J 25 m WIDE
APRON TAXIWAY K 24 m WIDE
AIRCRAFT STAND TAXILANE J1 48 m WIDE
AIRCRAFT STAND TAXILANE L 24 m WIDE
HELICOPTER STAND TAXILANE M 13 m WIDE
AIRCRAFT STAND TAXILANE N 20 m WIDE

STANDARD TAXI ROUTE FOR B747- 800 OPERATIONS ARE
TAXIWAYS A, E, A04, A22 AND PARKING BAY IS 1

BEARING STRENGTH TWY A PCR 577 / F / A / W / U
BEARING STRENGTH TWY A/04 PCR 787 / R / A / W / U AND PCR 577 / F / A / W / U
BEARING STRENGTH TWY A/22 PCR 577 / F / A / W / U
BEARING STRENGTH TWY B PCR 643 / R / A / W / U AND PCR 481 / F / A / W / U
BEARING STRENGTH TWY C PCR 481 / F / A / W / U
BEARING STRENGTH TWY D PCR 481 / F / A / W / U
BEARING STRENGTH TWY E PCR 577 / F / A / W / U
BEARING STRENGTH TWY F PCR 577 / F / A / W / U
BEARING STRENGTH TWY G PCR 577 / F / A / W / U
BEARING STRENGTH TWY H PCR 1250 / R / C / W / T
BEARING STRENGTH TWY J PCR 715 / R / B / W / U
BEARING STRENGTH APRON TWY K PCR 1360 / R / D / W / U
BEARING STRENGTH AIRCRAFT STAND TAXILANE J1 PCR 715 / R / B / W / U
BEARING STRENGTH AIRCRAFT STAND TAXILANE L PCR 1250 / R / C / W / T
BEARING STRENGTH AIRCRAFT STAND TAXILANE M PCR 160 / R / C / W / T
BEARING STRENGTH AIRCRAFT STAND TAXILANE N PCR 160 / R / C / W / T

BEARING STRENGTH APN BAY A1, A4, A6, A7, A8, 1, 1L, 11 PCR 1360 / R / D / W / U
BEARING STRENGTH APN BAY A1R, A1L, A2, A3, A4R, A4L, A5 PCR 685 / R / C / W / U
BEARING STRENGTH APN BAY A6R, B1, B3 PCR 704 / R / D / W / U
BEARING STRENGTH APN BAY A6L, A7R, A7L PCR 157 / R / D / W / U
BEARING STRENGTH APN BAY H1, PCR 160 / R /C / W / T
BEARING STRENGTH APN BAY 15L , 15, 15R, 16, 16R, 17, 18, 19 PCR 1250 / R /C / W / T
BEARING STRENGTH APN TEMPORARY BAY T3, PCR 1250 / R /C / W / T
BEARING STRENGTH APN BAY 21, PCR 801 R / C / W / U
BEARING STRENGTH APN BAY 22,23, PCR 715 R / B / W / U

TAXIWAY EDGE LIGHTS ON ALL CURVES
TAXIWAY CENTRELINE LIGHT ON ALL TAXIWAYS

TWY F AND TWY G WILL BE CLOSED AFTER THE WORKS ON ZONE R2 ARE COMPLETED. DURING THE REHABILITATION WORKS ON TWY F AND TWY G, ONLY ONE TAXIWAY SHALL BE CLOSED AT ANY ONE TIME.

LEGEND	
CONCRETE STRUCTURE	⌗
RUNWAY-HOLDING POSITION	≡≡
INTERMEDIATE HOLDING POSITION	---
HELICOPTER PARKING AREA	Ⓗ
RUNWAY LIGHT	✱
TAXIWAY LIGHT	•