


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 56FT
HEIGHTS RELATED TO
THR RWY24 ELEV - 36FT

SMC 121.90
TWR 122.50
APP 123.55
ATIS 126.25

TAWAU/TAWAU (WBKW)
RWY 24

ILS OR LOC

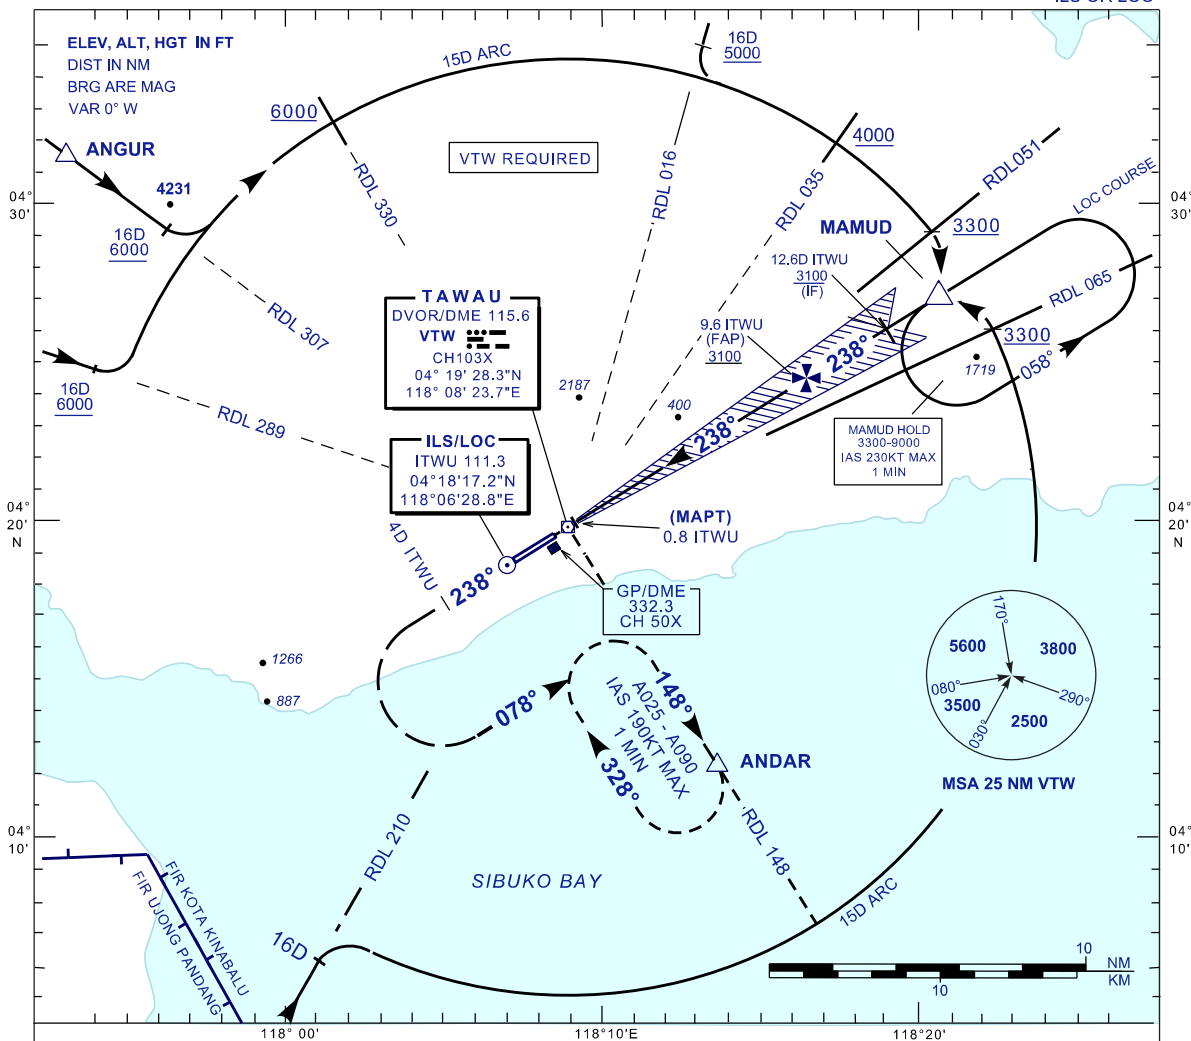


MISSED APPROACH

CLIMB ON 238° AT 4D ITWU
TURN LEFT TRACK 078° TO INTERCEPT
RDL 148 HOLD OVER ANDAR
3300 FT OR AS DIRECTED
BY ATC

THR ELEV 36

DIST FM ITWU

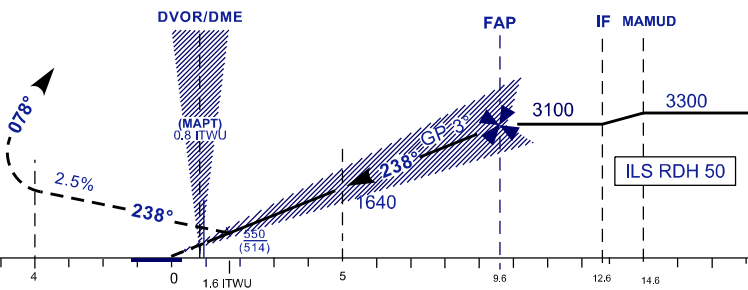

OCA(H)		A	B	C	D	CIRCLING		A	B	C	D
STRAIGHT-IN APPROACH	CAT 1	260(224)	270(234)	290(254)	300(264)			800(744)	*1100(1044)		
	GP INOP	550(514)						1.0	1.5	2.0	2.5

DIST. FM ITWU	9.6	9	8	7	6	5	4	3	2	1.6
ALTITUDE	3100	2910	2590	2270	1960	1640	1320	1000	680	550

*CAUTION : CIRCLING PROHIBITED IN SECTOR 300° - 045° FOR CAT D AIRCRAFT

CHANGES : CHANGE AERODROME ELEVATION VALUE