

**AERODROME/HELIPORT  
CHART - ICAO**

04° 18' 39" N  
118° 06' 59" E  
ELEV 17 M


TWR 122.50  
SMC 121.9  
APP 123.55  
ATIS 126.25

**TAWAU/  
TAWAU AIRPORT**

RWY	DIRECTION	THR	BEARING STRENGTH
06	58°	04° 18' 25.28" N 118° 06' 41.96" E	PCN 69/F/C/W/T ASPHALT
24	238°	04° 19' 11.11" N 118° 07' 56.07" E	




ANNUAL RATE OF CHANGE -0° 5' 7" W  
ELEVATIONS AND DIMENSION  
IN METRES  
BEARING ARE MAGNETIC

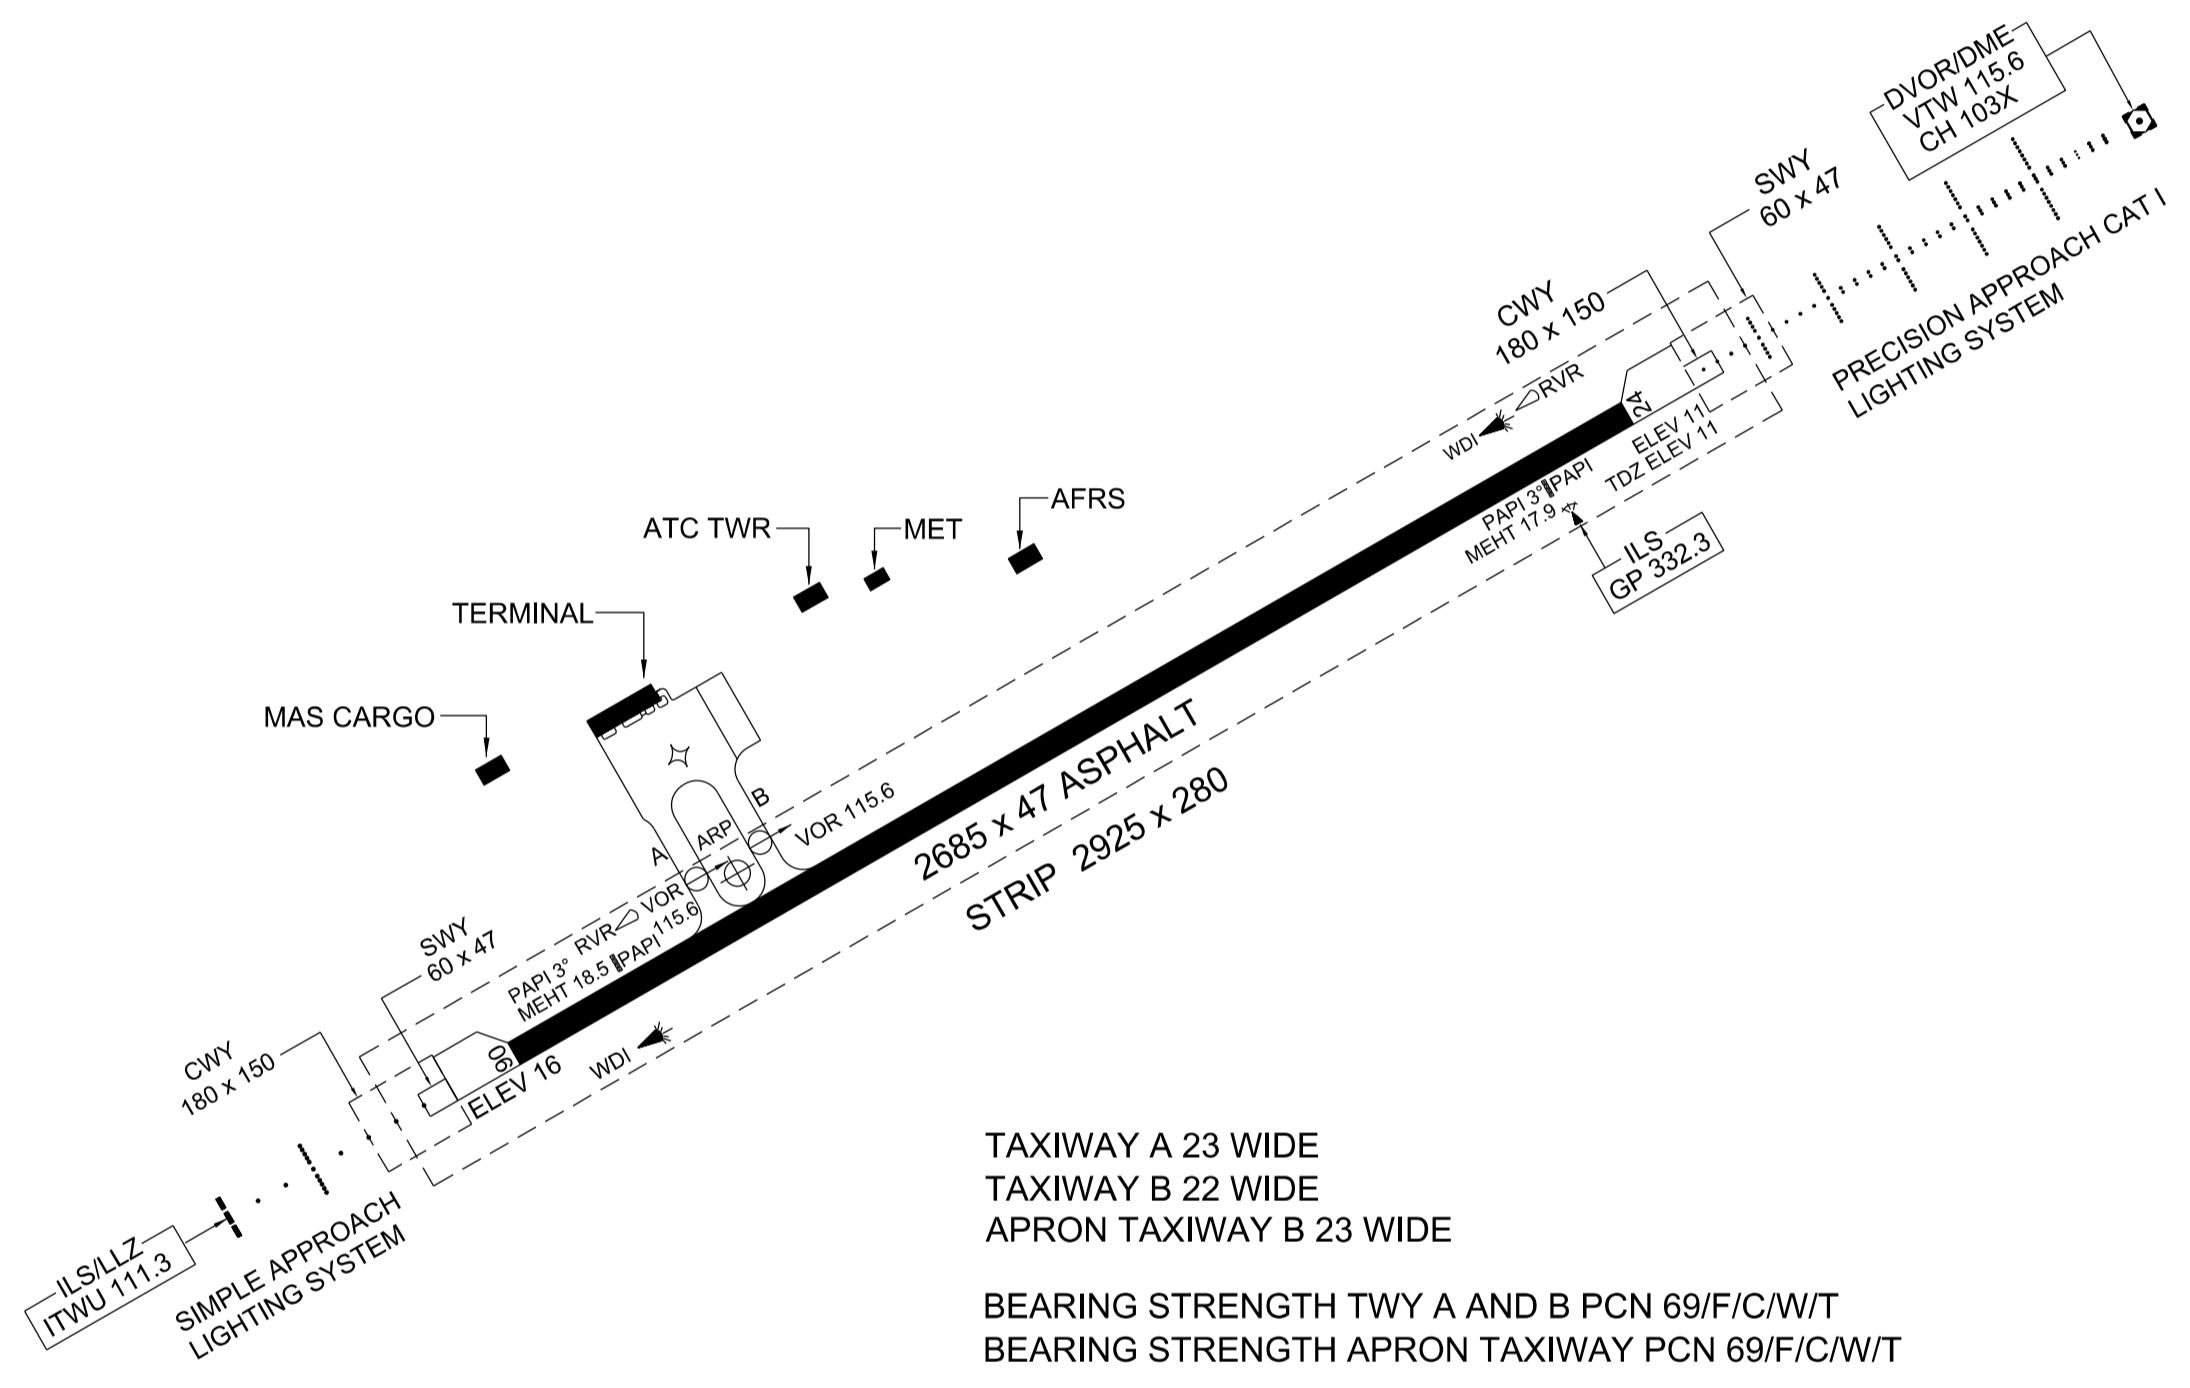

TAXIWAY A 23 WIDE  
TAXIWAY B 22 WIDE  
APRON TAXIWAY B 23 WIDE

BEARING STRENGTH TWY A AND B PCN 69/F/C/W/T  
BEARING STRENGTH APRON TAXIWAY PCN 69/F/C/W/T

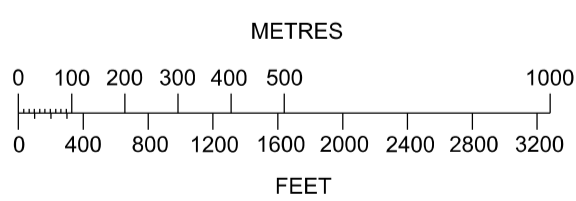

LEGEND	
CONCRETE STRUCTURE	
VOR CHECKPOINT AND FREQUENCY	

- CHANGES:** PATTERN OF APPROACH LIGHT  
INFO ON RUNWAY DIRECTION TO MAGNETIC BEARING  
INFO ON MEHT FOR RWY 06  
INFO ON MAGNETIC VARIATION AND ANNUAL CHANGE  
INFO ON AERODROME ELEVATION  
INFO ON WIDTH OF APRON TAXIWAY  
REMOVE INFORMATION ON HELIPAD  
ADJUST BAR SCALE  
ADD INFO AT LEGEND  
ADD INFO ON CLEARWAY