

AERODROME/HELIPORT CHART - ICAO


04° 18' 39" N
118° 06' 59" E

ELEV 17 M


TWR	122.50
SMC	121.9
APP	123.55
ATIS	126.25

TAWAU/ TAWAU AIRPORT

RWY	DIRECTION	THR	BEARING STRENGTH
06	58°	04° 18' 25.28" N 118° 06' 41.96" E	PCN 69/F/C/W/T ASPHALT
24	238°	04° 19' 11.11" N 118° 07' 56.07" E	




ANNUAL RATE OF CHANGE -0° 5' 7" W DECREASING
ELEVATIONS AND DIMENSION
IN METRES
BEARING ARE MAGNETIC

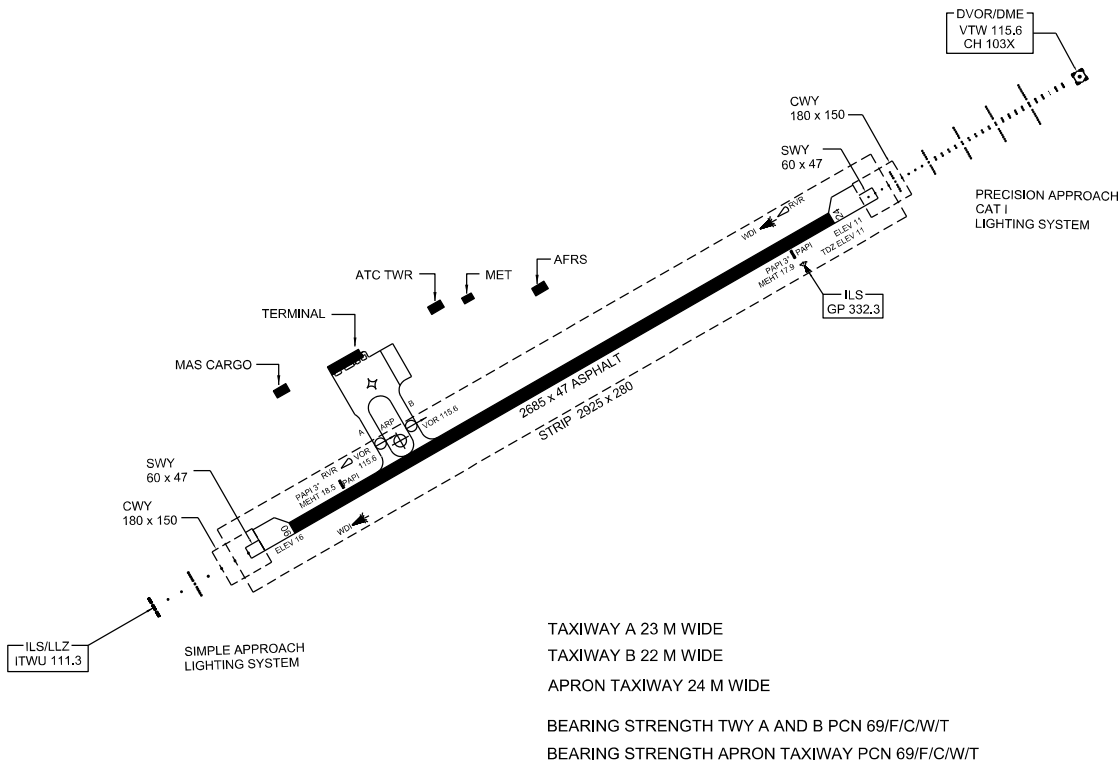

TAXIWAY A 23 M WIDE
TAXIWAY B 22 M WIDE
APRON TAXIWAY 24 M WIDE

BEARING STRENGTH TWY A AND B PCN 69/F/C/W/T
BEARING STRENGTH APRON TAXIWAY PCN 69/F/C/W/T



LEGEND	
CONCRETE STRUCTURE	
VOR CHECKPOINT AND FREQUENCY	

CHANGES: INFO ON WIDTH OF APRON TAXIWAY
ADD SYMBOL 'M' AT WIDTH OF TAXIWAY