

AERODROME CHART - ICAO

**SEPAANG/
KL INTERNATIONAL
AIRPORT**

ELEVATION 21 M
02° 44 ' 36" N
101° 41 ' 53" E


RWY 15/33	RWY 14R/32L	RWY 14L/32R	APRON WEST	APRON EAST	ACD
TWR 119.800	TWR 118.500	TWR 118.800	121.725	122.150	126.0
GND 118.050	GND 121.800	GND 121.650	122.550	122.850	128.15
	GND 122.525		130.750	122.275	
				123.250	

ELEVATIONS AND DIMENSIONS IN METERS
BEARINGS ARE MAGNETIC




RWY	DIRECTION	THRESHOLD
15	146°	02° 44' 17.57" N 101° 40' 38.97" E
33	326°	02° 42' 30.67" N 101° 41' 50.65" E
14R	146°	02° 44' 35.84" N 101° 41' 52.63" E
32L	326°	02° 42' 47.86" N 101° 43' 05.03" E
14L	146°	02° 46' 42.52" N 101° 42' 06.67" E
32R	326°	02° 44' 54.03" N 101° 43' 19.41" E

BEARING STRENGTH			
RWY	TWY	APRON	
ALL RWY	RWY 14L/32R AND RWY 14R/32L ASPHALT	RWY 14L/32R AND RWY 14R/32L	KLIA 2
CONC PCN90/R/C/W/T FLEX PCN100/F/C/W/T	PCN100/R/C/W/T	CONC PCN90/R/C/W/T PCN 100 RWY / TWY	WI APRON QUADRANT WTN,WTE, WTS, WTW-1, WSN & WSW ASPHALT PCN 97/F/D/X/T
	WI RWY 14R/32L & RWY 15/33 U1,U2,U3,U4,U8 & U9 ASPHALT PCN 97/F/D/X/T U5,U6 & U7 ASPHALT PCN 114/F/D/X/T		WI APRON QUADRANT WTW-2, WSE & WSS ASPHALT PCN 114/F/D/X/T

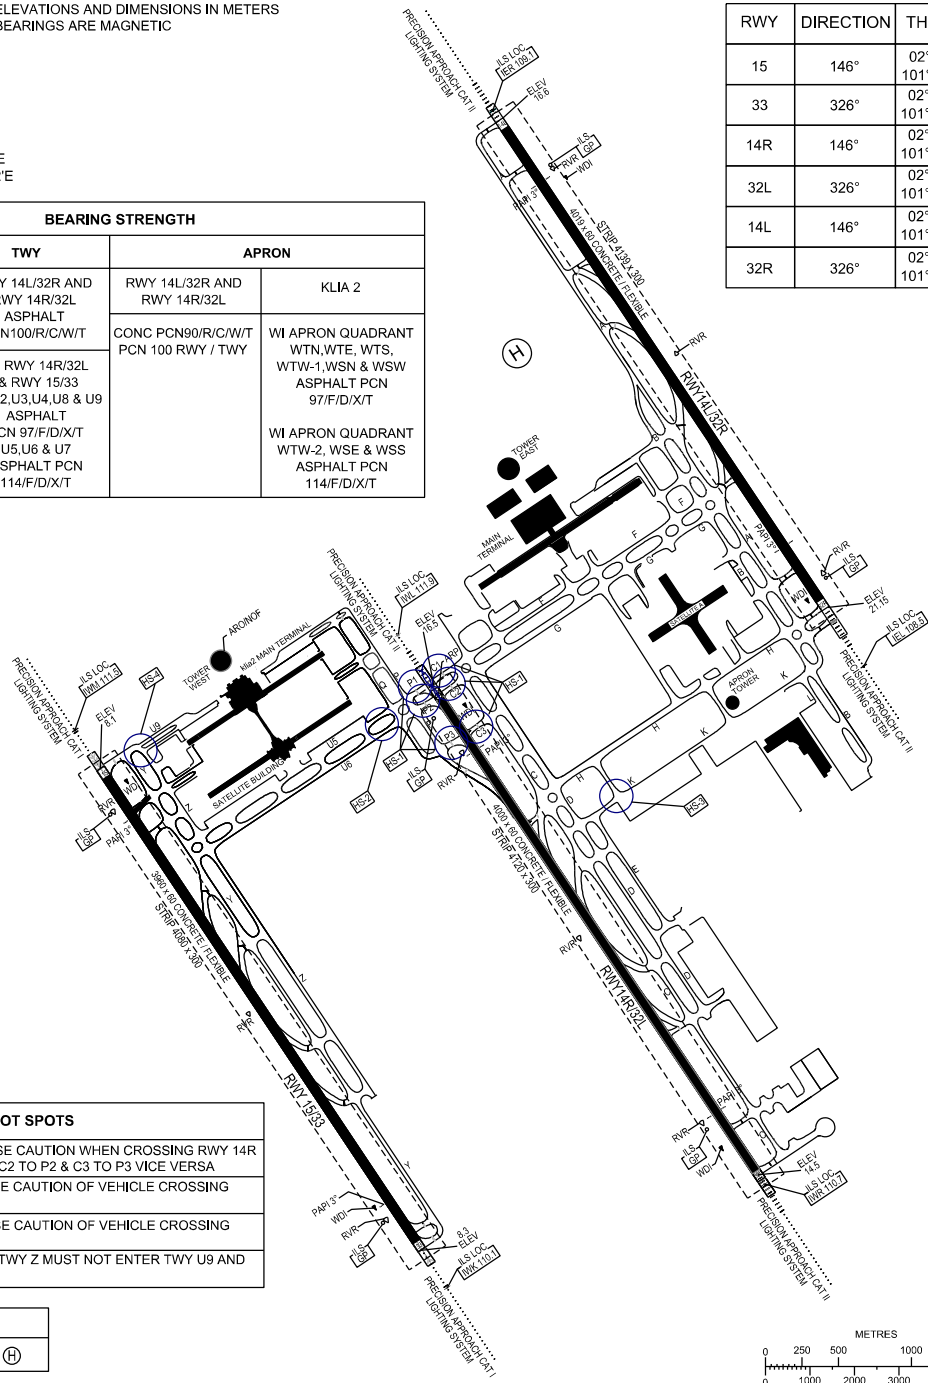

HOT SPOTS	
HS 1	PILOTS TO EXERCISE CAUTION WHEN CROSSING RWY 14R VIA TWY C1 TO P1, C2 TO P2 & C3 TO P3 VICE VERSA
HS 2	PILOTS TO EXERCISE CAUTION OF VEHICLE CROSSING TWY U5 & U6
HS 3	PILOTS TO EXERCISE CAUTION OF VEHICLE CROSSING TWY K
HS 4	AIRCRAFT EXITING TWY Z MUST NOT ENTER TWY U9 AND VICE VERSA

LEGEND	
HELIPORT	(H)



CHANGES : ADD AIRWAYS CLEARANCE DELIVERY (ACD) FREQUENCY.