

**AERODROME/HELIPORT
CHART- ICAO**

02° 52' 55" N
112° 02' 36" E

ELEV 6 M

TWR	118,300 (P)
	118,425 (S)
EMERG	121.50
SMC	118.075
ATIS	126.200


MUKAH/MUKAH AIRPORT

RWY	DIRECTION	THR	BEARING STRENGTH
15	146°	02° 53' 15.48" N 112° 02' 22.74" E	PCN 19/F/C/X/T ASPHALT (FLEXIBLE)
33	326°	02° 52' 35.08" N 112° 02' 50.02" E	




ANNUAL RATE OF CHANGE - 0.06'
ELEVATIONS AND DIMENSIONS
IN METRES, BEARINGS ARE MAGNETIC

DVOR/DME
VMH 115.3

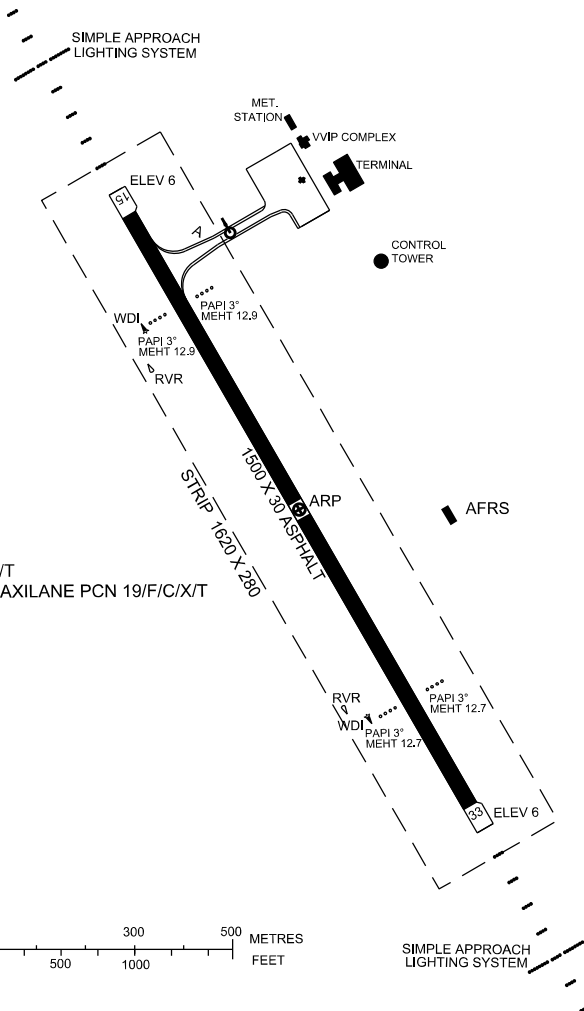

TAXIWAY A 15M WIDE
AIRCRAFT STAND TAXILANE 15M WIDE

BEARING STRENGTH TWY A PCN 19/F/C/X/T
BEARING STRENGTH AIRCRAFT STAND TAXILANE PCN 19/F/C/X/T



LEGEND	
VOR CHECK POINT	VMH 115.3
CONCRETE STRUCTURE	

CHANGES: NEW CHART AND INFORMATION UPDATED