


TWR	122.05
	121.5
SMC	121.9
ATIS	128.2
APP	123.2

RWY	DIRECTION	THR	BEARING STRENGTH
08	080°	05° 53' 57.15" N 118° 02' 48.95" E	62 / F / C / W / T - 367 M ASPHALT (FLEXIBLE) 55 / F / B / W / T - 1983 M ASPHALT (FLEXIBLE) 88 / R / C / W / T - 150 M CONCRETE (RIGID)
26	260°	05° 54' 10.15" N 118° 04' 09.00" E	88 / R / C / W / T - 150 M CONCRETE (RIGID) 55 / F / B / W / T - 1983 M ASPHALT (FLEXIBLE) 62 / F / C / W / T - 367 M ASPHALT (FLEXIBLE)




ANNUAL RATE OF CHANGE 5" W
ELEVATIONS AND DIMENSIONS IN
METRES
BEARINGS ARE MAGNETIC

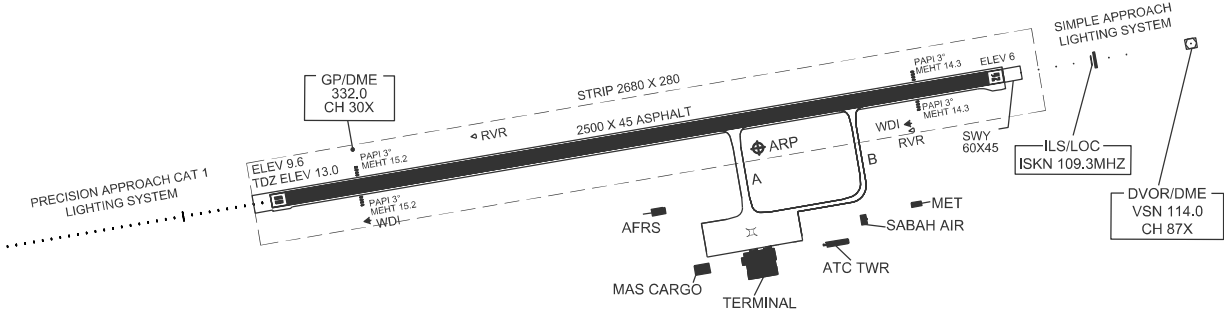

TAXIWAY A 30M WIDE
TAXIWAY B 15M WIDE
APRON TAXIWAY 15M WIDE

BEARING STRENGTH TWY A PCN 78/ F / B / W / T
BEARING STRENGTH TWY B PCN 62/ F / C / W / T
BEARING STRENGTH APRON TAXIWAY PCN 62/ F / C / W / T

TAXIWAY EDGE LIGHTS ON TWY A & TWY B
TAXIWAY CENTRE LINE LIGHTS ON CURVE AND EXIT TWY A & TWY B



LEGEND	
CONCRETE STRUCTURE	