STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 11,000 FT

APP	119.1
TWR	118.3
GND	121.6
ATIS	127.4

KOTA KINABALU/KOTA KINABALU (WBKK) RWY 02

DEPARTURES (LEFT TURN)

(RNAV 1)

BANK ANGLE : 15° ACHIEVED

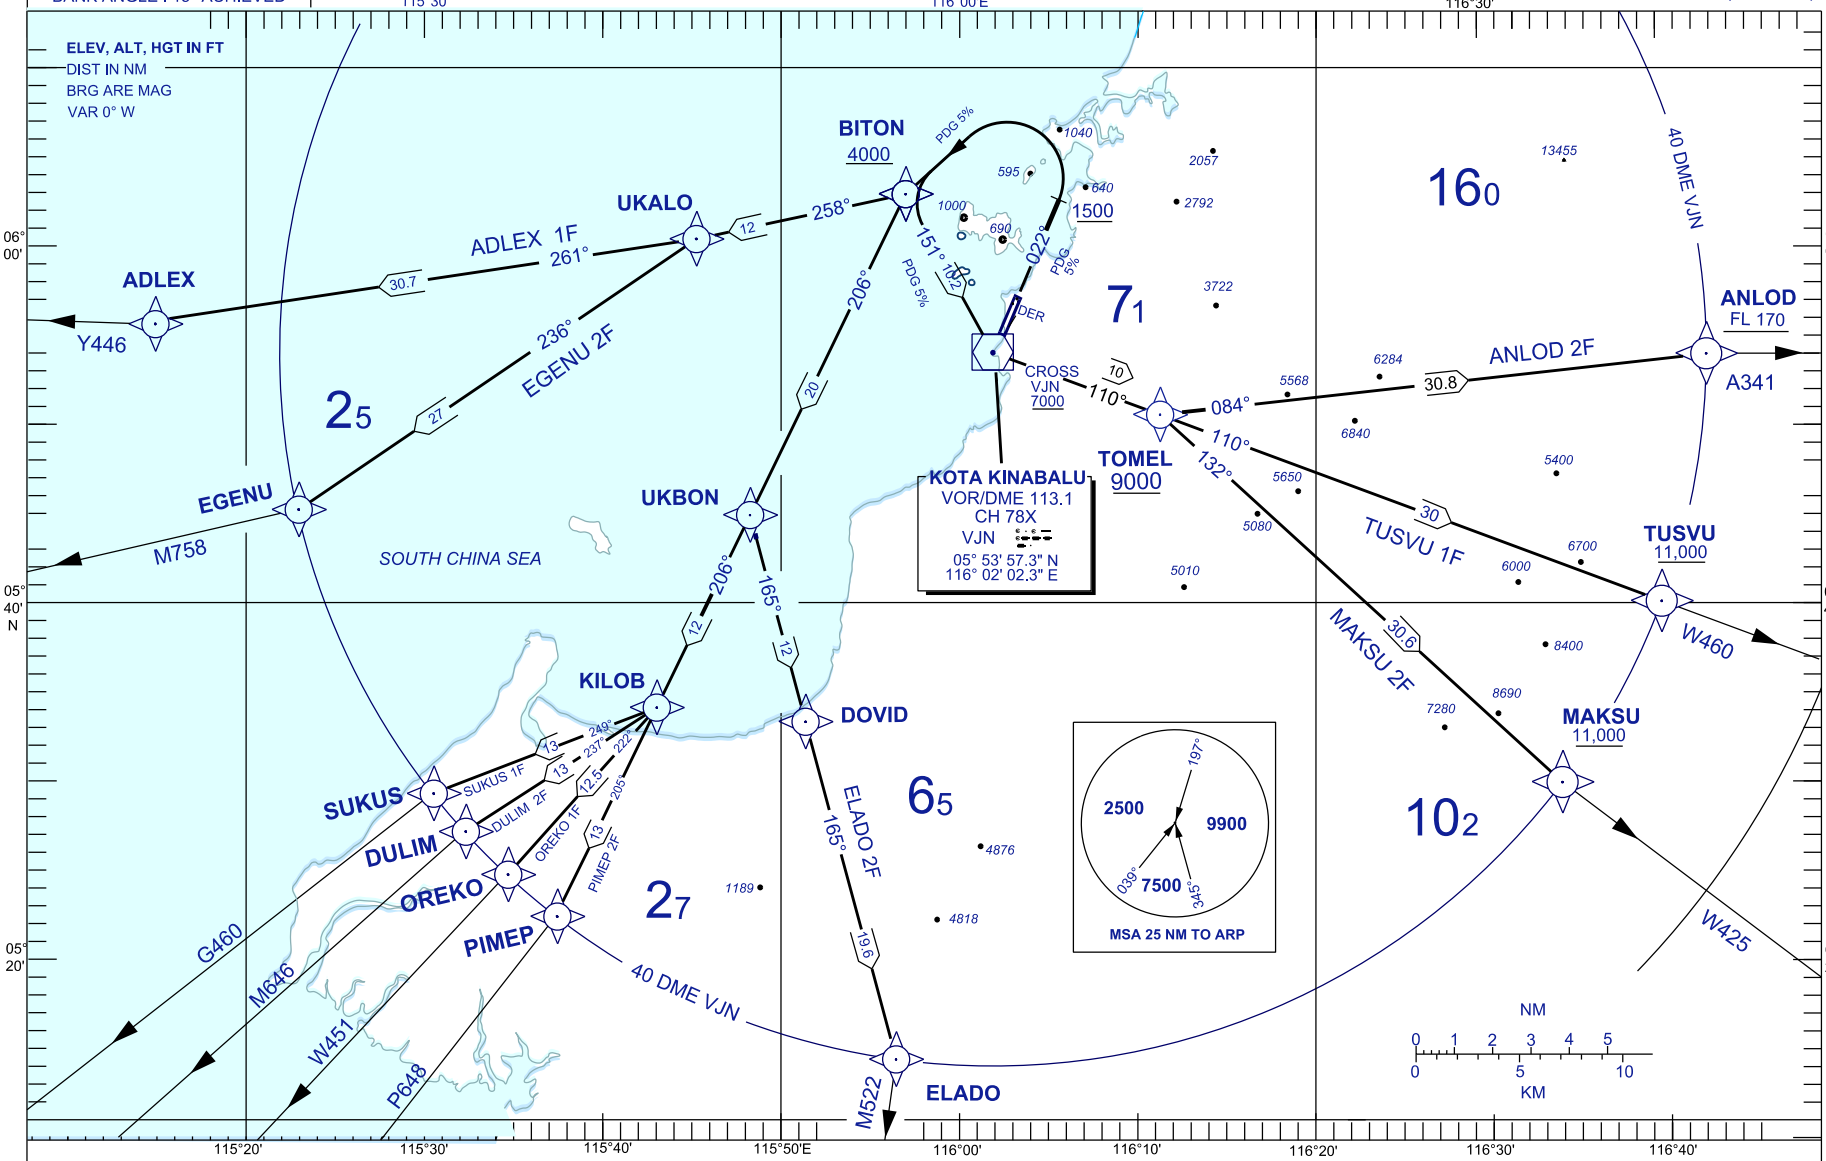

COMMUNICATION FAILURE :

- SQUAWK 7600
- IF UNDER PILOT NAVIGATION, MAINTAIN LAST ASSIGNED LEVEL FOR 3 MINUTES, IF NO ONWARD CLEARANCE IS RECEIVED. SUBSEQUENTLY CLIMB TO COMPLY WITH SID.
  IF BELOW MSA, CLIMB TO MSA, THEN TRACK TO INTERCEPT CLEARED OR PREVIOUSLY ASSIGNED SID TO DESTINATION.

NOTE:

UNLESS SPECIFIED BY TOWER, ALL IFR DEPARTURES TO CONTACT KINABALU RADAR 119.1 MHZ AFTER AIRBORNE.

LEGEND

9500 = AT OR ABOVE 9500FT

9500 = RECOMMENDED ALTITUDE 9500FT

8 7 = AREA MNM ALT 8700FT

SPEED (IAS) KT	120	140	160	180	200	230	265
5% ROC (FT/MIN)	608	709	811	911	1012	1165	1342
6% ROC (FT/MIN)	729	849	973	1094	1215	1397	1610
7% ROC (FT/MIN	851	991	1136	1276	1418	1630	1878

CHANGES : UPDATING THE CHART FORMAT