AERODROME/HELIPORT CHART - ICAO

01° 38' 26" N
103° 40' 13" E

ELEV 41M

SMC	121.80 MHZ
TWR	118.15 MHZ
APP	124.70 MHZ
	121.05 MHZ
ATIS	123.05 MHZ

JOHOR BAHRU SENAI INTERNATONAL AIRPORT

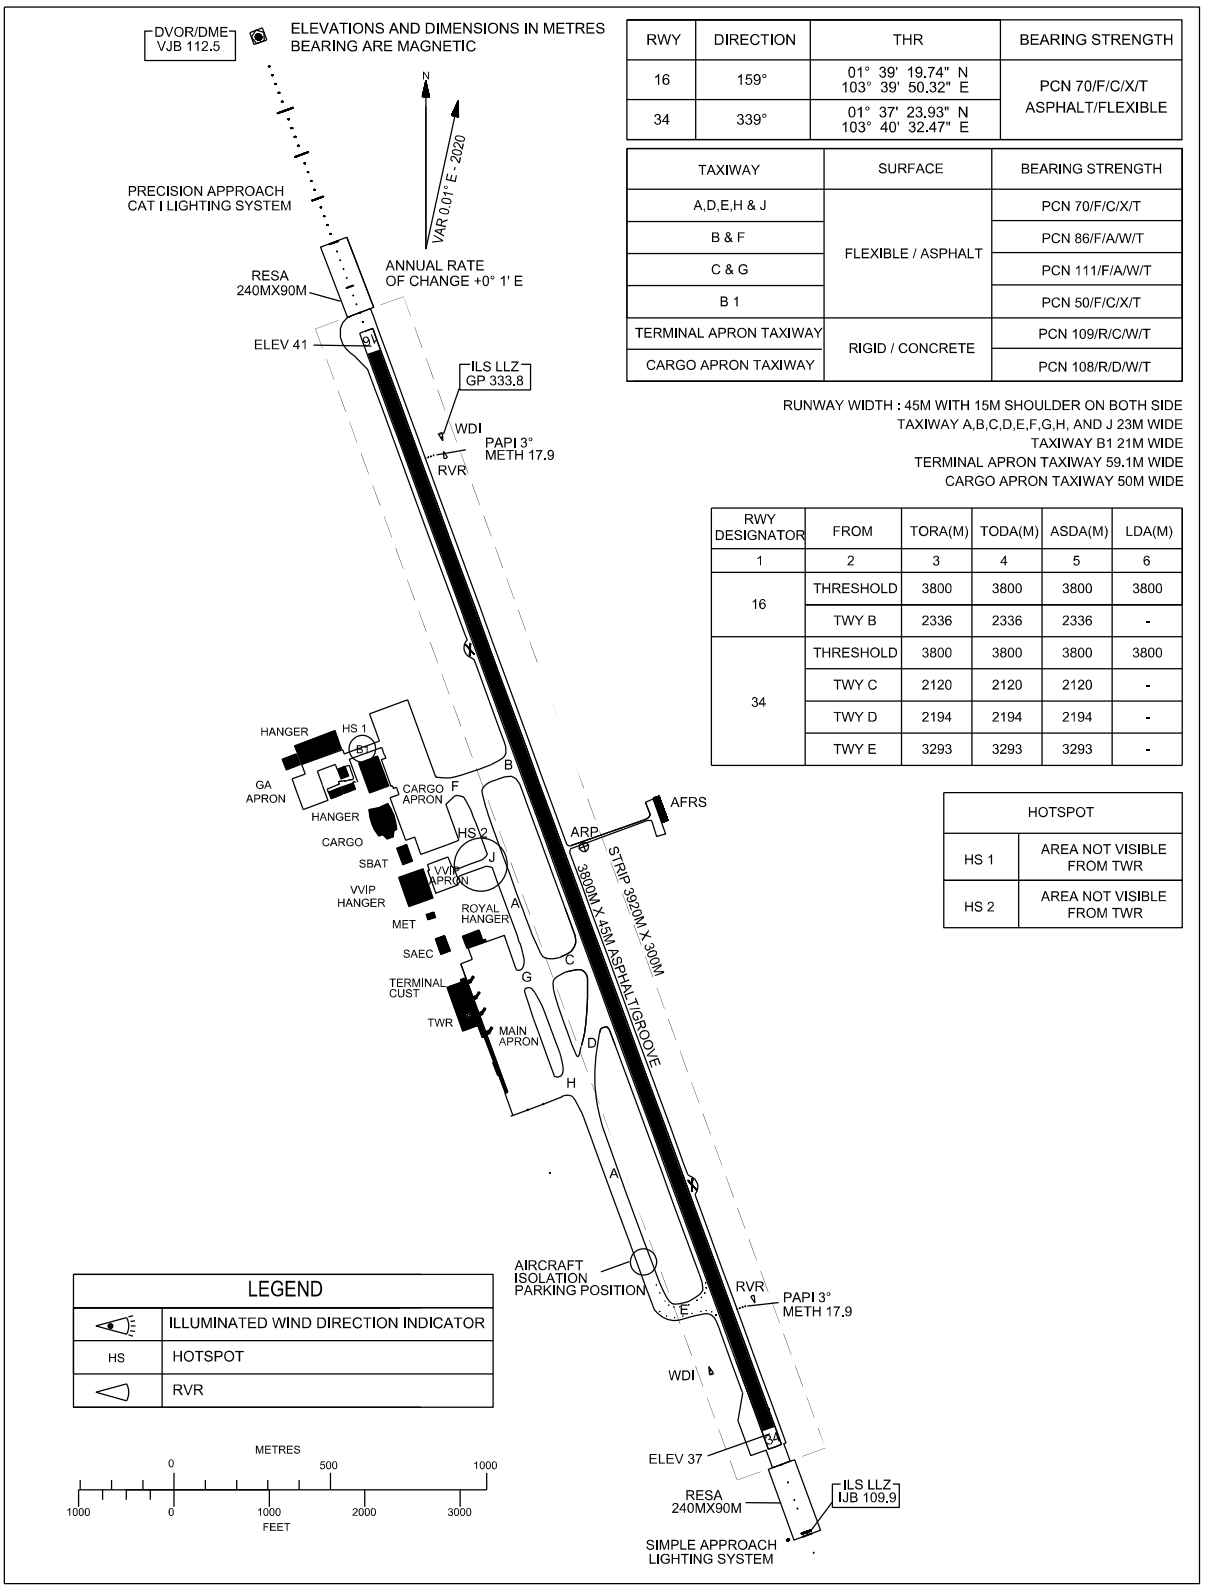

RWY	DIRECTION	THR	BEARING STRENGTH
16	159°	01° 39' 19.74" N 103° 39' 50.32" E	PCN 70/F/C/X/T ASPHALT/FLEXIBLE
34	339°	01° 37' 23.93" N 103° 40' 32.47" E	

TAXIWAY	SURFACE	BEARING STRENGTH
A,D,E,H & J	FLEXIBLE / ASPHALT	PCN 70/F/C/X/T
B & F		PCN 86/F/A/W/T
C & G		PCN 111/F/A/W/T
B 1		PCN 50/F/C/X/T
TERMINAL APRON TAXIWAY	RIGID / CONCRETE	PCN 109/R/C/W/T
CARGO APRON TAXIWAY		PCN 108/R/D/W/T

RUNWAY WIDTH : 45M WITH 15M SHOULDER ON BOTH SIDE
TAXIWAY A,B,C,D,E,F,G,H, AND J 23M WIDE
TAXIWAY B1 21M WIDE
TERMINAL APRON TAXIWAY 59.1M WIDE
CARGO APRON TAXIWAY 50M WIDE

RWY DESIGNATOR	FROM	TORA(M)	TODA(M)	ASDA(M)	LDA(M)
1	2	3	4	5	6
16	THRESHOLD	3800	3800	3800	3800
	TWY B	2336	2336	2336	-
34	THRESHOLD	3800	3800	3800	3800
	TWY C	2120	2120	2120	-
	TWY D	2194	2194	2194	-
	TWY E	3293	3293	3293	-

HOTSPOT	
HS 1	AREA NOT VISIBLE FROM TWR
HS 2	AREA NOT VISIBLE FROM TWR

LEGEND	
	ILLUMINATED WIND DIRECTION INDICATOR
HS	HOTSPOT
	RVR

CHANGES : REPLACEMENT CHART