

**AERODROME/HELIPORT
CHART - ICAO**

05°54'03"N
118°03'41"E
ELEV 13 M


TWR	122.05
SMC	121.5
ATIS	121.9
APP	128.2
APP	123.2

**SANDAKAN/
SANDAKAN AIRPORT**

RWY	DIRECTION	THR	BEARING STRENGTH
08	080°	05° 53' 57.15" N 118° 02' 48.95" E	PCR 574 / F / C / W / U - 367 M ASPHALT (FLEXIBLE)
			PCR 524 / F / B / W / U - 1983 M ASPHALT (FLEXIBLE)
			PCR 685 / R / C / W / U - 150 M CONCRETE (RIGID)
26	260°	05° 54' 10.15" N 118° 04' 09.00" E	PCR 685 / R / C / W / U - 150 M CONCRETE (RIGID)
			PCR 524 / F / B / W / U - 1983 M ASPHALT (FLEXIBLE)
			PCR 574 / F / C / W / U - 367 M ASPHALT (FLEXIBLE)




ANNUAL RATE OF CHANGE -0° 5' 11" W
ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

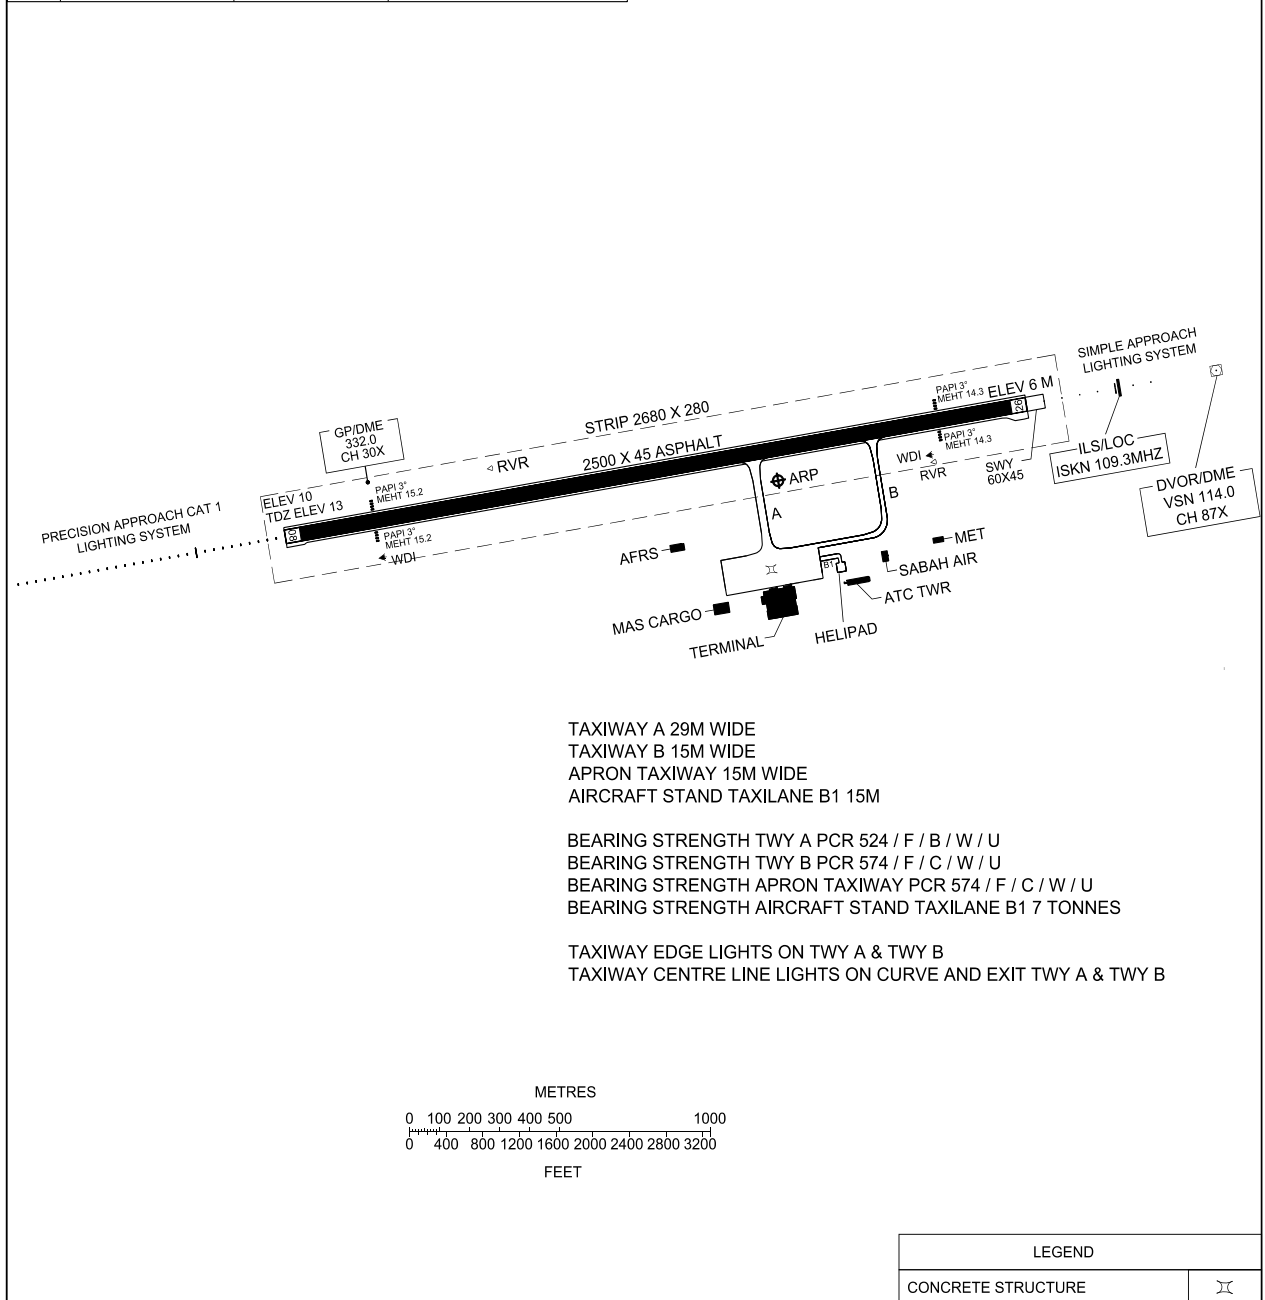

TAXIWAY A 29M WIDE
TAXIWAY B 15M WIDE
APRON TAXIWAY 15M WIDE
AIRCRAFT STAND TAXILANE B1 15M

BEARING STRENGTH TWY A PCR 524 / F / B / W / U
BEARING STRENGTH TWY B PCR 574 / F / C / W / U
BEARING STRENGTH APRON TAXIWAY PCR 574 / F / C / W / U
BEARING STRENGTH AIRCRAFT STAND TAXILANE B1 7 TONNES

TAXIWAY EDGE LIGHTS ON TWY A & TWY B
TAXIWAY CENTRE LINE LIGHTS ON CURVE AND EXIT TWY A & TWY B



LEGEND	
CONCRETE STRUCTURE	☒

CHANGES : TAXIWAY WIDTH FOR TWY A
ADD INFORMATION ON HELIPAD
PAVEMENT BEARING STRENGTH
MAGENETIC VARIATION & ANNUAL RATE
ADD INFORMATION AIRCRAFT STAND TAXILANE B1