

**AERODROME/HELIPORT
CHART - ICAO**

03° 07' 27" N
113° 01' 11" E
ELEV 23 M


TWR/APP	122.30 (P)
	119.25 (S)
SMC	121.5
ATIS	121.8

**BINTULU/
BINTULU AIRPORT**

RWY	DIRECTION	THR	BEARING STRENGTH
17	167°	03° 08' 10.44" N 113° 01' 01.47" E	PCR 564/F/A/W/U ASPHALT (FLEXIBLE)
35	347°	03° 06' 43.16" N 113° 01' 20.61" E	



ANNUAL RATE CHANGE -0° 3' 51" E
ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

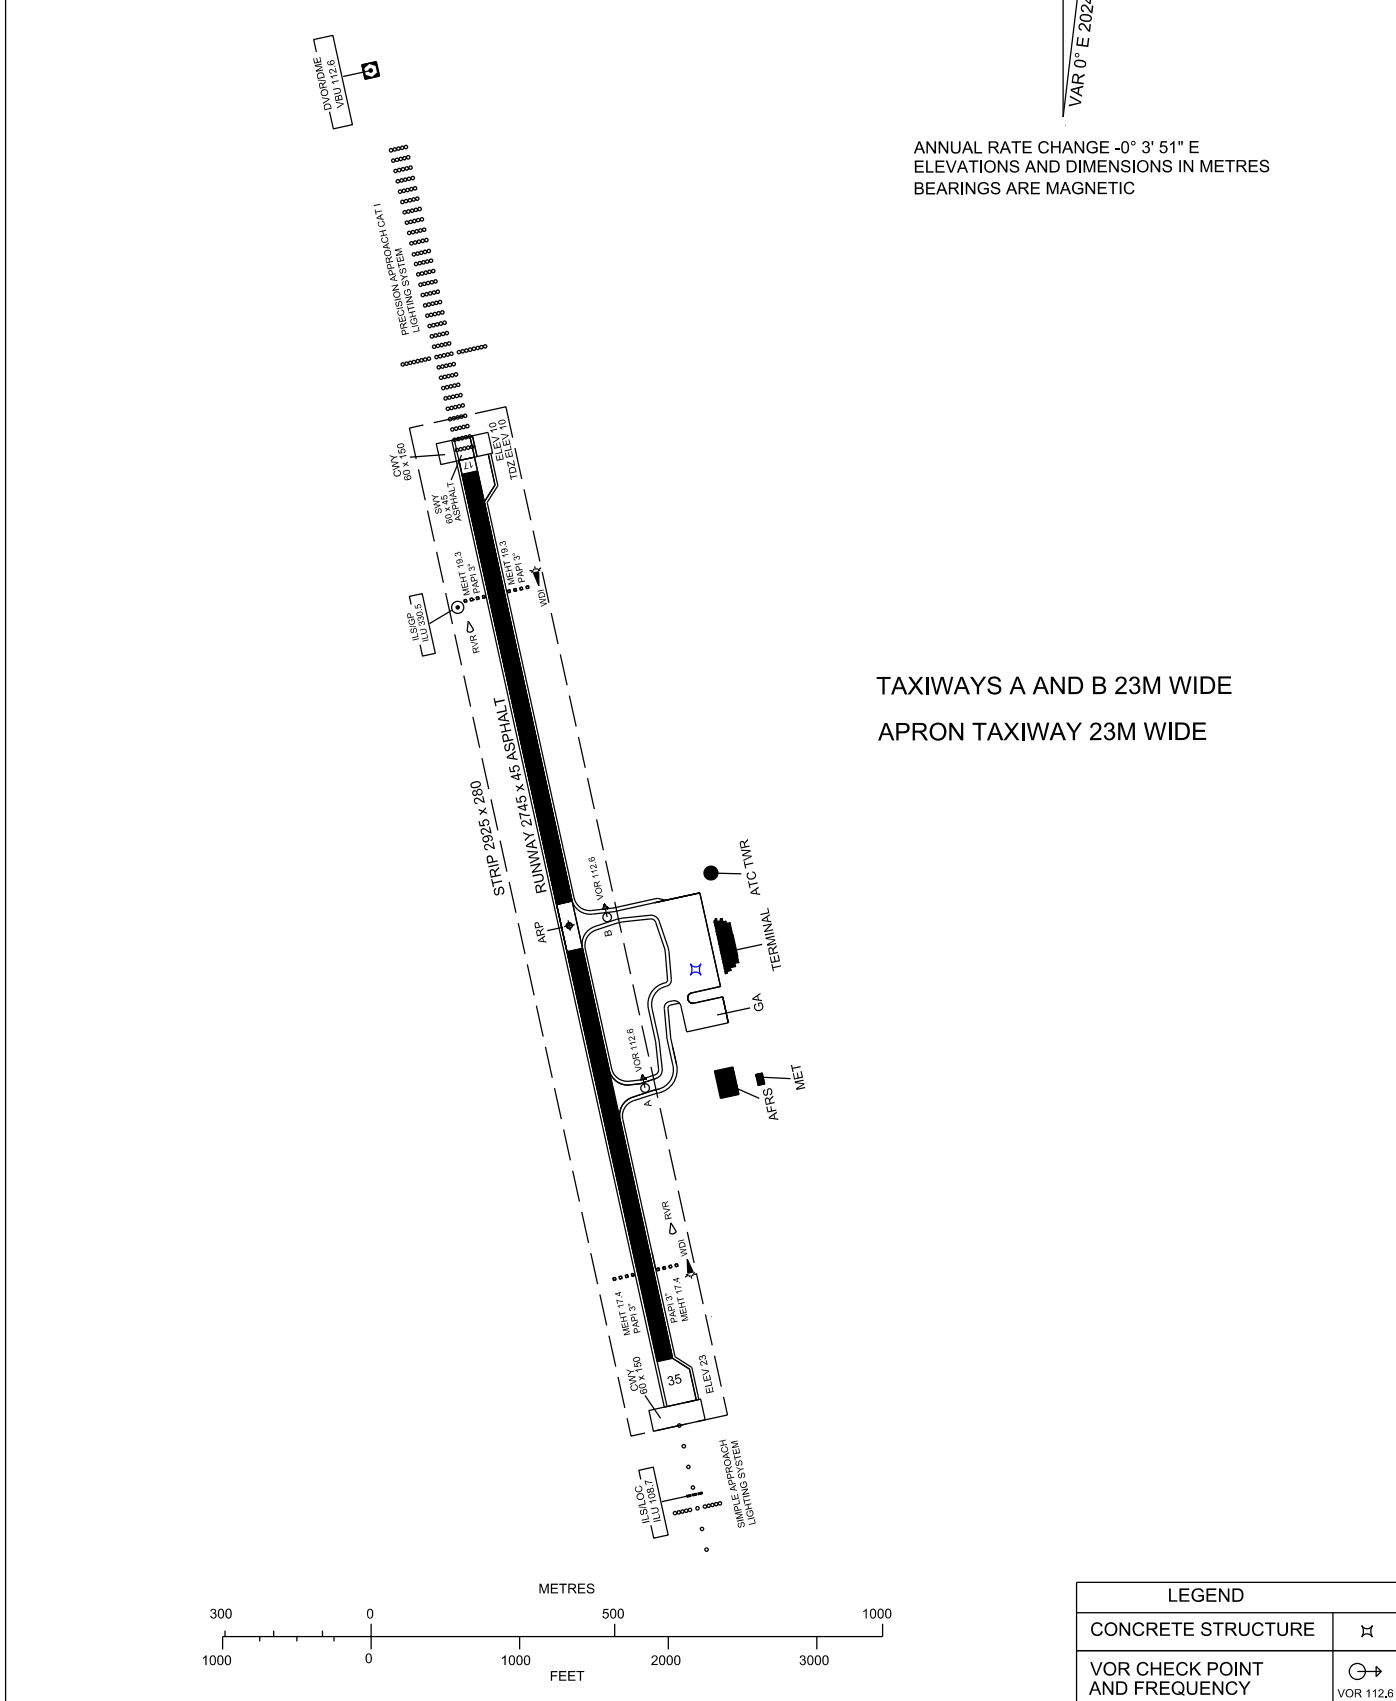

TAXIWAYS A AND B 23M WIDE
APRON TAXIWAY 23M WIDE

LEGEND	
CONCRETE STRUCTURE	☒
VOR CHECK POINT AND FREQUENCY	⊕ VOR 112.6

CHANGES : PAVEMENT BEARING STRENGTH
MAGNETIC VARIATION AND ANNUAL CHANGE
ADD INFORMATION ON MEHT VALUE
RUNWAY STRIPS WIDTH
PATTERN OF APPROACH LIGHTS
ADD INFORMATION ON CLEARWAY
ADD INFORMATION ON LEGEND
MAGNETIC BEARING