

**AIRCRAFT PARKING/  
DOCKING CHART - ICAO**


APRON ELEV  
10 M

RWY 32L/14R	TWR 118.500	GND 121.800	GND 122.525
KLIA (TERMINAL 2)	GND 121.725	GND 122.550	GND 130.750

RWY 33/15	TWR 119.800	GND 118.050
ACD	126.0	128.15

**SEPANG/  
KL INTERNATIONAL  
AIRPORT**


**TERMINAL 2**

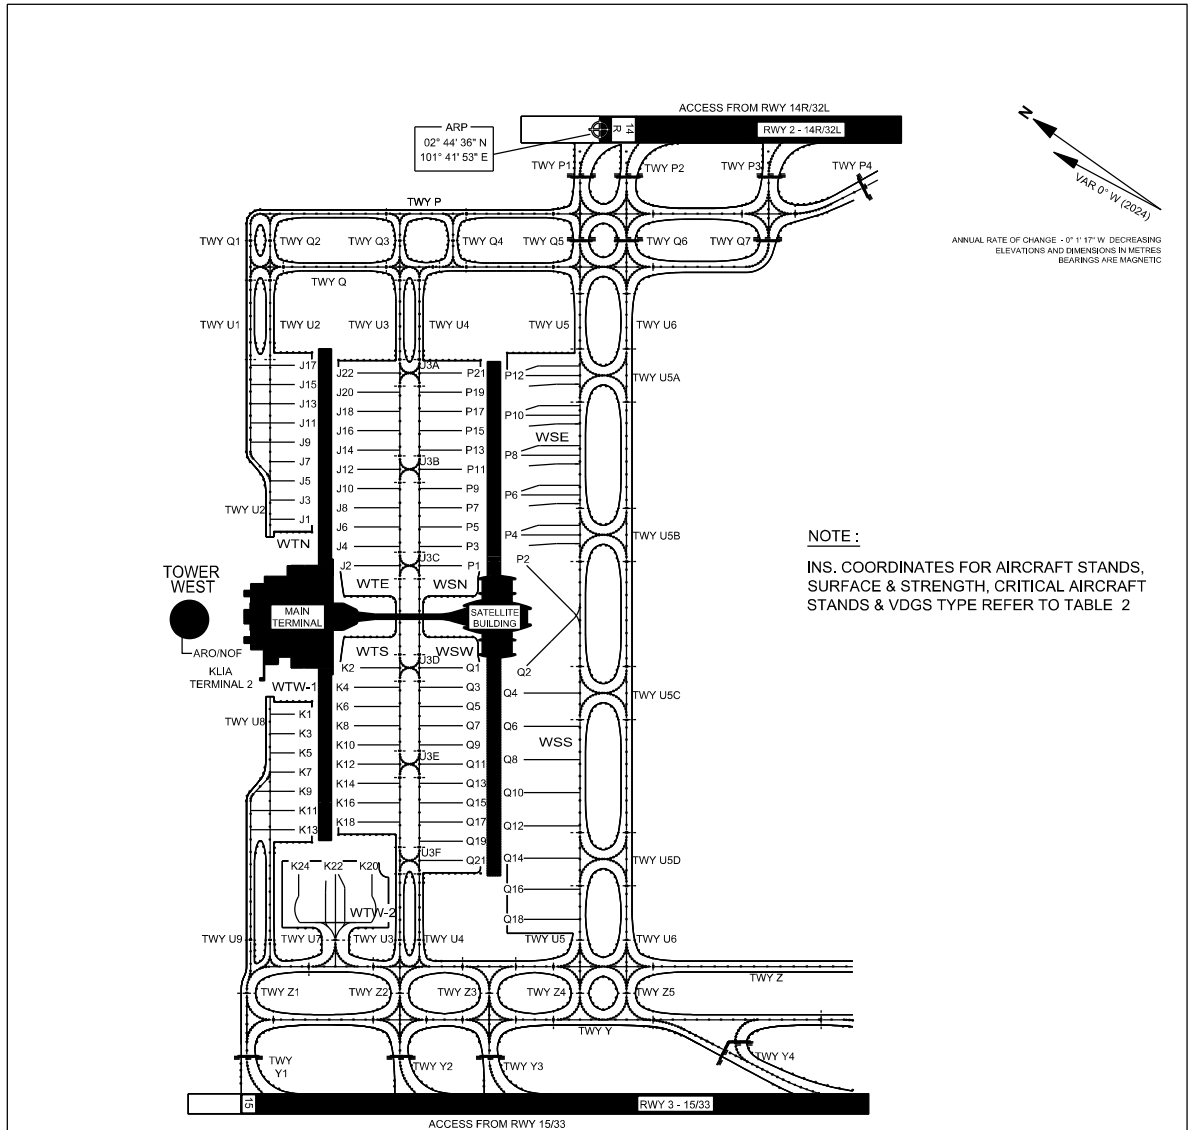

ANNUAL RATE OF CHANGE - 0° 1' 17" W DECREASING  
ELEVATIONS AND DIMENSIONS IN METRES  
BEARINGS ARE MAGNETIC

**NOTE :**  
INS. COORDINATES FOR AIRCRAFT STANDS,  
SURFACE & STRENGTH, CRITICAL AIRCRAFT  
STANDS & VDGTS TYPE REFER TO TABLE 2

- TWY U3A UNTIL U3F, P & Q (CODE C), Q1 UNTIL Q4 18 M WIDE
- TWY U6, U5A UNTIL U5D, P & Q (CODE E & F), P1 UNTIL P4, Q5, Q6, Q7, Y & Z 25 M WIDE
- TWY Y1 & Y9 31 M WIDE
- TWY Z1 33 M WIDE
- TWY Y6 & Y7 34 M WIDE
- TWY Y2 UNTIL Y5 & Y8 35 M WIDE
- TWY Z2 UNTIL Z8 40 M WIDE
- TWY U7 61 M WIDE
- APN TWY U3 & U4 18 M WIDE
- APN TWY U5 25 M WIDE
- ACFT STAND TAXILANE U1, U2, U8 & U9 18 M WIDE
- BEARING STRENGTH P1, P2, Y1, Y2, Y8 & Y9 PCR 1179/R/C/W/U
- BEARING STRENGTH TWY P & Q (CODE C) PCR 1232/F/D/X/U
- BEARING STRENGTH U3A UNTIL U3F, Q1 UNTIL Q4, U3, U4, U1, U2, U8 & U9 PCR 651/F/D/X/U
- BEARING STRENGTH TWY U6, P & Q (CODE E & F), Y, Z, U5A UNTIL U5D, P3, P4, Q5, Q6, Q7 Y3 UNTIL Y7, Z1 UNTIL Z8, U5 & U7 PCR 1232/F/D/X/U



LEGEND	
AIRCRAFT STAND	P3
TAXIWAY LIGHTS	●
RUNWAY-HOLDING POSITION	— —
INTERMEDIATE HOLDING POSITION	- - - -

**CHANGES :** UPDATE INFORMATION ON TWY, APN TWY, ACFT STAND TAXILANE WIDTH AND BEARING STRENGTH