



APRON ELEV
19 M

TWR/APP	122.30 (P)
	119.25 (S)
SMC	121.5
ATIS	127.8


BINTULU/
BINTULU AIRPORT

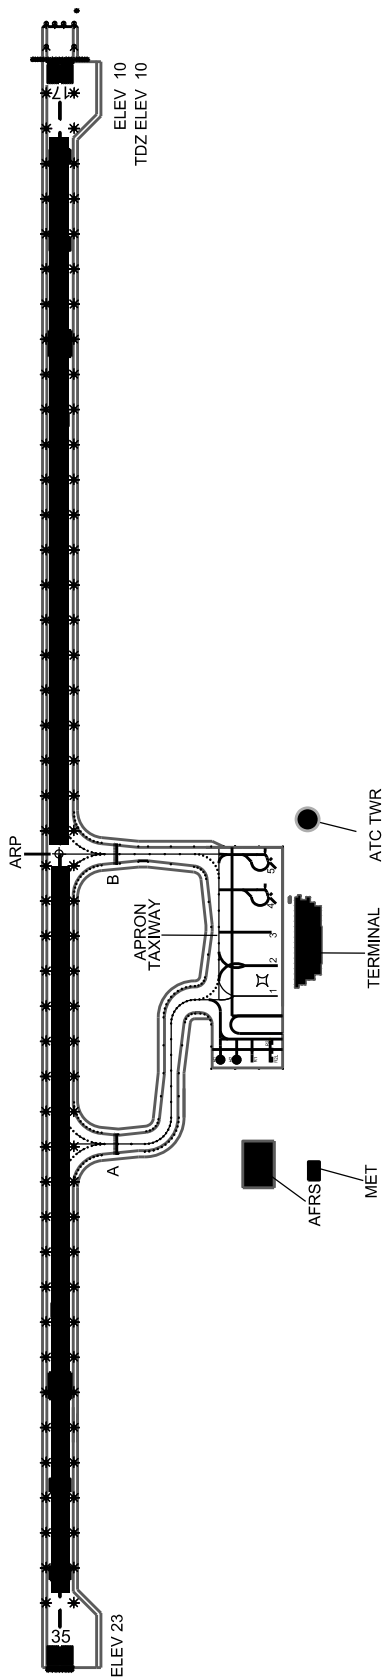

ANNUAL RATE CHANGE -0° 3' 51" E
ELEVATIONS AND DIMENSIONS
IN METRES BEARINGS ARE
MAGNETIC

TAXIWAYS A AND B 23M WIDE
APRON TAXIWAY 23M WIDE
BEARING STRENGTH TWY A PCR 564/F/A/W/U
BEARING STRENGTH TWY B PCR 564/F/A/W/U
BEARING STRENGTH APRON TWY PCR 702/R/B/W/U

TAXIWAY EDGE LIGHTS ON ALL TAXIWAYS
TAXIWAY CENTRE LINE LIGHTS ON ALL TAXIWAYS

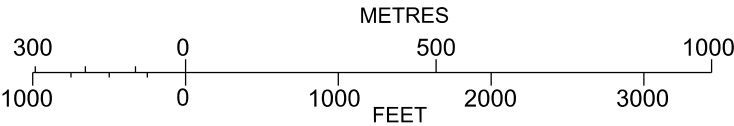

LEGEND	
CONCRETE STRUCTURE	≡
RUNWAY-HOLDING POSITION	≡≡≡
RUNWAY LIGHT	*
TAXIWAY LIGHT	.

CHANGES : APRON CONFIGURATION
ATIS RADIO FREQUENCY