AERODROME/HELIPORT CHART - ICAO

01° 38' 26" N
103° 40' 13" E

ELEV 41 M

SMC	121.80 MHZ
TWR	118.15 MHZ
APP	124.70 MHZ
	121.05 MHZ
ATIS	123.05 MHZ

JOHOR BAHRU SENAI INTERNATONAL AIRPORT

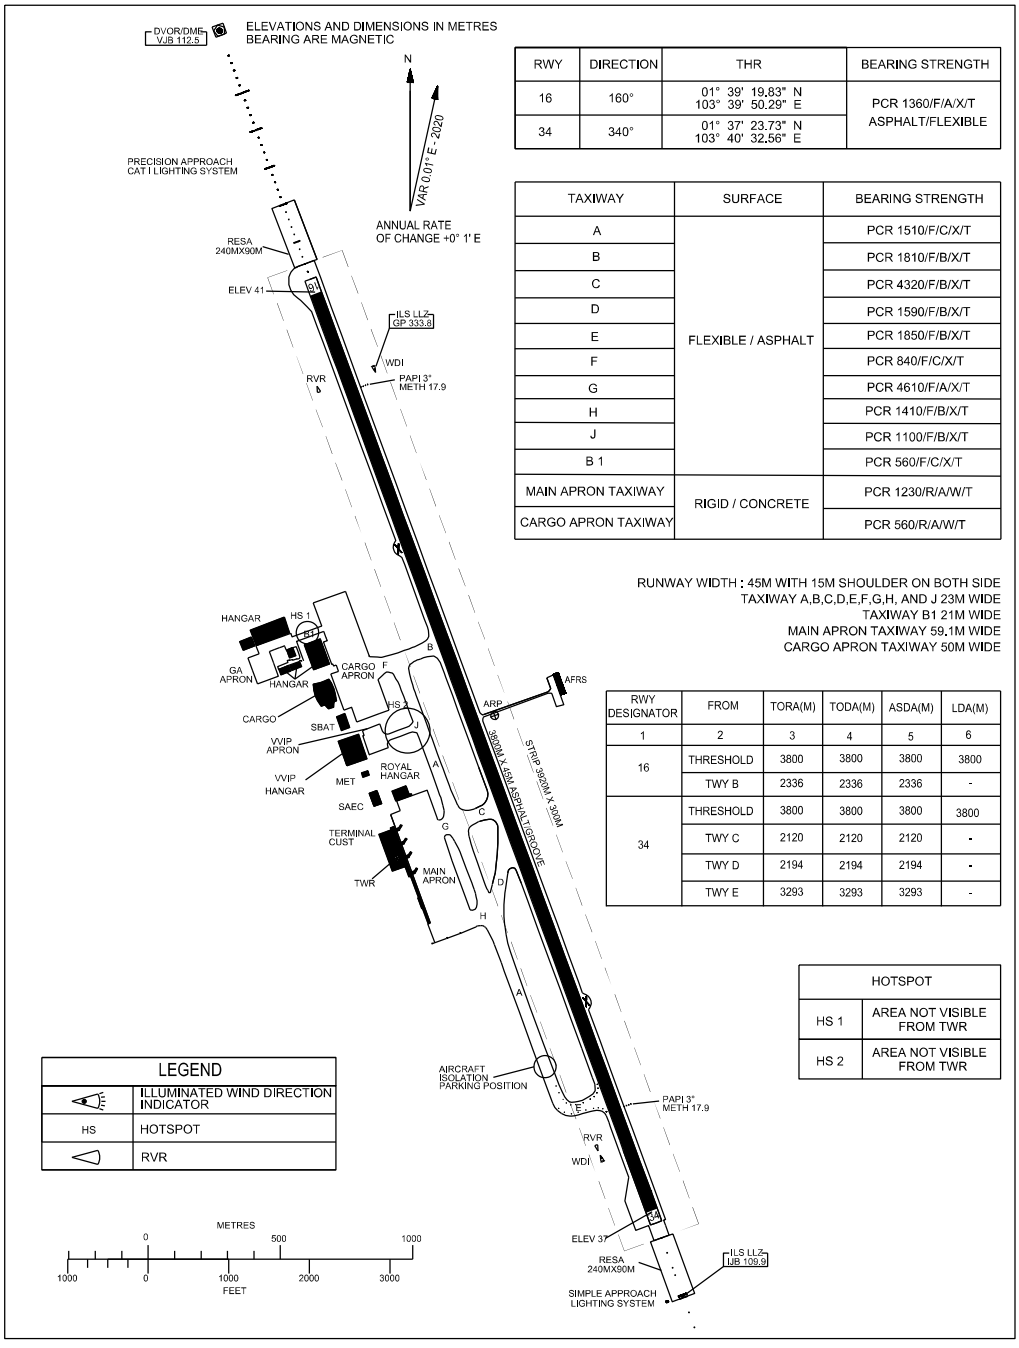

RWY	DIRECTION	THR	BEARING STRENGTH
16	160°	01° 39' 19.83" N 103° 39' 50.29" E	PCR 1360/F/A/X/T ASPHALT/FLEXIBLE
34	340°	01° 37' 23.73" N 103° 40' 32.56" E	

TAXIWAY	SURFACE	BEARING STRENGTH
A	FLEXIBLE / ASPHALT	PCR 1510/F/C/X/T
B		PCR 1810/F/B/X/T
C		PCR 4320/F/B/X/T
D		PCR 1590/F/B/X/T
E		PCR 1850/F/B/X/T
F		PCR 840/F/C/X/T
G		PCR 4610/F/A/X/T
H		PCR 1410/F/B/X/T
J		PCR 1100/F/B/X/T
B 1		PCR 560/F/C/X/T
MAIN APRON TAXIWAY	RIGID / CONCRETE	PCR 1230/R/A/W/T
CARGO APRON TAXIWAY		PCR 560/R/A/W/T

RUNWAY WIDTH : 45M WITH 15M SHOULDER ON BOTH SIDE
TAXIWAY A,B,C,D,E,F,G,H, AND J 23M WIDE
TAXIWAY B1 21M WIDE
MAIN APRON TAXIWAY 59.1M WIDE
CARGO APRON TAXIWAY 50M WIDE

RWY DESIGNATOR	FROM	TORA(M)	TODA(M)	ASDA(M)	LDA(M)
1	2	3	4	5	6
16	THRESHOLD	3800	3800	3800	3800
	TWY B	2336	2336	2336	-
34	THRESHOLD	3800	3800	3800	3800
	TWY C	2120	2120	2120	-
	TWY D	2194	2194	2194	-
	TWY E	3293	3293	3293	-

HOTSPOT	
HS 1	AREA NOT VISIBLE FROM TWR
HS 2	AREA NOT VISIBLE FROM TWR

LEGEND	
	ILLUMINATED WIND DIRECTION INDICATOR
HS	HOTSPOT
	RVR

CHANGES : REPLACEMENT CHART