AERODROME GROUND MOVEMENT CHART - ICAO

APRON ELEV
5 M

TWR 123.6 (PRY)
119.05 (SRY)
235.32 (UHF)
121.5 (EMERG)
SMC 121.6
ATIS 126.65

KUALA TERENGGANU/ SULTAN MAHMUD AIRPORT

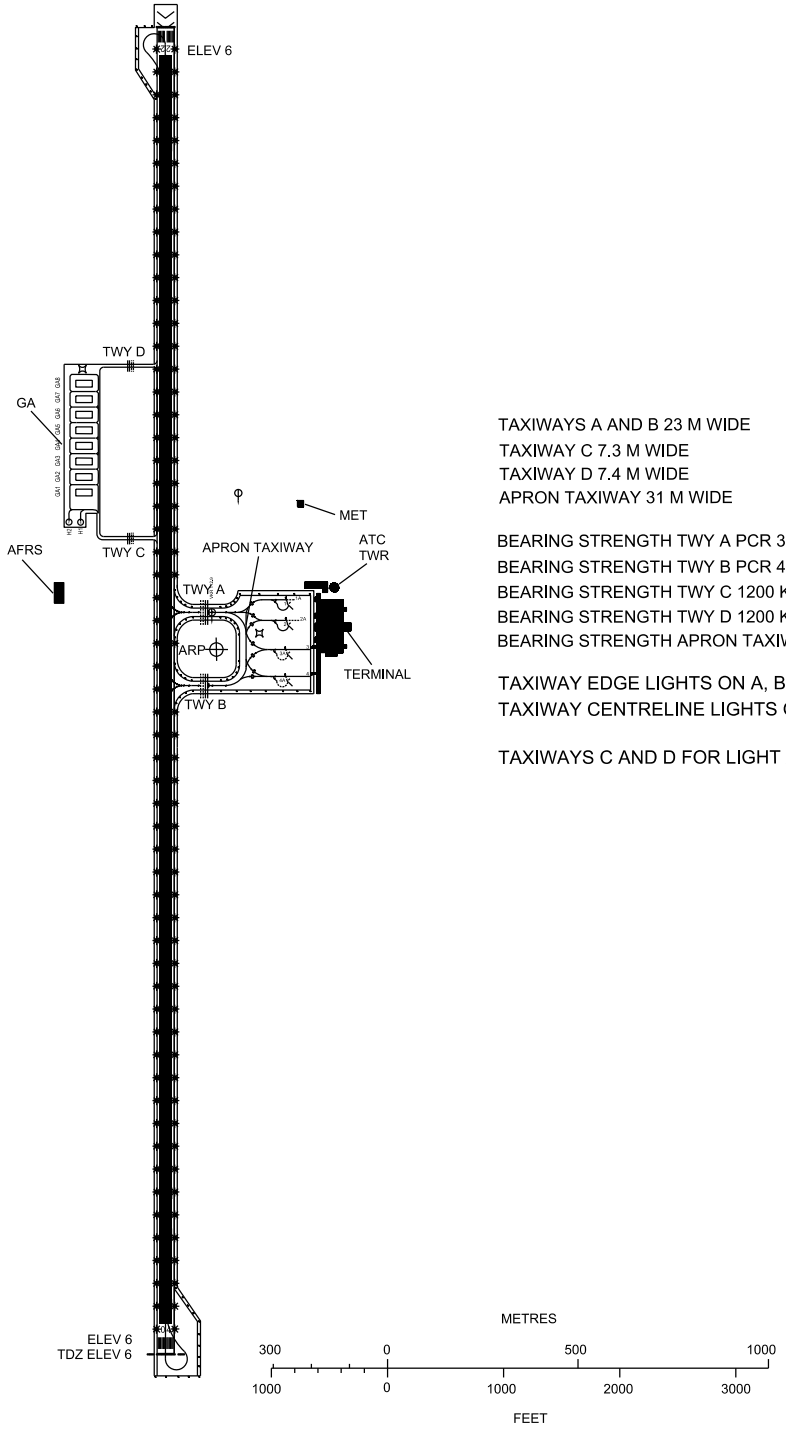



ANNUAL RATE OF CHANGE -0° 1' 51" W
ELEVATIONS AND DIMENSIONS
IN METRES
BEARINGS ARE MAGNETIC

TAXIWAYS A AND B 23 M WIDE
TAXIWAY C 7.3 M WIDE
TAXIWAY D 7.4 M WIDE
APRON TAXIWAY 31 M WIDE

BEARING STRENGTH TWY A PCR 399/F/A/W/U
BEARING STRENGTH TWY B PCR 474/F/C/W/U
BEARING STRENGTH TWY C 1200 KG / NO PRESSURE LIMIT
BEARING STRENGTH TWY D 1200 KG / NO PRESSURE LIMIT
BEARING STRENGTH APRON TAXIWAY PCR 554/R/B/W/U

TAXIWAY EDGE LIGHTS ON A, B, C AND D CURVES
TAXIWAY CENTRELINE LIGHTS ON A AND B

TAXIWAYS C AND D FOR LIGHT AIRCRAFT

LEGEND	
CONCRETE STRUCTURE	
RUNWAY-HOLDING POSITION	
RUNWAY LIGHT	
TAXIWAY LIGHT	
STOP BAR	
VOR CHECK POINT AND FREQUENCY	VKR 112.0

CHANGES : PAVEMENT BEARING STRENGTH
TWY WIDTH C AND D