


**STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**

TRANSITION ALTITUDE
11000 FT

TWR 122.30 (P)
119.25 (S)
SMC 121.80
ATIS 127.80

**BINTULU/BINTULU (WBGB)
RNAV (GNSS) RWY 35**

EKETO 1G DUNAS 1G
NOKER 1G BENLI 1G
BASUV 1G ADGAB 1G

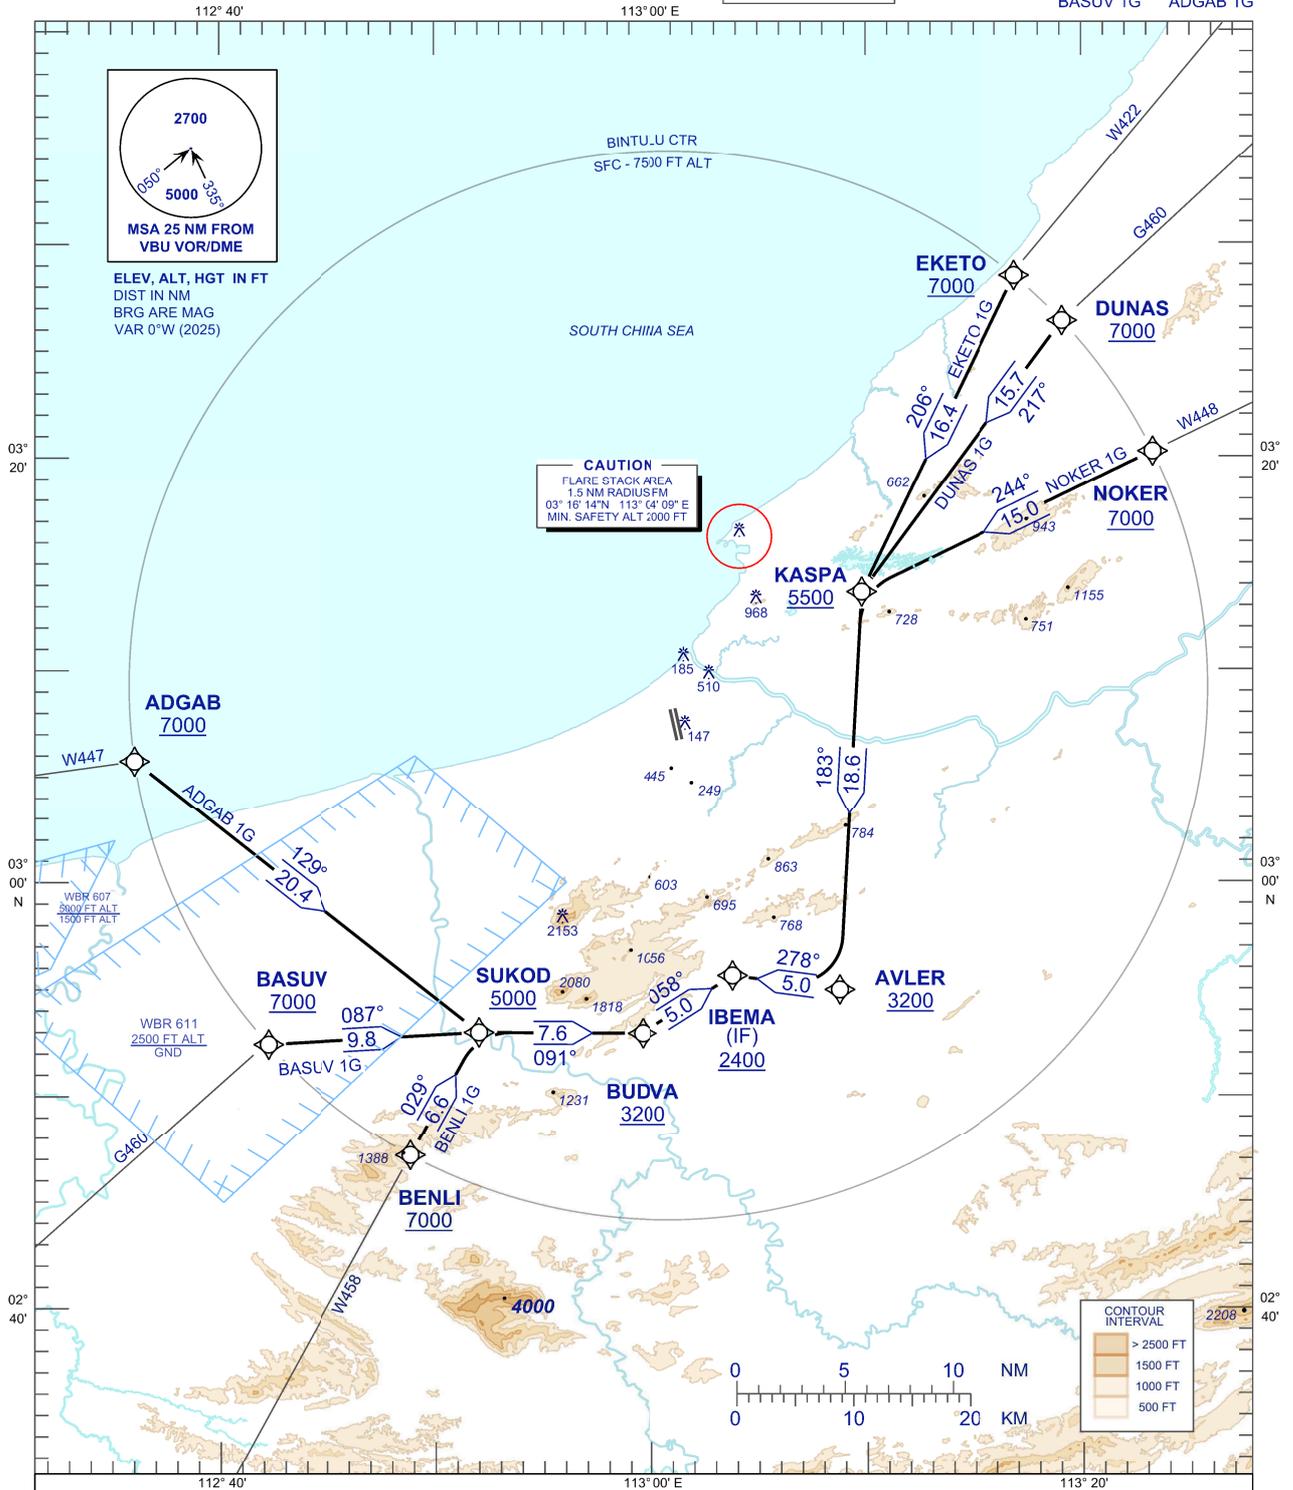

COMMUNICATION FAILURE:

- SET TRANSPONDER TO MODE A/C CODE 7600.
- IF UNDER PILOT NAVIGATION, MAINTAIN ASSIGNED LEVEL FOR 3 MINUTES. IF NO ONWARD CLEARANCE IS RECEIVED, SUBSEQUENTLY DESCENT TO COMPLY WITH STAR.
- IF UNDER RADAR VECTORED, MAINTAIN VECTOR FOR 1 MINUTES. IF BELOW MSA CLIMB TO MSA, THEN TRACK TO INTERCEPT CLEARED OR PREVIOUSLY ASSIGNED STAR TO LAND.

CHANGES : IBEMA (IF) 2200 TO READ AS 2400.