

AERODROME/HELIPORT CHART - ICAO 01° 29' 07" N
110° 20' 42" E

ELEV 27 m

TWR 118.1 (P)	SMC 121.9
	121.7 (S)
APP 120.2 (P)	ATIS 128.4
	123.85 (S)
ACC 134.5 (P)	FIS 134.75
	125.35 (S)


KUCHING/KUCHING INTERNATIONAL AIRPORT

RWY	DIRECTION	THR	BEARING STRENGTH
07	068°	01° 28' 51.63" N 110° 20' 12.87" E	PCN 577/F/A/W/U ASPHALT(FLEXIBLE)
25	248°	01° 29' 36.82" N 110° 22' 06.61" E	




ANNUAL RATE OF CHANGE -0° 3' 6" W
ELEVATIONS AND DIMENSIONS
IN METRES
BEARINGS ARE MAGNETIC

PRECISION APPROACH CAT I
LIGHTING SYSTEM

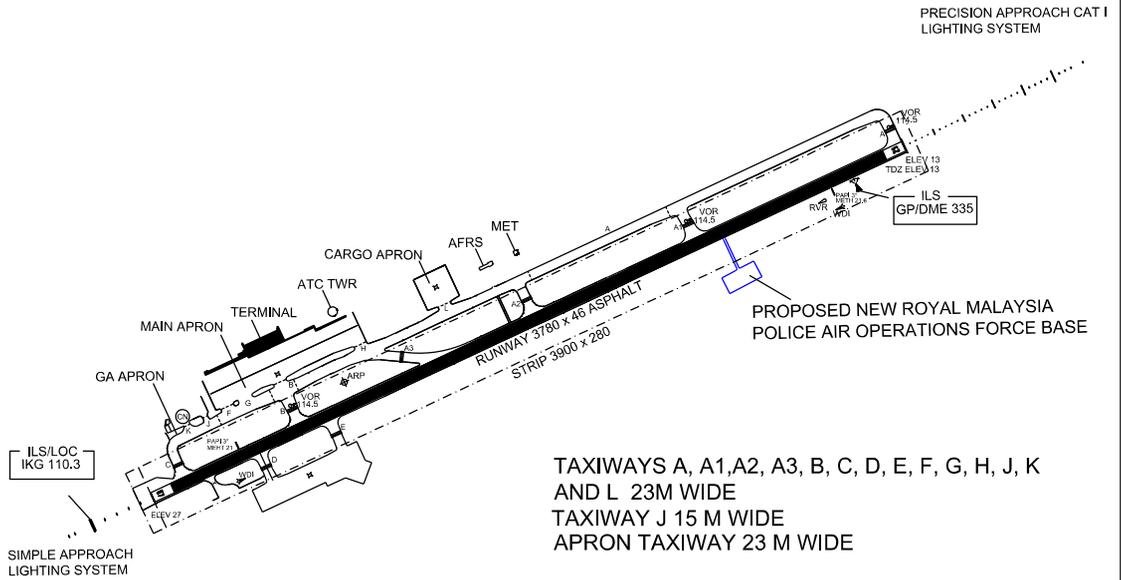

TAXIWAYS A, A1,A2, A3, B, C, D, E, F, G, H, J, K
AND L 23M WIDE
TAXIWAY J 15 M WIDE
APRON TAXIWAY 23 M WIDE



LEGEND	
CONCRETE STRUCTURE	▣
VOR	⊙→

CHANGES: UPDATE BEARING STRENGTH PCR
UPDATE PROPOSED NEW ROYAL MALAYSIA POLICE AIR OPERATIONS FORCE BASE
UPDATE VAR
UPDATE ANNUAL RATE OF CHANGE
UPDATE SCALE