


**ATC SURVEILLANCE MINIMUM  
ALTITUDE CHART - ICAO**

AERODROME ELEVATION 40 FT  
TRANSITION ALT 11 000 FT

TWR	118,00
SMC	121,60
ATIS	127,45

**MALACCA/MALACCA (WMKM)**

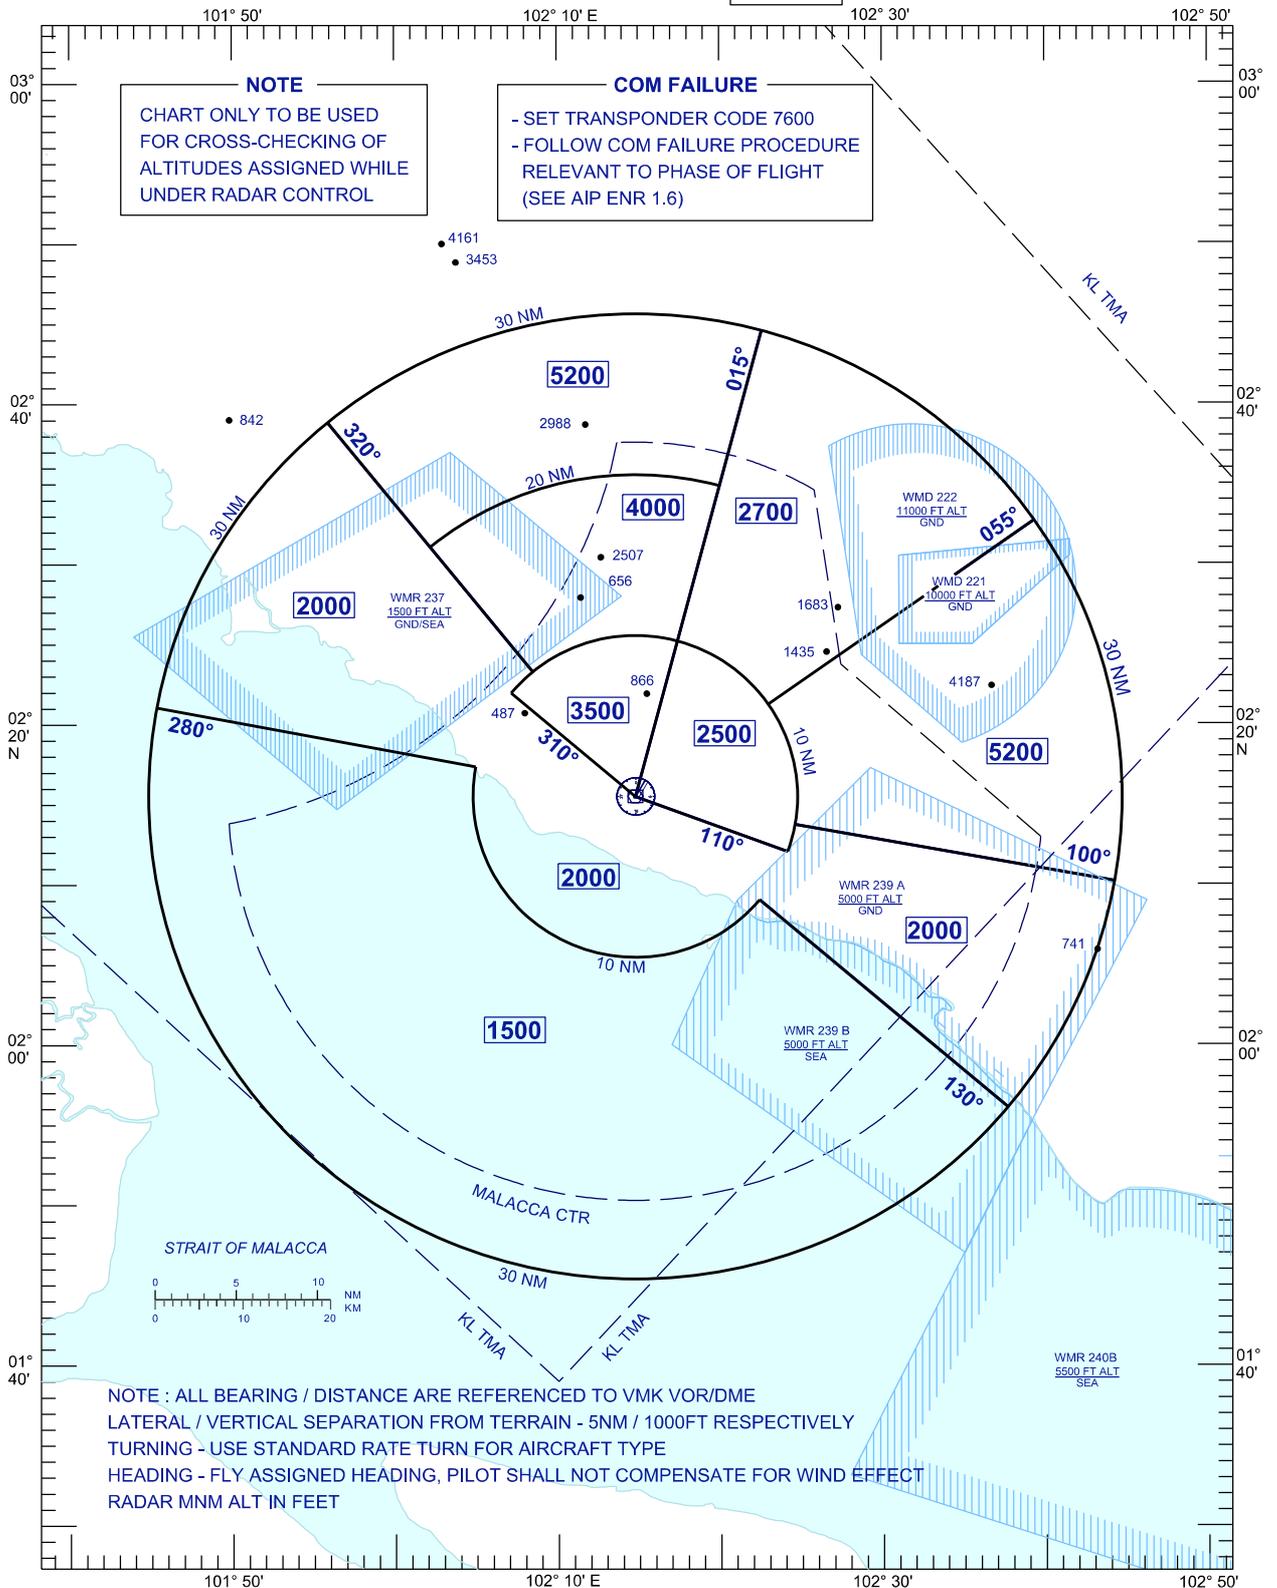

**NOTE**  
CHART ONLY TO BE USED  
FOR CROSS-CHECKING OF  
ALTITUDES ASSIGNED WHILE  
UNDER RADAR CONTROL

**COM FAILURE**  
- SET TRANSPONDER CODE 7600  
- FOLLOW COM FAILURE PROCEDURE  
RELEVANT TO PHASE OF FLIGHT  
(SEE AIP ENR 1.6)

NOTE : ALL BEARING / DISTANCE ARE REFERENCED TO VMK VOR/DME  
LATERAL / VERTICAL SEPARATION FROM TERRAIN - 5NM / 1000FT RESPECTIVELY  
TURNING - USE STANDARD RATE TURN FOR AIRCRAFT TYPE  
HEADING - FLY ASSIGNED HEADING, PILOT SHALL NOT COMPENSATE FOR WIND EFFECT  
RADAR MNM ALT IN FEET

CHANGES : THE CHART TITLE