


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

**MUKAH/MUKAH(WBGK)
RNAV (GNSS) RWY 33**

TRANSITION ALT 11 000FT

APP	122.6 (P)
	124.4 (S)
TWR	118.30 (P)
	118.075 (S)
ATIS	126.200

TOSOD 1K ADGAB 1K BASUV 1K
NOLUS 1K PILAX 1K

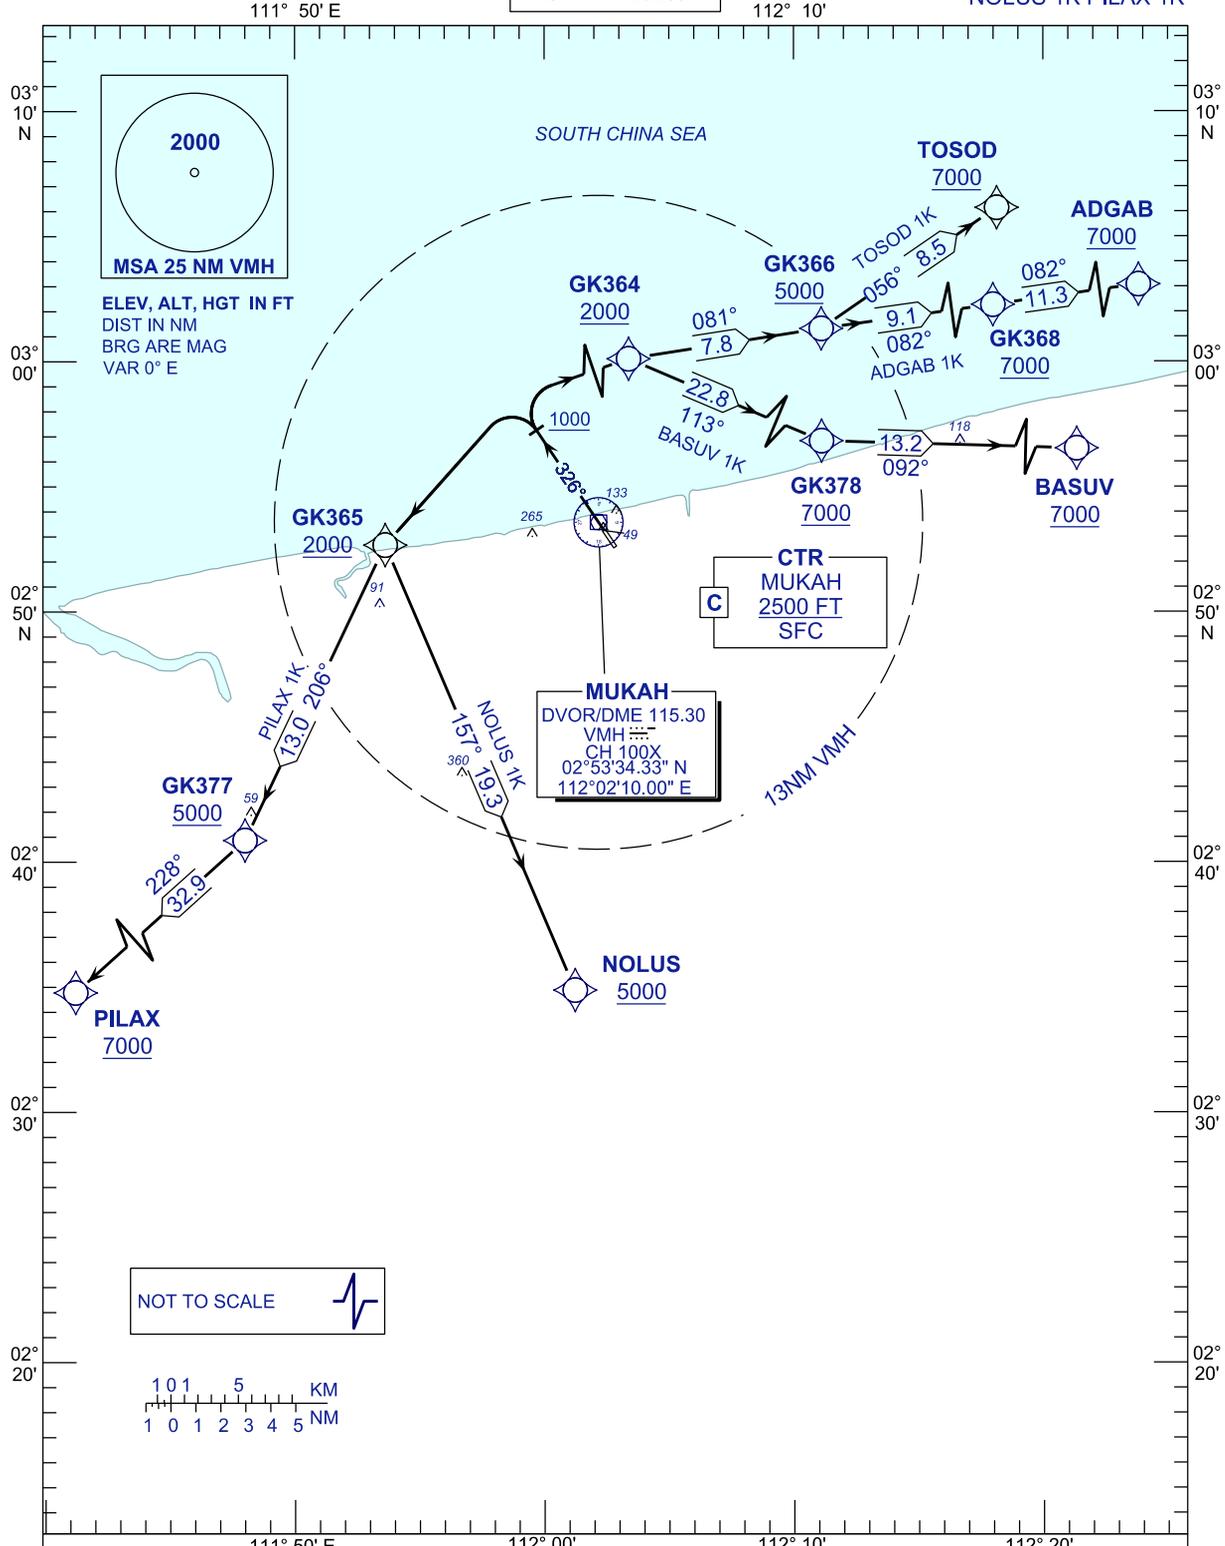

COMMUNICATION FAILURE:
SQUAWK 7600
-IF UNDER PILOT NAVIGATION, MAINTAIN LAST ASSIGNED LEVEL FOR 3 MINUTES, IF NO ONWARDS CLEARANCE IS RECEIVED SUBSEQUENTLY CLIMB TO COMPLY WITH SID TO DESTINATION
-IF UNDER RADAR VECTORED, MAINTAIN VECTOR FOR 1 MINUTE, IF BELOW MSA CLIMB TO MSA, THEN TRACK TO INTERCEPT CLEARED OR PREVIOUSLY ASSIGNED SID TO DESTINATION.

CHANGES : VERTICAL LIMITS FOR MUKAH CONTROL ZONE
COORDINATES FOR MUKAH DVOR/DME