


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

TRANSITION ALTITUDE
11000 ft

TWR 118.10 , 238.10
GND 120.40 , 263.90
APP 119.70 , 249.30
ATIS 127.50 , 253.80
SRA 118.70 , 261.60

**KUANTAN/SULTAN AHMAD
SHAH (WMKD)
RNAV (GNSS) RWY 36**
OSTIN 1C VPK 1C
MEVOK 1C OSIKU 1C
DAGAD 1C

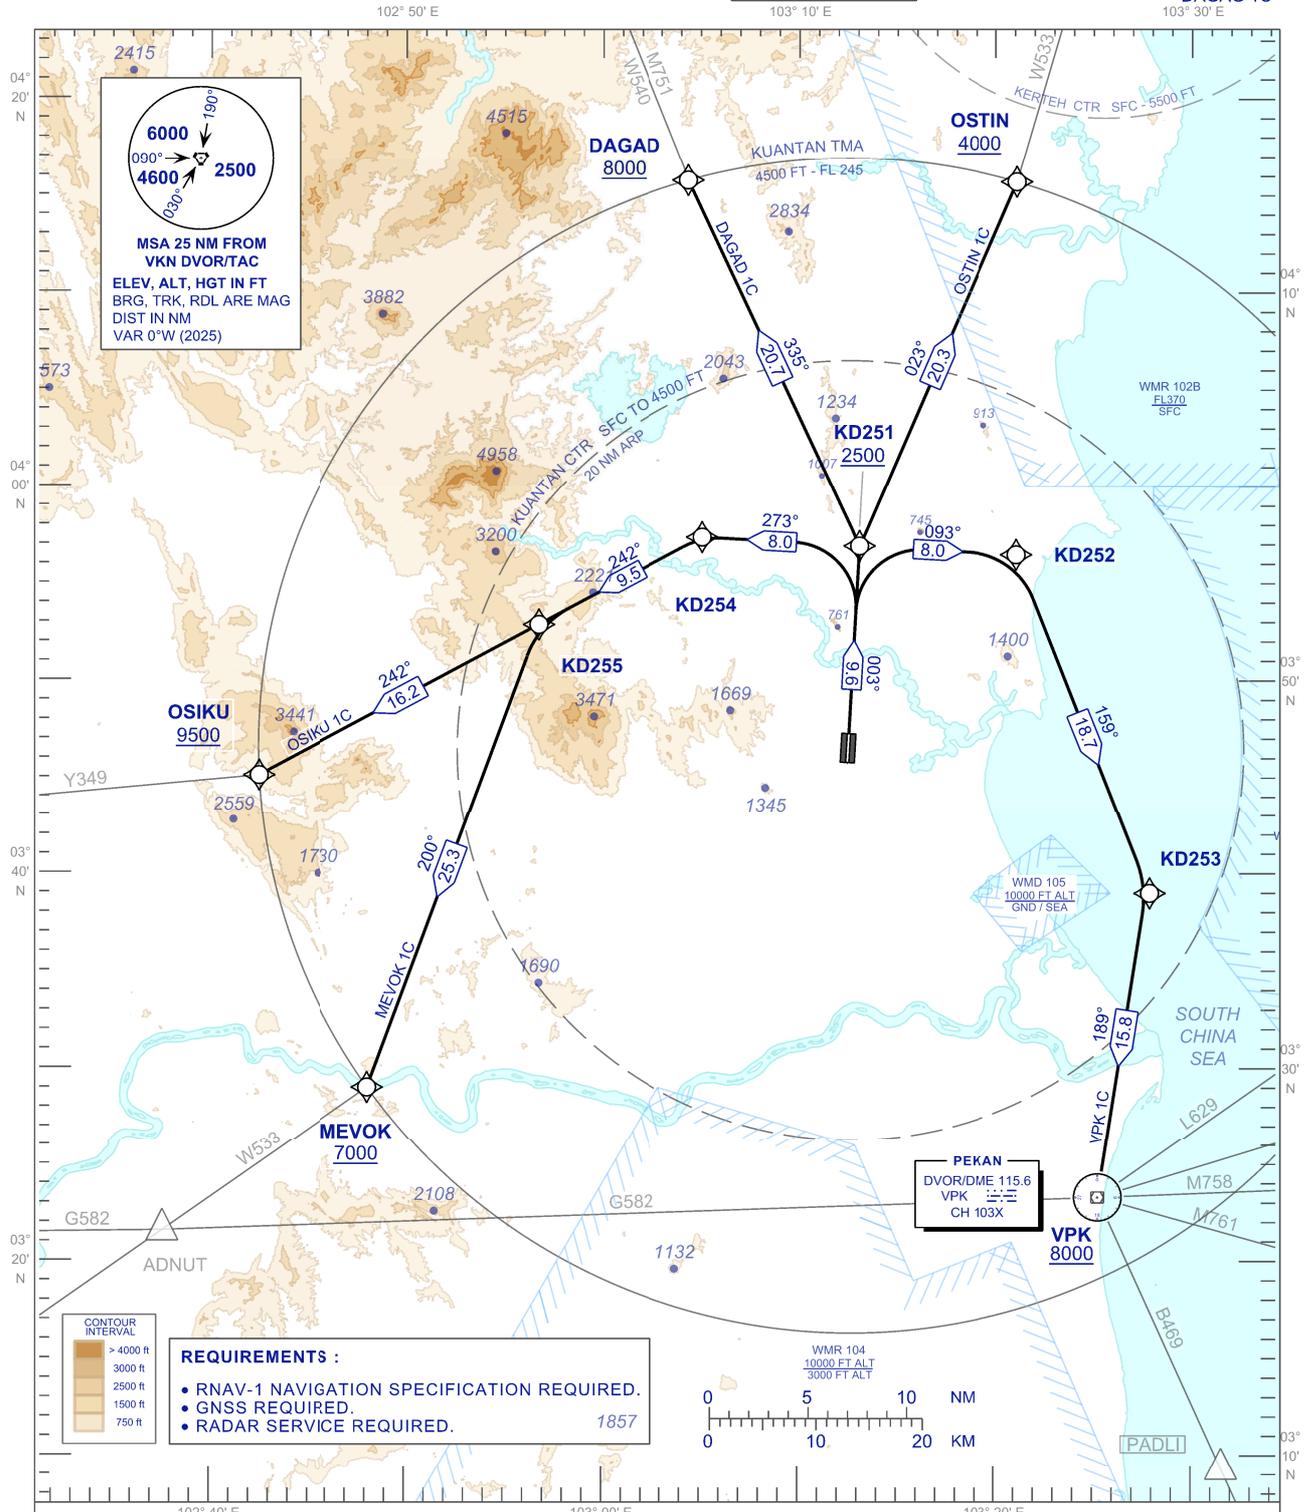

REQUIREMENTS :

- RNAV-1 NAVIGATION SPECIFICATION REQUIRED.
- GNSS REQUIRED.
- RADAR SERVICE REQUIRED.

1857

COMMUNICATION FAILURE:

- SET TRANSPONDER MODE A CODE 7600.
- IF UNDER PILOT NAVIGATION, MAINTAIN LAST ASSIGNED LEVEL FOR 3 MINUTES. IF NO ONWARD CLEARANCE IS RECEIVED, SUBSEQUENTLY CLIMB TO COMPLY WITH THE SID LEVEL REQUIREMENTS.
- IF UNDER RADAR VECTORED, MAINTAIN VECTOR AND LEVEL FOR 2 MINUTES. IF BELOW MSA, CLIMB TO MSA THEN INTERCEPT THE FLIGHT PLAN ROUTE ON ASSIGNED SID TO DESTINATION.