


**AERODROME/HELIPORT
CHART - ICAO** 01° 29' 07" N ELEV 27 M
110° 20' 42" E


TWR	118.1 (P)	SMC	121.9
	121.7 (S)	ATIS	128.4
APP	120.2 (P)	FIS	134.75
	123.85 (S)		
ACC	134.5 (P)		
	125.35 (S)		

**KUCHING/KUCHING
INTERNATIONAL AIRPORT**


RWY	DIRECTION	THR	BEARING STRENGTH
07	068°	01° 28' 51.63" N 110° 20' 12.87" E	PCR 681/F/A/W/U ASPHALT (FLEXIBLE)
25	248°	01° 29' 36.82" N 110° 22' 06.61" E	



ANNUAL RATE OF CHANGE -0° 3' 6" W
ELEVATIONS AND DIMENSIONS
IN METRES
BEARINGS ARE MAGNETIC

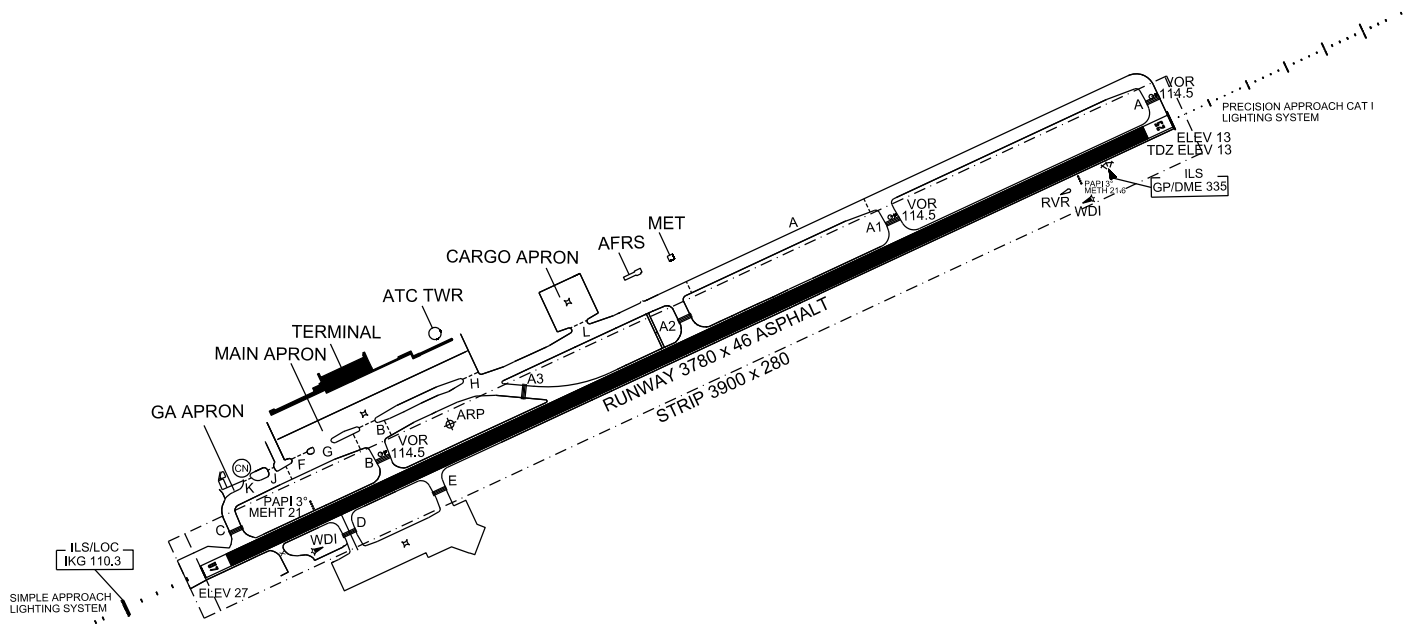

TAXIWAYS A, A1, A2, A3, B, C, D, E, F, G, H, K AND L 23M WIDE
TAXIWAY J 15 M WIDE
APRON TAXIWAY 23 M WIDE



LEGEND	
CONCRETE STRUCTURE	▣
VOR	⊙→

CHANGES:PAVEMENT BEARING STRENGTH
UPDATE SCALE