


STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

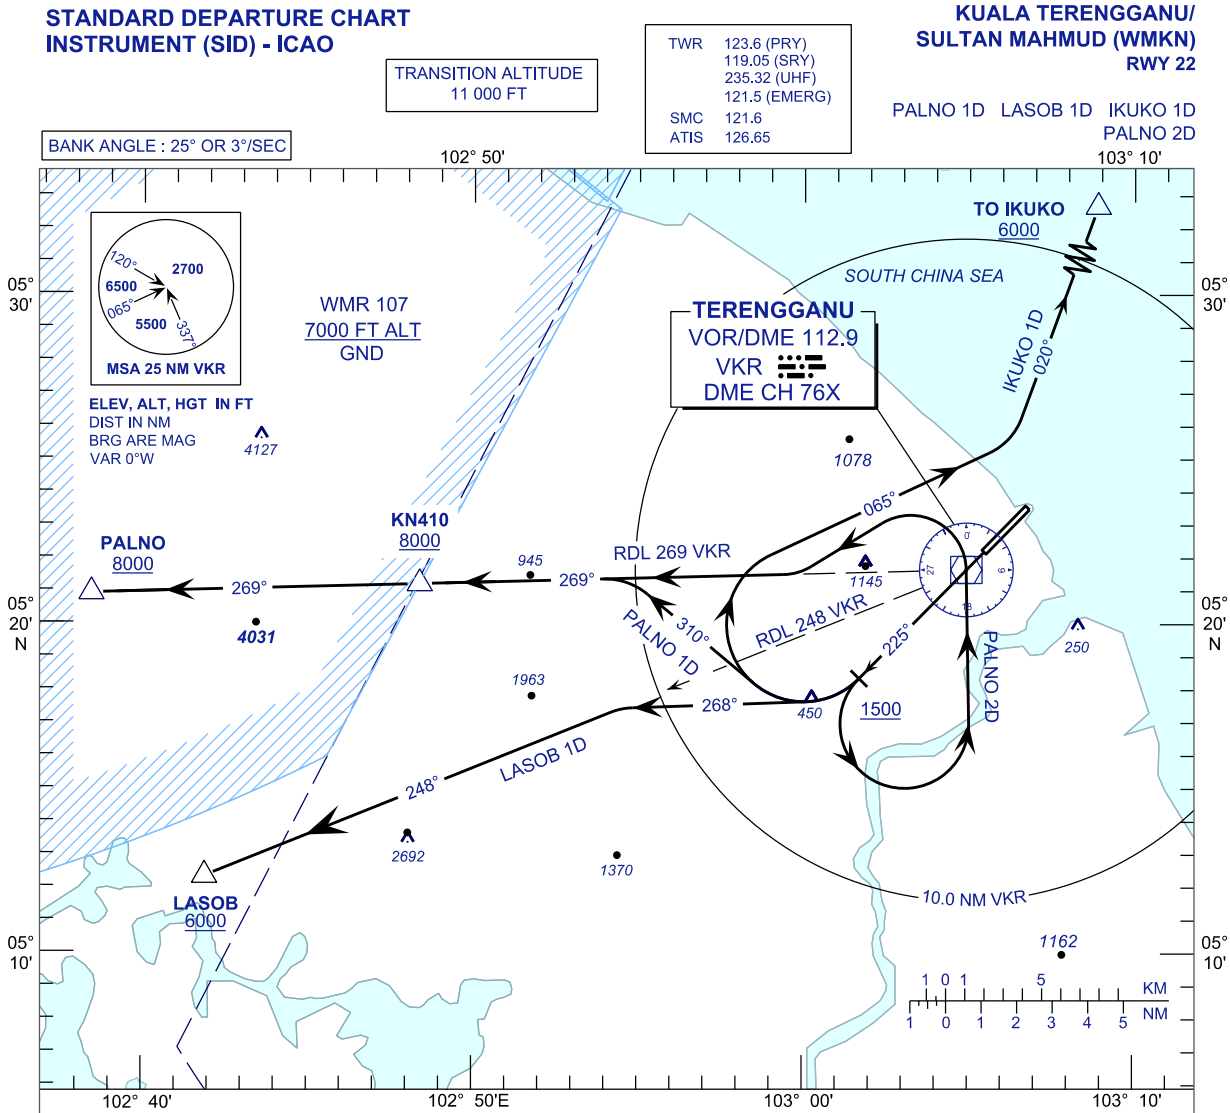

INITIAL CLIMB PROCEDURE	DESIGNATOR	SID DESCRIPTION
TRACK 225° AT OR ABOVE 1500 FT THEN TURN RIGHT NOTE: MINIMUM CLIMB GRADIENT 4.5%	IKUKO 1D	TRACK 065° TO INTERCEPT RDL020 VCR VOR OUTBOUND TO IKUKO THEN R208 NOTE: MINIMUM CLIMB GRADIENT 4.5% UNTIL COMPLETE TURN
	PALNO 1D	TRACK 310° TO INTERCEPT RDL269 VCR VOR OUTBOUND TO PALNO THEN M751/W540 (NORTHBOUND) NOTE: MINIMUM CLIMB GRADIENT 4.5% UNTIL PALNO
	LASOB 1D	TRACK 268° TO INTERCEPT RDL248 VCR VOR OUTBOUND TO LASOB THEN Y346 (SOUTHBOUND) NOTE: MINIMUM CLIMB GRADIENT 4.0% UNTIL LASOB
TRACK 225° AT OR ABOVE 1500 FT THEN TURN LEFT NOTE: MINIMUM CLIMB GRADIENT 4.5%	PALNO 2D NOTE: TO BE USED DURING WMR107 ACTIVE	DIRECT TO VCR THEN CONTINUE ON RDL269 VCR VOR OUTBOUND TO KN410 AT 8000 FT OR ABOVE. AFTER THAT DIRECT TO PALNO THEN M751/W540 (NORTHBOUND) NOTE: MINIMUM CLIMB GRADIENT 4.5% UNTIL 5000FT

RATE OF CLIMB (FT/MIN)						
GND SPEED - KT		120	150	180	210	240
GRADIENT	3.3%	401	501	602	702	802
	4.0%	486	608	729	851	972
	4.5%	547	684	820	957	1094

CHANGES : ATS COMMUNICATION FREQUENCIES