


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 69 ft
HEIGHT RELATED TO
THR RWY 32R - ELEV 69 ft

APP	TWR	SMC	D-ATIS ID-WMKK
121.25	118.50	121.65	128.05
120.35	118.80		
135.75			

SEPANG/KL INTERNATIONAL
AIRPORT (WMKK)


RNP Z RWY 32R (AR)

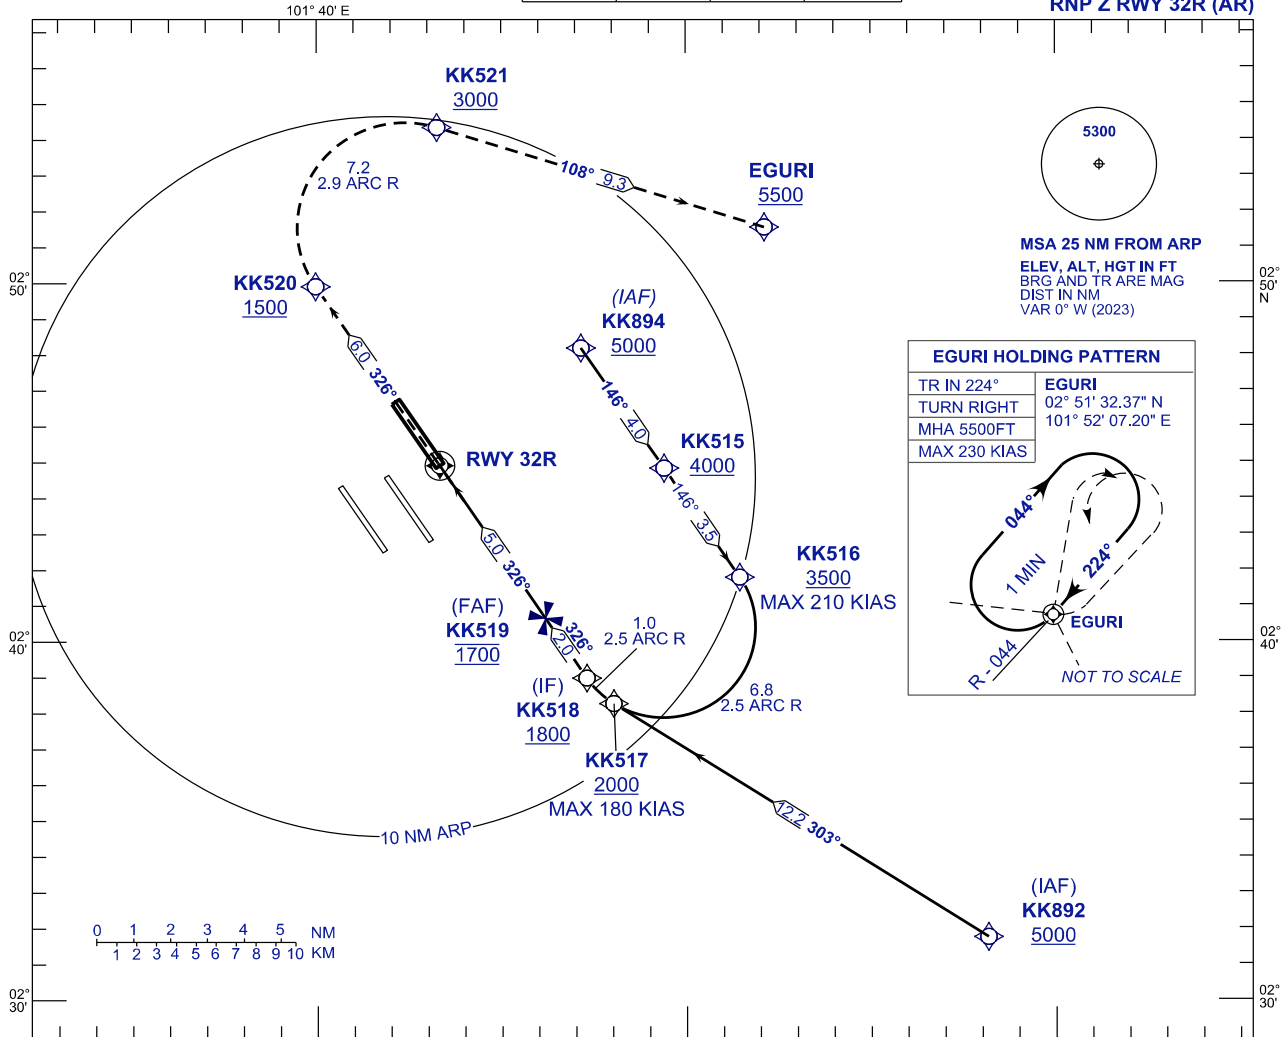

VPA 2.9°
RDH 56 ft

MISSED APPROACH
CLIMB TO 5500FT OR ABOVE VIA RNP (AR) MISSED APPROACH,
TRACK TO EGURI AND HOLD OR AS DIRECTED BY ATC

TRANSITION LEVEL FL130
TRANSITION ALT 11 000 ft

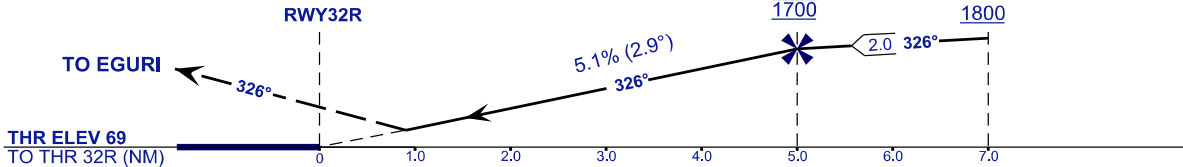

STRAIGHT - IN APPROACH	OCA (OCH)	
CATEGORY OF AIRCRAFT	C	D
RNP (0.30)	499 (430)	
CIRCLING AND ALTERNATE N/A		

AUTHORIZATION REQUIRED

NOTES

- 1) APPROACH NOT AUTHORIZED WHEN AIRPORT TEMPERATURE BELOW 18°C OR ABOVE 40°C.
- 2) RF REQUIRED.
- 3) WMKK ALTIMETER SETTING REQUIRED.
- 4) GNSS REQUIRED.
- 5) PAPI AND VERTICAL PATH ANGLE NOT COINCIDENT.
- 6) RNP 0.30 FROM IAFS TO THRESHOLD.
- 7) RNP 0.50 FROM RWY32R TO KK520

DISTANCE IN NM, BEARING ARE MAGNETIC. ELEVATION IN FEET AMSL.

CHANGES : FREQUENCY ATIS TO D-ATIS ID-WMKK.