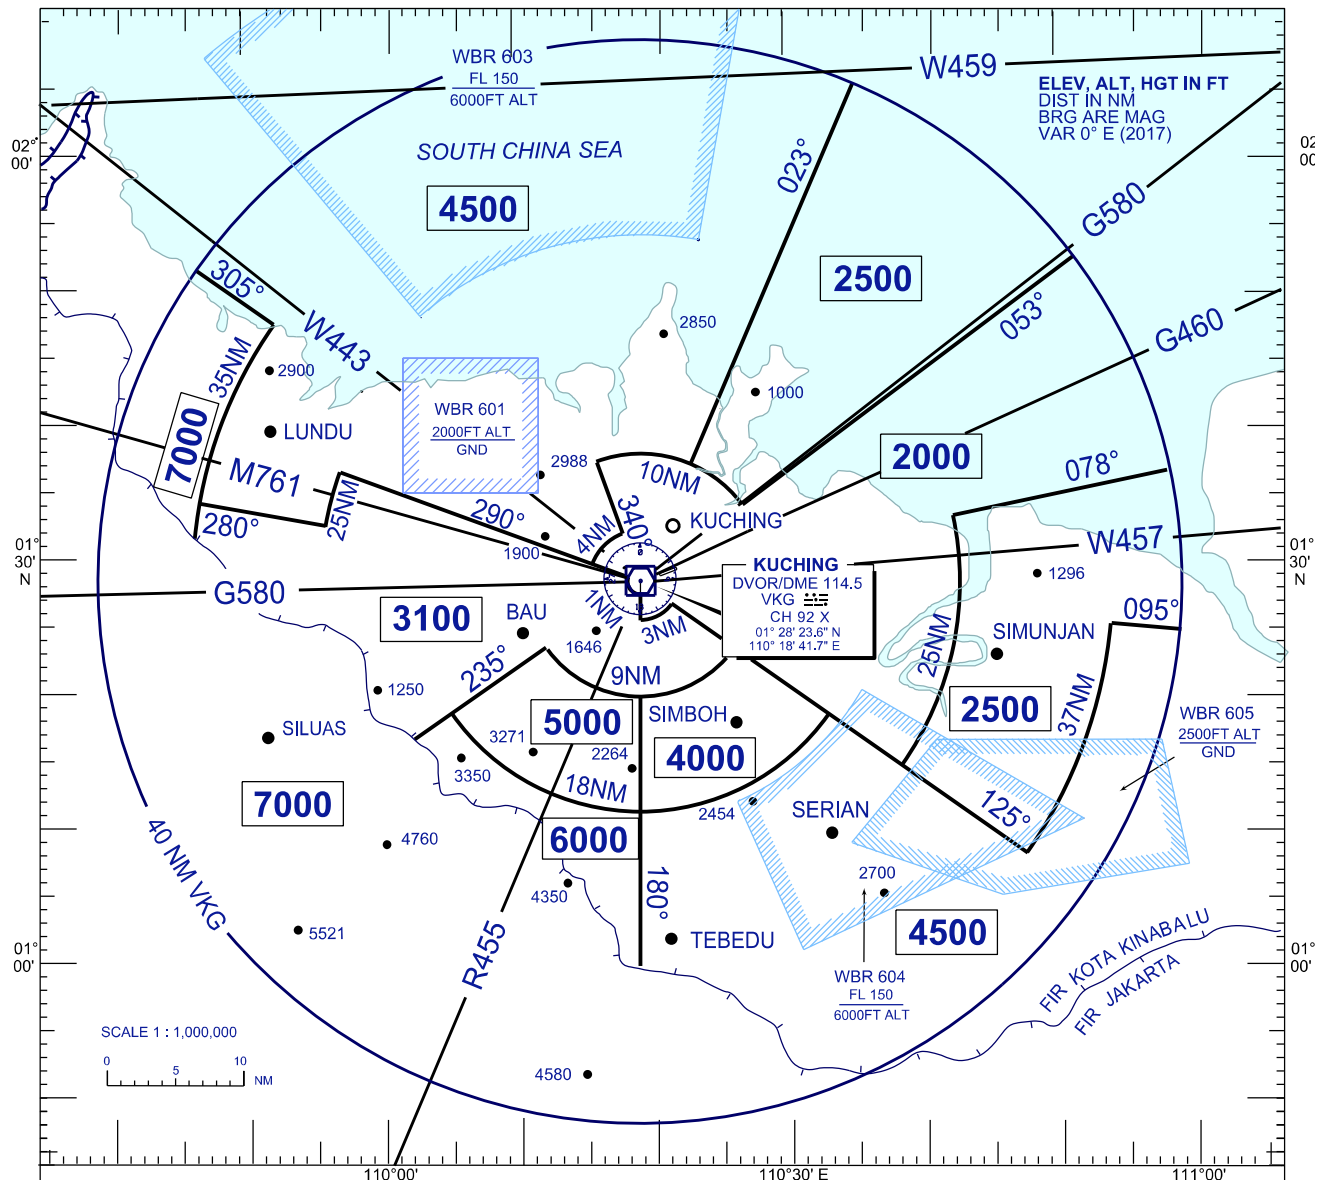


**ATC SURVEILLANCE MINIMUM
ALTITUDE CHART - ICAO**
**AERODROME ELEV 88 FT
TRANSITION ALT 11000 FT**
**APP 120.0 (P)
123.85 (S)**
KUCHING/KUCHING (WBGG)

LOSS OF RADIO COMMUNICATION PROCEDURES :
NOTES :

1. SET TRANSPONDER TO 7600
2. (a) IN VMC
CONTINUE APPROACH VISUALLY FOR THE DUTY RUNWAY
AND LAND ; OR
- (b) IN IMC
MAINTAIN LAST ASSIGNED ALTITUDE ; OR CLIMB TO
4500 FT IF THE LAST ASSIGNED ALTITUDE IS BELOW
4500FT AND TRACK DIRECT FOR VKG
3. ONCE AT THE HOLDING FACILITY VKG CARRY OUT THE STANDARD
RADIO COMMUNICATION FAILURE PROCEDURES.

THE RVA COMPRISES AN AREA 40NM RADIUS OF VKG VOR/DME
STATION. ALL BEARINGS ARE MAGNETIC AND TAKEN FROM VKG ONLY
SIGNIFICANT OBSTRUCTIONS AND SPOT HEIGHTS ARE SHOWN.THESE
ARE BASED ON QNH

ALTITUDES SHOWN ARE AT THE MINIMUM 1000FT SAFE USEABLE
ALTITUDES AND PROVIDE AT LEAST VERTICAL CLEARANCE ABOVE THE
HIGHEST OBSTACLE WITHIN 5NM OF THE AIRCRAFT'S POSITION.

CHANGES : AMEND FREQUENCY VALUE FOR APP.