


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 43 FT
HEIGHTS RELATED TO
THR RWY 26 - ELEV 20 FT

SMC	121.9
TWR	122.05
APP	123.2
ATIS	128.2

SANDAKAN/SANDAKAN
(WBKS)

RNP Z RWY 26 (AR)

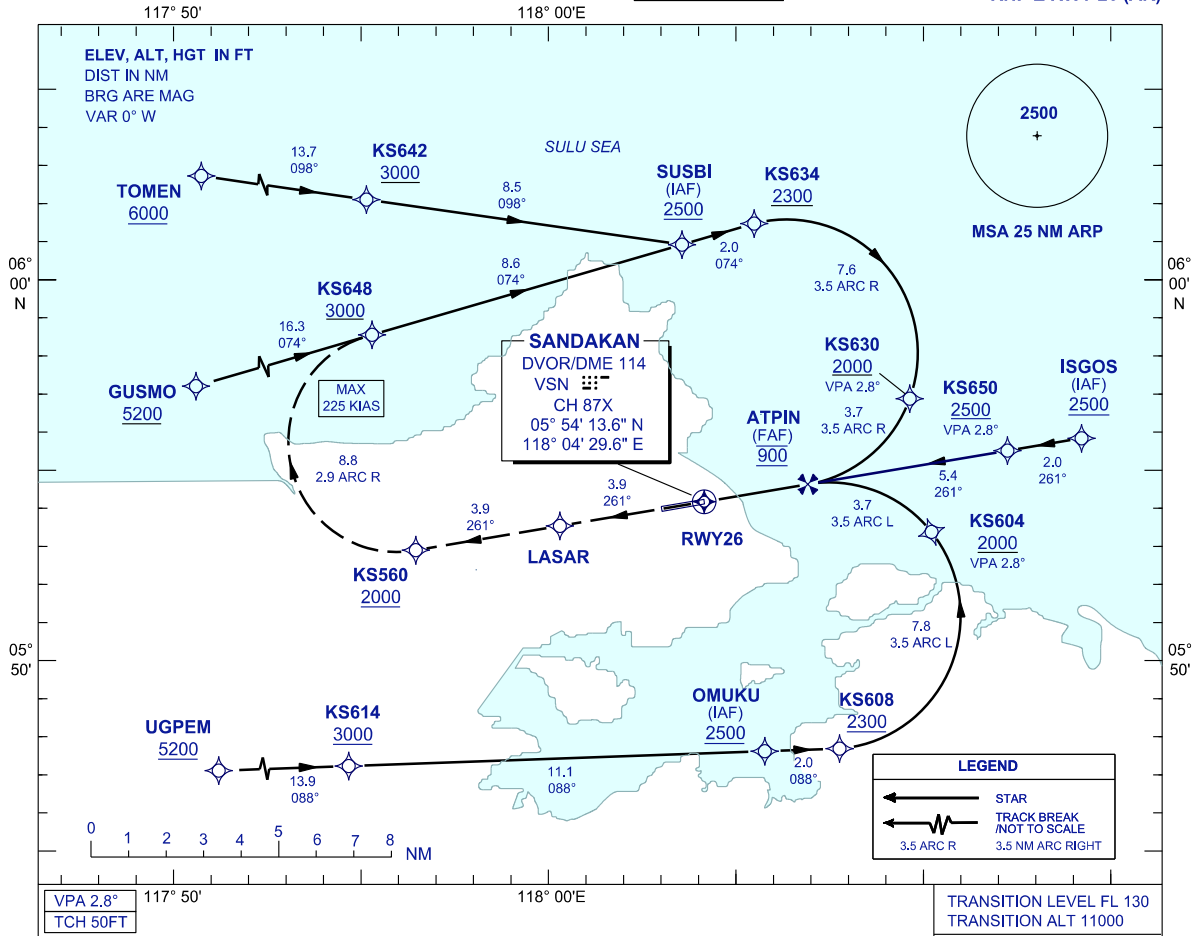

OCA/H			GROUND SPEED - KT						
ACFT CAT.	C	D	70	90	100	120	140	160	
RNP 0.3	465 (445) / 2.1 KM		RATE OF DESCENT (2.8°) (FT/MIN)						
			347	446	495	594	693	792	
			DISTANCE TO THRESHOLD (NM)						
			ALTITUDE (FT)						
			2.8	2	1				
	900	670	370						

1. AUTHORIZATION REQUIRED
2. DUAL GNSS REQUIRED
3. RF REQUIRED
4. APPROACH NOT AUTHORIZED WHEN AIRPORT TEMPERATURE BELOW 18°C OR ABOVE 40°C
5. WBKS ALTIMETER SETTING REQUIRED.
6. PAPI AND VERTICAL PATH ANGLE NOT COINCIDENT
7. PROCEDURE REQUIRES RNP 0.3 FROM IAFs TO LASAR
8. TOGA TO NAV REQUIRED
9. PROCEDURE REQUIRES RNP 1.0 IN FEEDER SEGMENTS
10. CLIMB GRADIENT OF 3.7% TO 2000FT REQUIRED TO REACH KS560

CHANGES : AMEND TCH VALUE 51FT TO READ AS 50 FT AT PROFILE VIEW.