


AERODROME/HELIPORT
CHART - ICAO

05°54'03"N
118°03'41"E
ELEV 13 M


TWR	122.05
	121.5
SMC	121.9
ATIS	128.2
APP	123.2

SANDAKAN/
SANDAKAN AIRPORT

RWY	DIRECTION	THR	BEARING STRENGTH
08	080°	05° 53' 57.15" N 118° 02' 48.95" E	574 / F / C / W / U - 367 M ASPHALT (FLEXIBLE)
			524 / F / B / W / U - 1983 M ASPHALT (FLEXIBLE)
			685 / R / C / W / U - 150 M CONCRETE (RIGID)
26	260°	05° 54' 10.24" N 118° 04' 09.00" E	685 / R / C / W / U - 150 M CONCRETE (RIGID)
			524 / F / B / W / U - 1983 M ASPHALT (FLEXIBLE)
			574 / F / C / W / U - 367 M ASPHALT (FLEXIBLE)



ANNUAL RATE OF CHANGE -0° 5' 11" W
ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

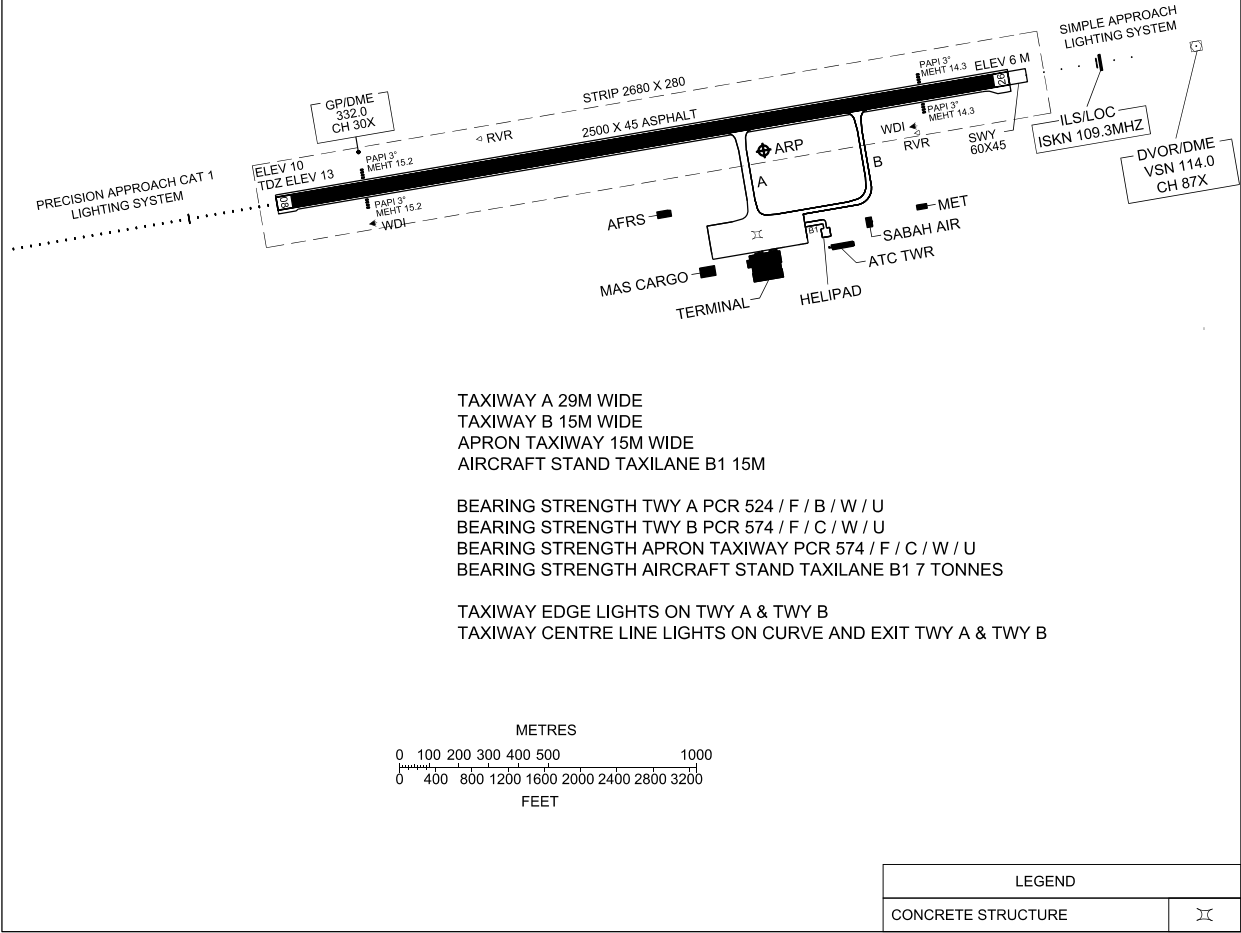

TAXIWAY A 29M WIDE
TAXIWAY B 15M WIDE
APRON TAXIWAY 15M WIDE
AIRCRAFT STAND TAXILANE B1 15M

BEARING STRENGTH TWY A PCR 524 / F / B / W / U
BEARING STRENGTH TWY B PCR 574 / F / C / W / U
BEARING STRENGTH APRON TAXIWAY PCR 574 / F / C / W / U
BEARING STRENGTH AIRCRAFT STAND TAXILANE B1 7 TONNES

TAXIWAY EDGE LIGHTS ON TWY A & TWY B
TAXIWAY CENTRE LINE LIGHTS ON CURVE AND EXIT TWY A & TWY B

CHANGES: THR COORDINATES