

STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO


TRANSITION ALTITUDE
11000 FT

APP	122.6 (P), 124.4 (S)
TWR	123.20
SMC	121.90
ATIS	127.65

SIBU/SIBU (WBGS)

RNAV (GNSS) RWY 13

NOLUS 1E REDUK 1E LENTU 1E
ELNAL 1E BIPIB 1E ANKUP 1E
PILAX 1E

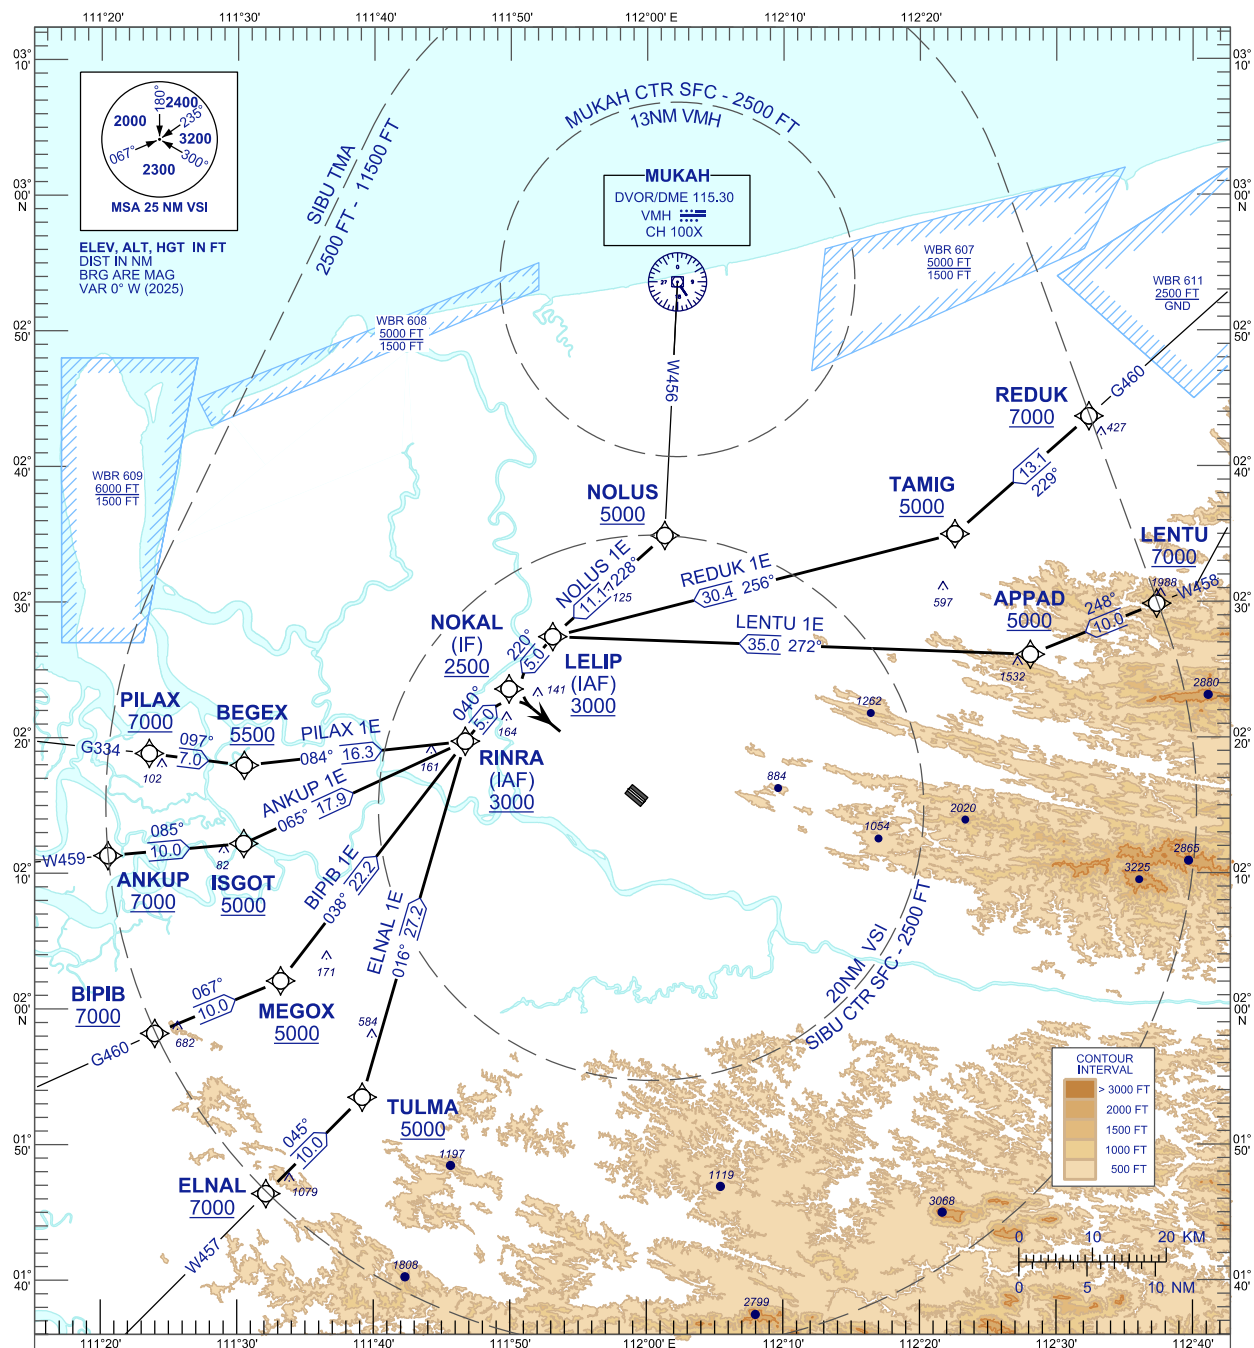

COMMUNICATION FAILURE:

* SQUAWK 7600

* IF UNDER PILOT NAVIGATION, MAINTAIN LAST ASSIGNED LEVEL FOR 3 MINUTES, IF NO ONWARD CLEARANCE IS RECEIVED SUBSEQUENTLY DESCEND TO COMPLY WITH STAR AND LAND

* IF UNDER RADAR VECTORED, MAINTAIN VECTOR FOR 1 MINUTES

* IF BELOW MSA, CLIMB TO MSA, THEN TRACK TO INTERCEPT CLEARED OR PREVIOUSLY ASSIGNED STAR AND LAND

CHANGES : MUKAH CTR VERTICAL LIMITS