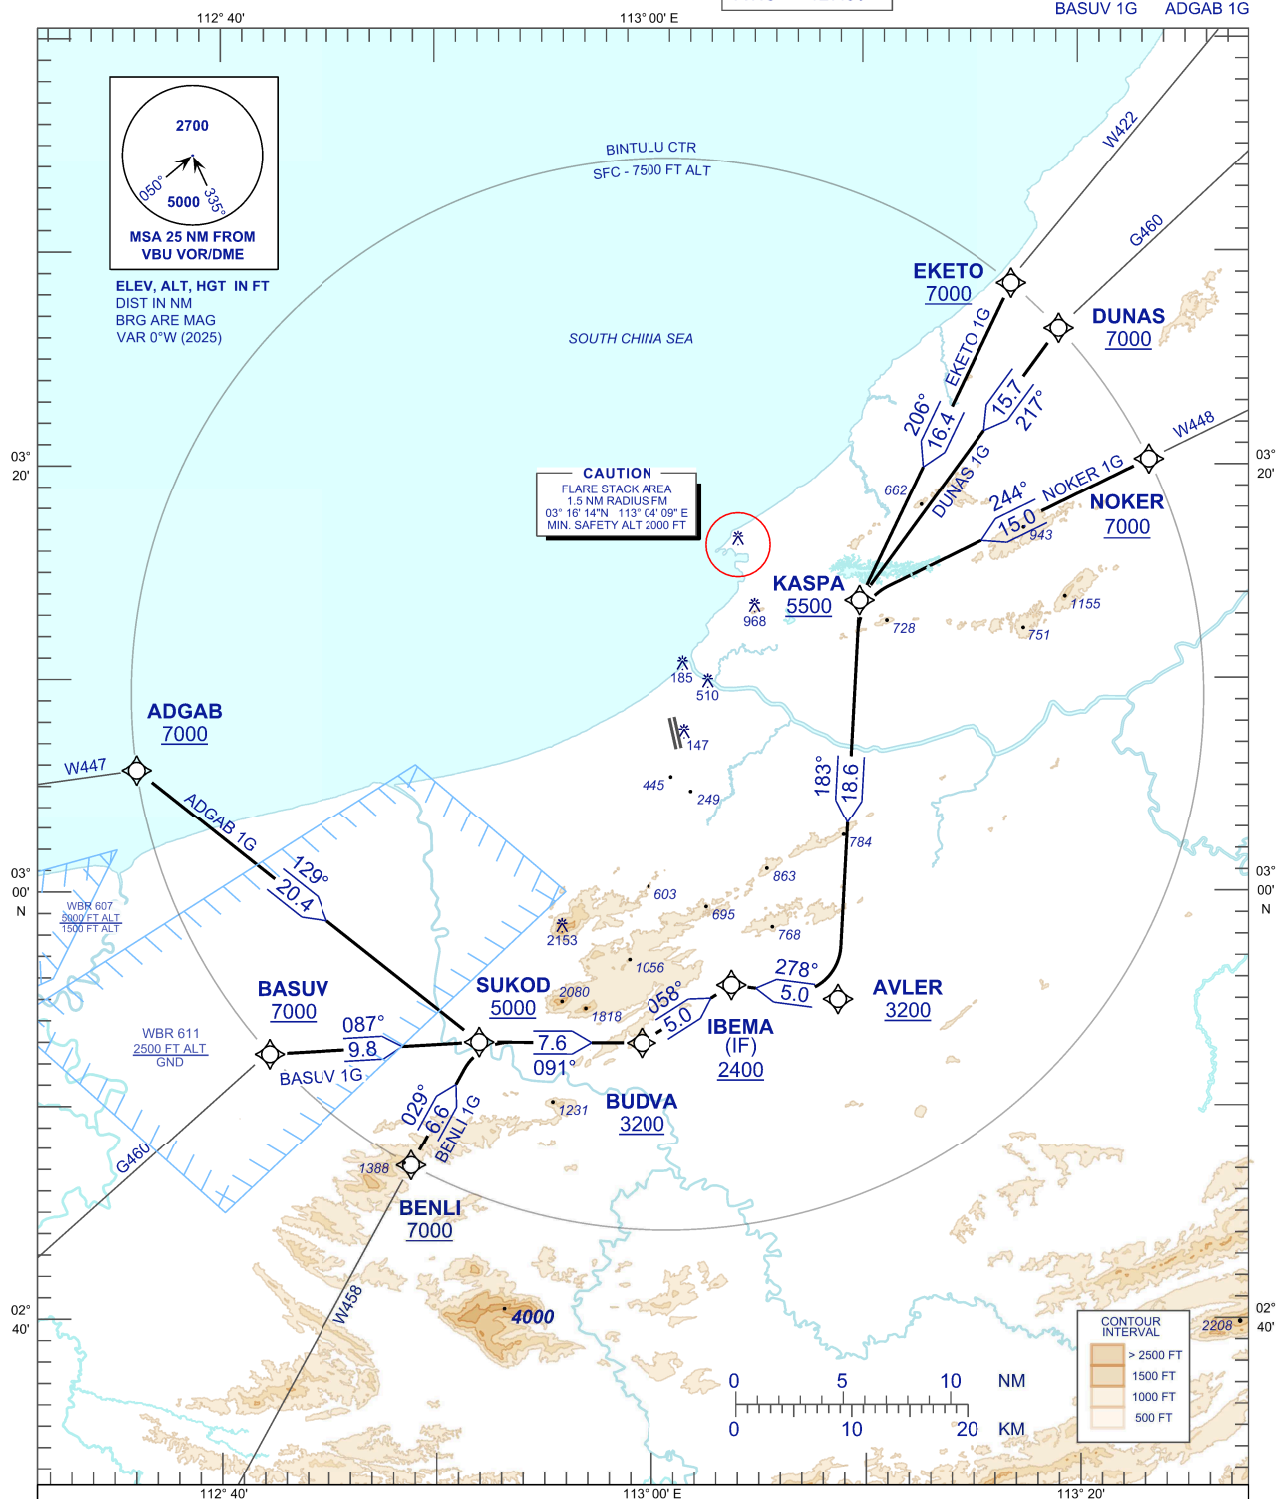


**STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**TRANSITION ALTITUDE
11000 FT

TWR	122.30 (P)
	119.25 (S)
SMC	121.80
ATIS	127.80

**BINTULU/BINTULU (WBGB)
RNAV (GNSS) RWY 35**

EKETO 1G	DUNAS 1G
NOKER 1G	BENLI 1G
BASUV 1G	ADGAB 1G

**COMMUNICATION FAILURE:**

- SET TRANSPONDER TO MODE A/C CODE 7600.
- IF UNDER PILOT NAVIGATION, MAINTAIN ASSIGNED LEVEL FOR 3 MINUTES. IF NO ONWARD CLEARANCE IS RECEIVED, SUBSEQUENTLY DESCENT TO COMPLY WITH STAR.
- IF UNDER RADAR VECTORED, MAINTAIN VECTOR FOR 1 MINUTES. IF BELOW MSA CLIMB TO MSA, THEN TRACK TO INTERCEPT CLEARED OR PREVIOUSLY ASSIGNED STAR TO LAND.

CHANGES : IBEMA (IF) 2200 TO READ AS 2400.