

AERODROME/HELIPORT CHART - ICAO 01° 29' 07" N
110° 20' 42" E ELEV 27 M


TWR 118.1 (P)	SMC 121.9
121.7 (S)	ATIS 128.4
APP 120.2 (P)	FIS 134.75
123.85 (S)	
ACC 134.5 (P)	
125.35 (S)	

KUCHING/KUCHING INTERNATIONAL AIRPORT


RWY	DIRECTION	THR	BEARING STRENGTH
07	068°	01° 28' 51.63" N 110° 20' 12.87" E	PCR 8033 / F / B / X / T ASPHALT (FLEXIBLE)
25	248°	01° 29' 36.82" N 110° 22' 06.61" E	



ANNUAL RATE OF CHANGE -0° 3' 6" W
ELEVATIONS AND DIMENSIONS
IN METRES
BEARINGS ARE MAGNETIC

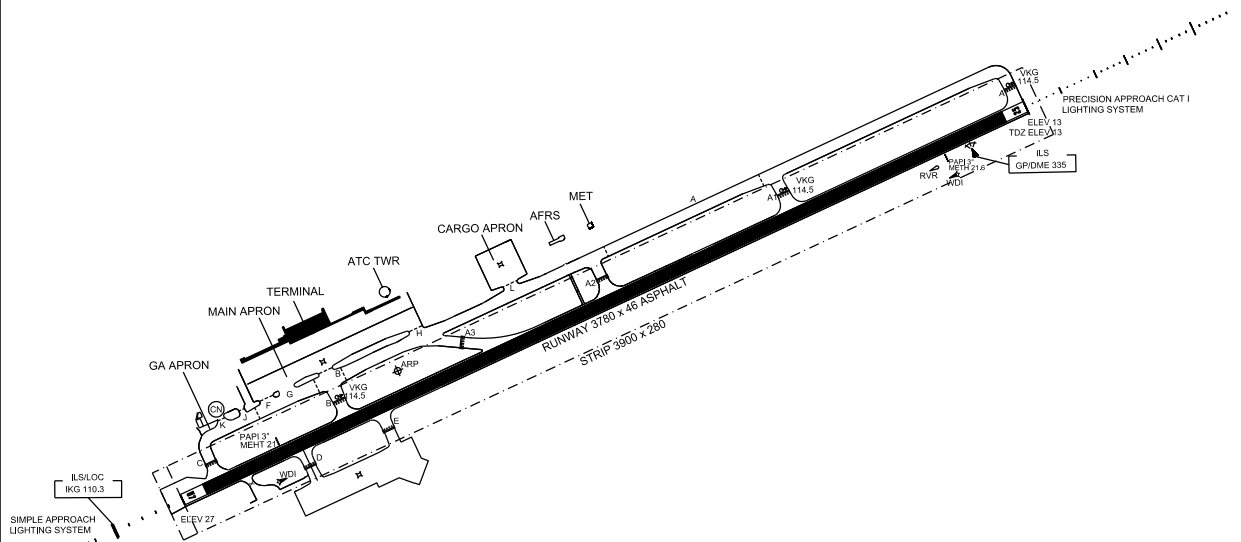

TAXIWAYS A, A1,A2, A3, B, C, D, E, F, G, H, K
AND L 23 M WIDE
TAXIWAY J 15 M WIDE
APRON TAXIWAY 23 M WIDE



LEGEND	
CONCRETE STRUCTURE	▣
VOR CHECK POINT AND FREQUENCY	⊕→ VKG 114.5

CHANGES: UPDATE PAVEMENT BEARING STRENGTH
UPDATE RUNWAY-HOLDING POSITION MARKING
UPDATE PRECISION APPROACH CAT 1 LIGHTING SYSTEM