

AERODROME/HELIPORT
CHART - ICAO

04° 18' 39" N
118° 06' 59" E
ELEV 17 M


TWR	122.50
SMC	121.9
APP	123.55
ATIS	126.25

TAWAU/
TAWAU AIRPORT

RWY	DIRECTION	THR	BEARING STRENGTH
06	58°	04° 18' 25.28" N 118° 06' 41.96" E	PCR 574 / F / C / W / U ASPHALT
24	238°	04° 19' 11.11" N 118° 07' 56.07" E	



ANNUAL RATE OF CHANGE -0° 5' 7" W DECREASING
ELEVATIONS AND DIMENSION IN METRES
BEARING ARE MAGNETIC

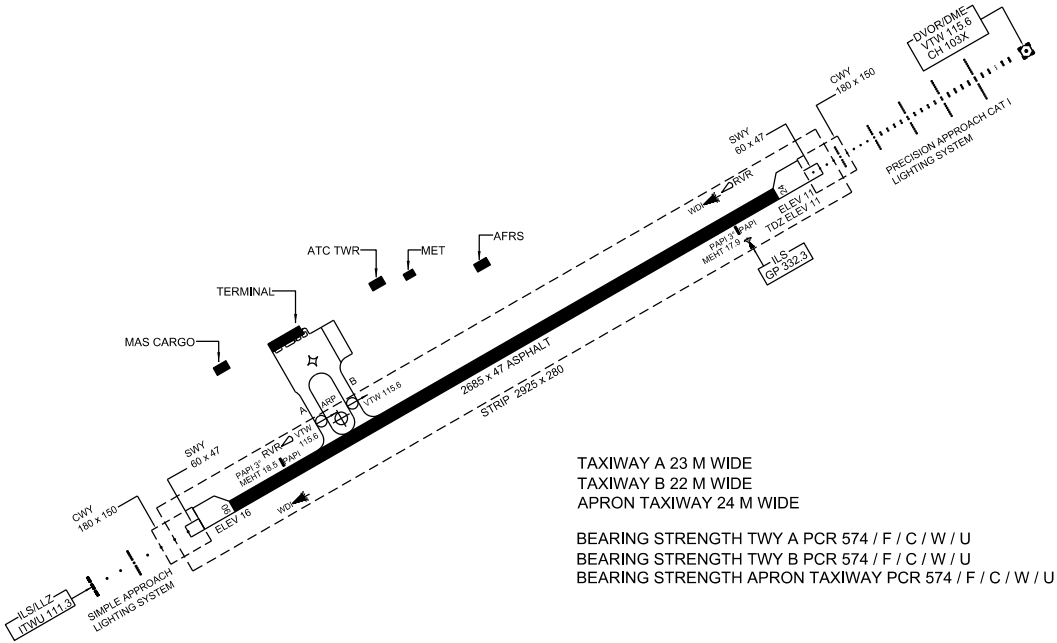

TAXIWAY A 23 M WIDE
TAXIWAY B 22 M WIDE
APRON TAXIWAY 24 M WIDE
BEARING STRENGTH TWY A PCR 574 / F / C / W / U
BEARING STRENGTH TWY B PCR 574 / F / C / W / U
BEARING STRENGTH APRON TAXIWAY PCR 574 / F / C / W / U

CHANGES: PAVEMENT BEARING STRENGTH