

AERODROME / HELIPORT
CHART - ICAO

05° 54' 03" N
118° 03' 41" E
ELEV 14 m


TWR	122.05
	121.5
SMC	121.9
ATIS	128.2
APP	123.2

SANDAKAN /
SANDAKAN AIRPORT

RWY	DIRECTION	THR	BEARING STRENGTH
08	080°	05° 53' 57.12" N 118° 02' 48.78" E	2950 / F / C / X / T - 2350 m ASPHALT (FLEXIBLE) 1030 / R / B / W / T - 150 m CONCRETE (RIGID)
26	260°	05° 54' 10.24" N 118° 04' 09.00" E	1030 / R / B / W / T - 150 m CONCRETE (RIGID) 2950 / F / C / X / T - 2350 m ASPHALT (FLEXIBLE)




ANNUAL RATE OF CHANGE -0° 1' 48" W
BEARINGS ARE MAGNETIC
ELEVATIONS AND DIMENSIONS IN METRES

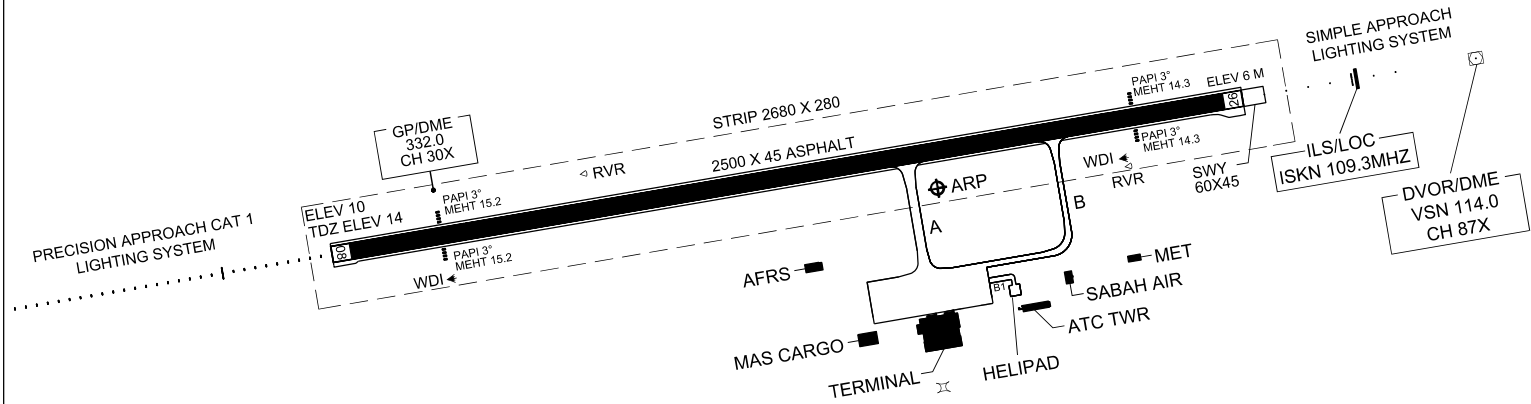

TAXIWAY A 29 m WIDE
TAXIWAY B 15 m WIDE
APRON TAXIWAY 15 m WIDE
AIRCRAFT STAND TAXILANE B1 15 m

BEARING STRENGTH TWY A PCR 740 / F / C / X / T
BEARING STRENGTH TWY B PCR 730 / F / C / X / T
BEARING STRENGTH APRON TAXIWAY PCR 730 / F / C / X / T
BEARING STRENGTH AIRCRAFT STAND TAXILANE B1 PCR 260 / F / C / X / T
TAXIWAY EDGE LIGHTS ON TWY A & TWY B
TAXIWAY CENTRE LINE LIGHTS ON CURVE AND EXIT TWY A & TWY B



LEGEND	
CONCRETE STRUCTURE	

CHANGES : AERODROME ELEVATION
PAVEMENT BEARING STRENGTH
VAR AND ANNUAL RATE
TDZ ELEVATION
THR 08 COORDINATE