AERODROME GROUND MOVEMENT CHART - ICAO
STAGE 1 AND 1A (FM 20240801 TIL 20241231 EST)

APRON ELEV
17 M

ACD 120.45
SMC 121.9
TWR 118.2
APP 124.2, 118.65, 135.25
FIS 126.1
ATIS 127.6

SUBANG/SULTAN ABDUL AZIZ SHAH AIRPORT

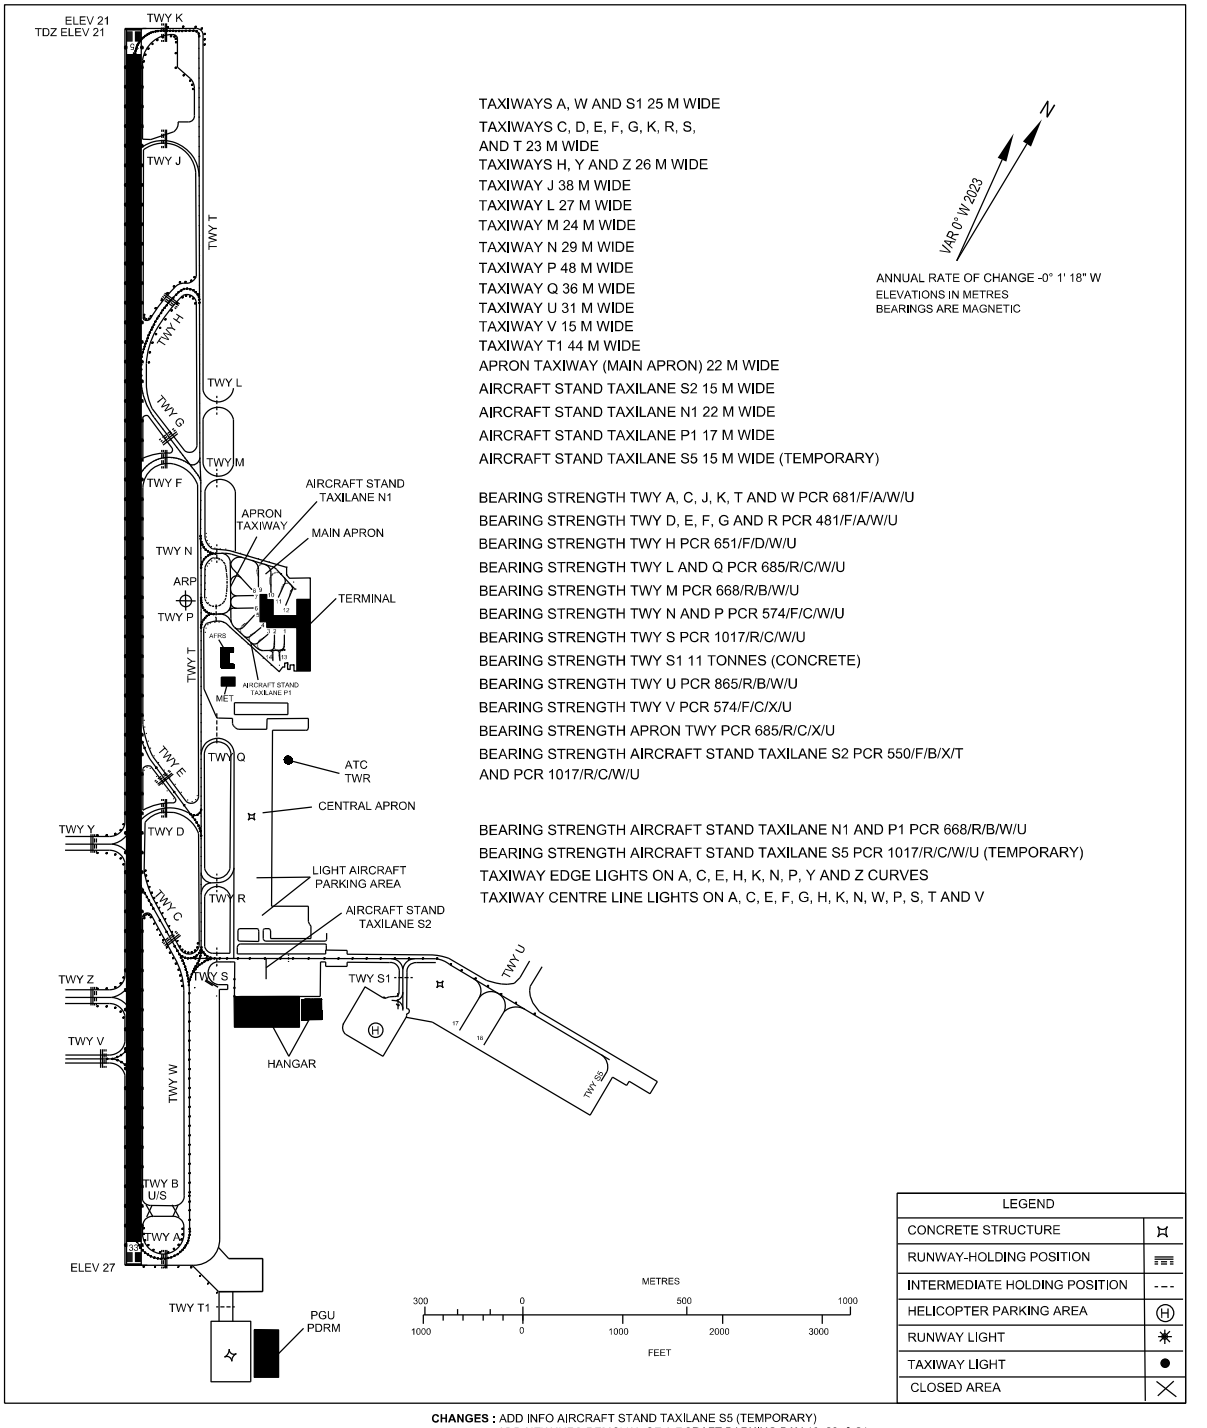

TAXIWAYS A, W AND S1 25 M WIDE
TAXIWAYS C, D, E, F, G, K, R, S, AND T 23 M WIDE
TAXIWAYS H, Y AND Z 26 M WIDE
TAXIWAY J 38 M WIDE
TAXIWAY L 27 M WIDE
TAXIWAY M 24 M WIDE
TAXIWAY N 29 M WIDE
TAXIWAY P 48 M WIDE
TAXIWAY Q 36 M WIDE
TAXIWAY U 31 M WIDE
TAXIWAY V 15 M WIDE
TAXIWAY T1 44 M WIDE
APRON TAXIWAY (MAIN APRON) 22 M WIDE
AIRCRAFT STAND TAXILANE S2 15 M WIDE
AIRCRAFT STAND TAXILANE N1 22 M WIDE
AIRCRAFT STAND TAXILANE P1 17 M WIDE
AIRCRAFT STAND TAXILANE S5 15 M WIDE (TEMPORARY)

BEARING STRENGTH TWY A, C, J, K, T AND W PCR 681/F/A/W/U
BEARING STRENGTH TWY D, E, F, G AND R PCR 481/F/A/W/U
BEARING STRENGTH TWY H PCR 651/F/D/W/U
BEARING STRENGTH TWY L AND Q PCR 685/R/C/W/U
BEARING STRENGTH TWY M PCR 668/R/B/W/U
BEARING STRENGTH TWY N AND P PCR 574/F/C/W/U
BEARING STRENGTH TWY S PCR 1017/R/C/W/U
BEARING STRENGTH TWY S1 11 TONNES (CONCRETE)
BEARING STRENGTH TWY U PCR 865/R/B/W/U
BEARING STRENGTH TWY V PCR 574/F/C/X/U
BEARING STRENGTH APRON TWY PCR 685/R/C/X/U
BEARING STRENGTH AIRCRAFT STAND TAXILANE S2 PCR 550/F/B/X/T AND PCR 1017/R/C/W/U

BEARING STRENGTH AIRCRAFT STAND TAXILANE N1 AND P1 PCR 668/R/B/W/U
BEARING STRENGTH AIRCRAFT STAND TAXILANE S5 PCR 1017/R/C/W/U (TEMPORARY)
TAXIWAY EDGE LIGHTS ON A, C, E, H, K, N, P, Y AND Z CURVES
TAXIWAY CENTRE LINE LIGHTS ON A, C, E, F, G, H, K, N, W, P, S, T AND V

CHANGES : ADD INFO AIRCRAFT STAND TAXILANE S5 (TEMPORARY)
ADD NEW INFO REMOVAL OF AIRCRAFT PARKING BAY 19, 20, & 21