


**AIRCRAFT PARKING/
DOCKING CHART - ICAO**

APRON ELEV
5 M

TWR	122.30
SMC	121.60
ATIS	128.65
TRAINING	129.10

**ALOR SETAR/SULTAN
ABDUL HALIM AIRPORT**

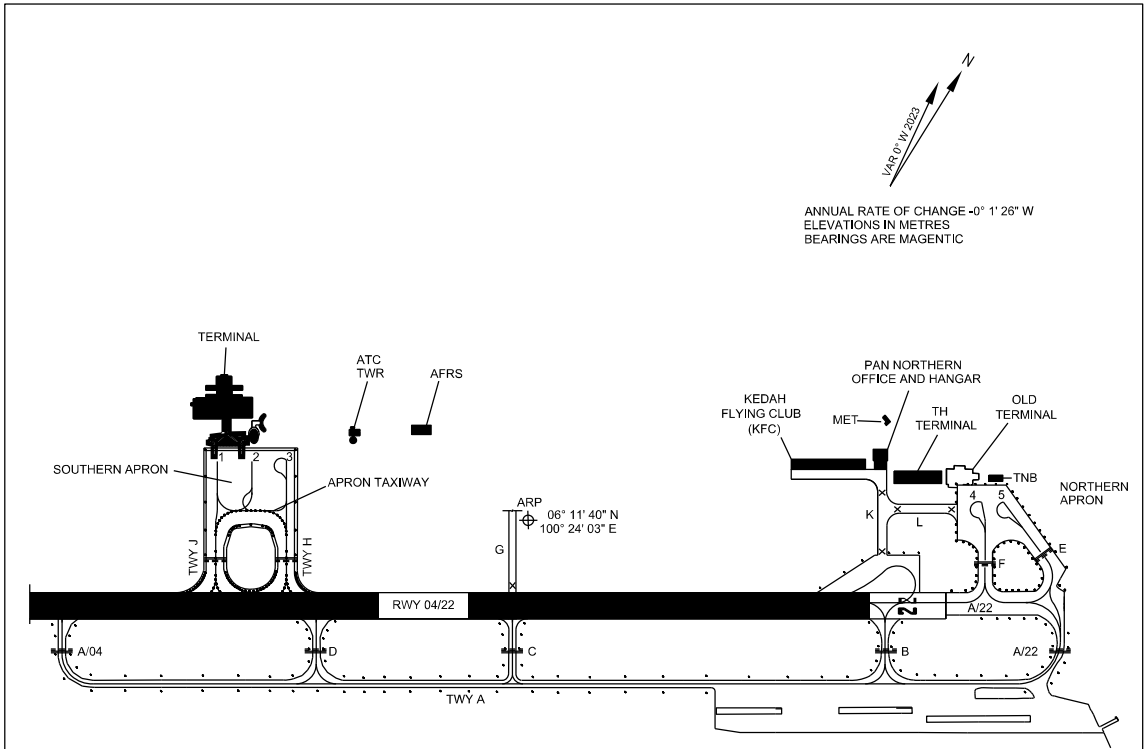

ANNUAL RATE OF CHANGE -0° 1' 26\" W
ELEVATIONS IN METRES
BEARINGS ARE MAGNETIC

TAXIWAYS A, B, C AND D 15 M WIDE
TAXIWAYS E, F, H AND J 23 M WIDE
APRON TAXIWAY (SOUTHERN APRON) 23 M WIDE

BEARING STRENGTH TWY A, A/04, B, C AND D 2700 kg / no pressure limit
BEARING STRENGTH TWY A/22 PCR 448/F/C/W/U AND PCR 539/R/C/W/U
BEARING STRENGTH TWY E AND F PCR 517/R/C/W/U
BEARING STRENGTH TWY H AND J PCR 654/F/C/X/U


BEARING STRENGTH APRON TAXIWAY (SOUTHERN APRON) PCR 801/R/C/X/U

TAXIWAY EDGE LIGHTS ON A, B, C, D, E, F, H AND J
TAXIWAY CENTRELINE LIGHTS ON H AND J

AIRCRAFT STANDS 1 AND 2 APGS EQUIPPED

AIRCRAFT PARKING / DOCKING STAND POSITION

INS COORDINATES FOR AIRCRAFT STANDS	SURFACE & STRENGTH	AIRCRAFT TYPE
SOUTHERN APRON		
1 06° 11' 27.73\" N 100° 23' 45.48\" E	PCR 517/R/C/X/U	B738, A320, A21N
2 06° 11' 29.36\" N 100° 23' 46.96\" E	PCR 801/R/C/X/U	A333, B738, A320, A21N
3 06° 11' 30.79\" N 100° 23' 48.45\" E	PCR 150/R/C/X/U	AT75, AT76
NORTHERN APRON		
4 06° 12' 03.64\" N 100° 24' 22.42\" E	PCR 539/R/C/W/U	B738
5 06° 12' 04.64\" N 100° 24' 23.90\" E	PCR 539/R/C/W/U	B738



LEGEND	
AIRCRAFT STAND	5
TAXIWAY LIGHT	•
RUNWAY-HOLDING POSITION	■
CLOSED MARKING	X

CHANGES : PAVEMENT BEARING STRENGTH