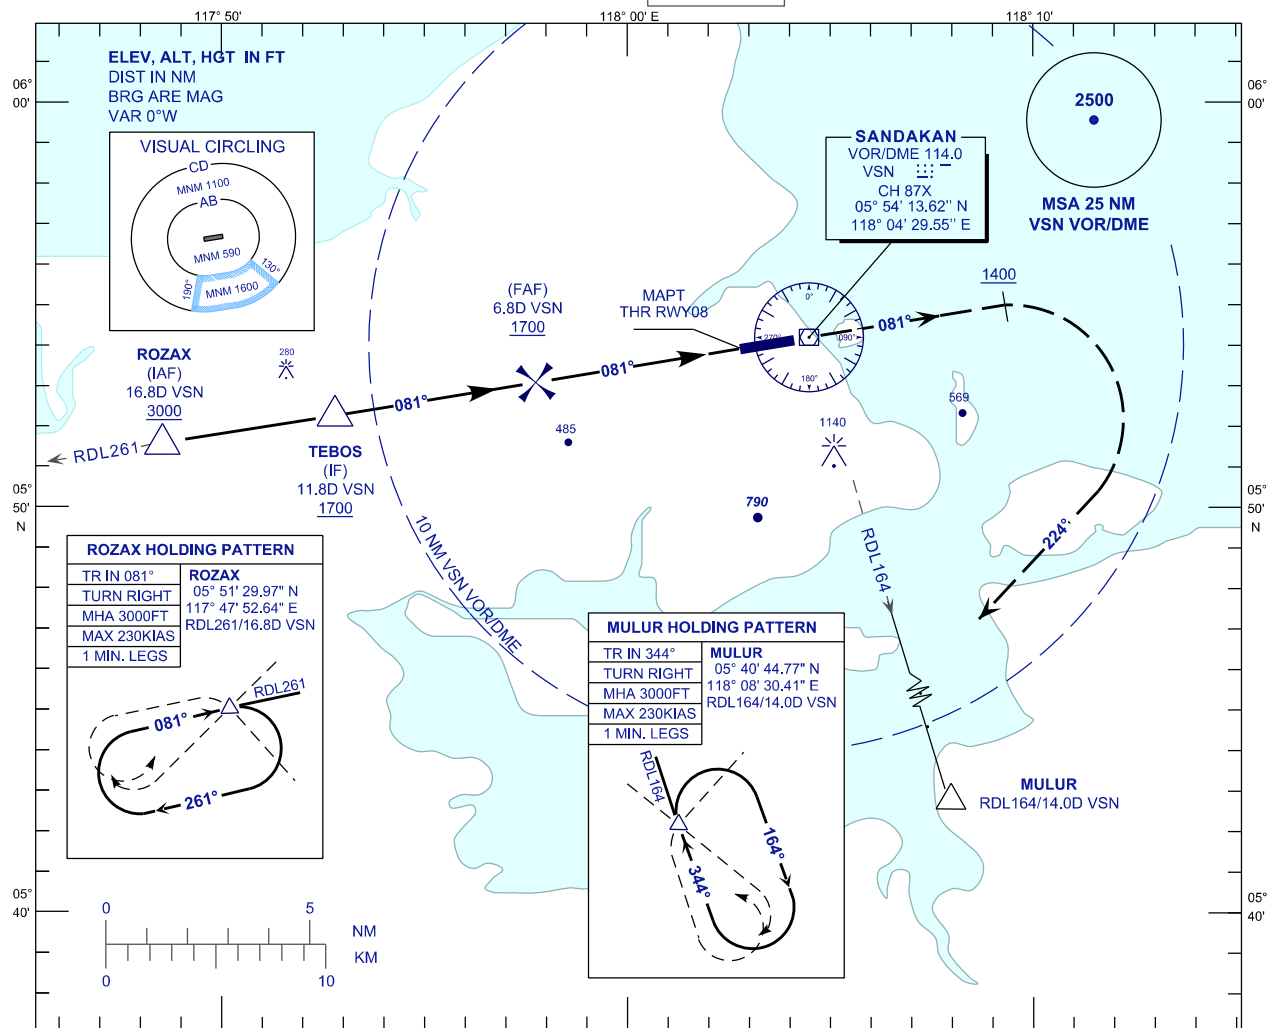


**INSTRUMENT
APPROACH
CHART - ICAO**

 AERODROME ELEV 43FT
 HEIGHT RELATED TO
 THR RWY 08 - ELEV 32FT


 APP 123.20
 TWR 122.05
 SMC 121.90
 ATIS 128.20

**SANDAKAN/SANDAKAN (WBKS)
VOR/DME Z RWY 08**


TRANSITION ALT 11000

MISSED APPROACH

CLIMB TO 3000FT ON TR 081°, ON PASSING 1400FT TURN RIGHT TR 224° TO INTERCEPT RDL164 OUTBOUND TO MULUR AND HOLD, OR AS DIRECTED BY ATC.

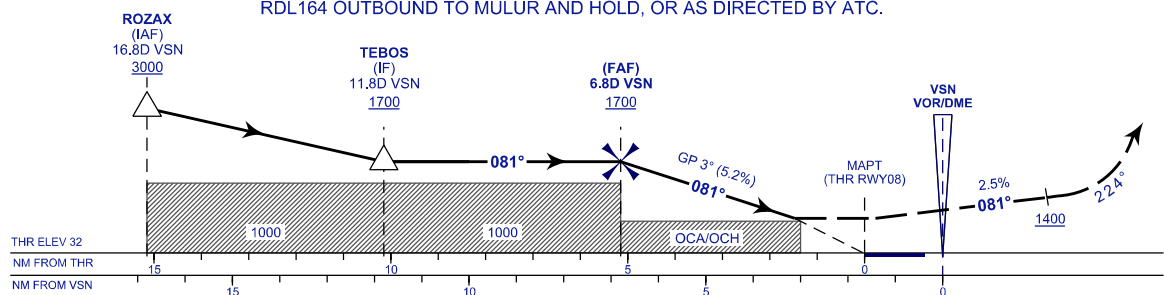

OCA(H)	A	B	C	D
STRAIGHT-IN APP	580 (548)			
CIRCLING	590		1600* / 1100	
NOTE*: CIRCLING MNM IN THE SHADED AREA 1600FT				

GROUND SPEED (KT)	90	120	140	160	180
FAF - RWY08 (5.1NM) MIN : SEC	3:23	2:32	2:11	1:54	1:42
RATE OF DESCEND 5.2% (FT/MIN)	480	640	740	850	960
DME VSN (NM)	6.8	6.0	5.0	4.0	3.2
DIST THR RWY08 (NM)	5.1	4.1	3.1	2.1	1.1
ALTITUDE(FT)	1700	1382	1063	743	426

 CHANGES : BASE TURN SPEED IAS 230KT TO MAX 230KIAS,
 REMOVE TCH 50FT AT PROFILE VIEW,
 VOR/DME COORDINATES.