AERODROME/HELIPORT CHART - ICAO
PHASE 3 (20260701 TIL 20270622 EST)

05° 17' 44" N
100° 16' 20" E

ELEV 3 M

TWR 121.1
SMC 121.6
121.9
ATIS 126.4

PENANG/PENANG INTERNATIONAL AIRPORT

RWY	DIRECTION	THR	BEARING STRENGTH
04	42°	05° 17' 09.41" N 100° 16' 00.14" E	PCR 787/R/A/W/U -50 M CONCRETE (RIGID) PCR 577/F/A/W/U -3304 M ASPHALT (FLEXIBLE)
22	222°	05° 18' 30.25" N 100° 17' 13.37" E	PCR 577/F/A/W/U -3304 M ASPHALT (FLEXIBLE) PCR 787/R/A/W/U -50 M CONCRETE (RIGID)

HS2 CAUTION-MULTIPLE AIRCRAFT CROSSING
HS3 AIRCRAFT CROSSING RWY TO TWY J MUST HOLD SHORT AT TWY B

ANNUAL RATE OF CHANGE -0° 1' 18"W DECREASING
ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

N
VAR 0° W (2023)

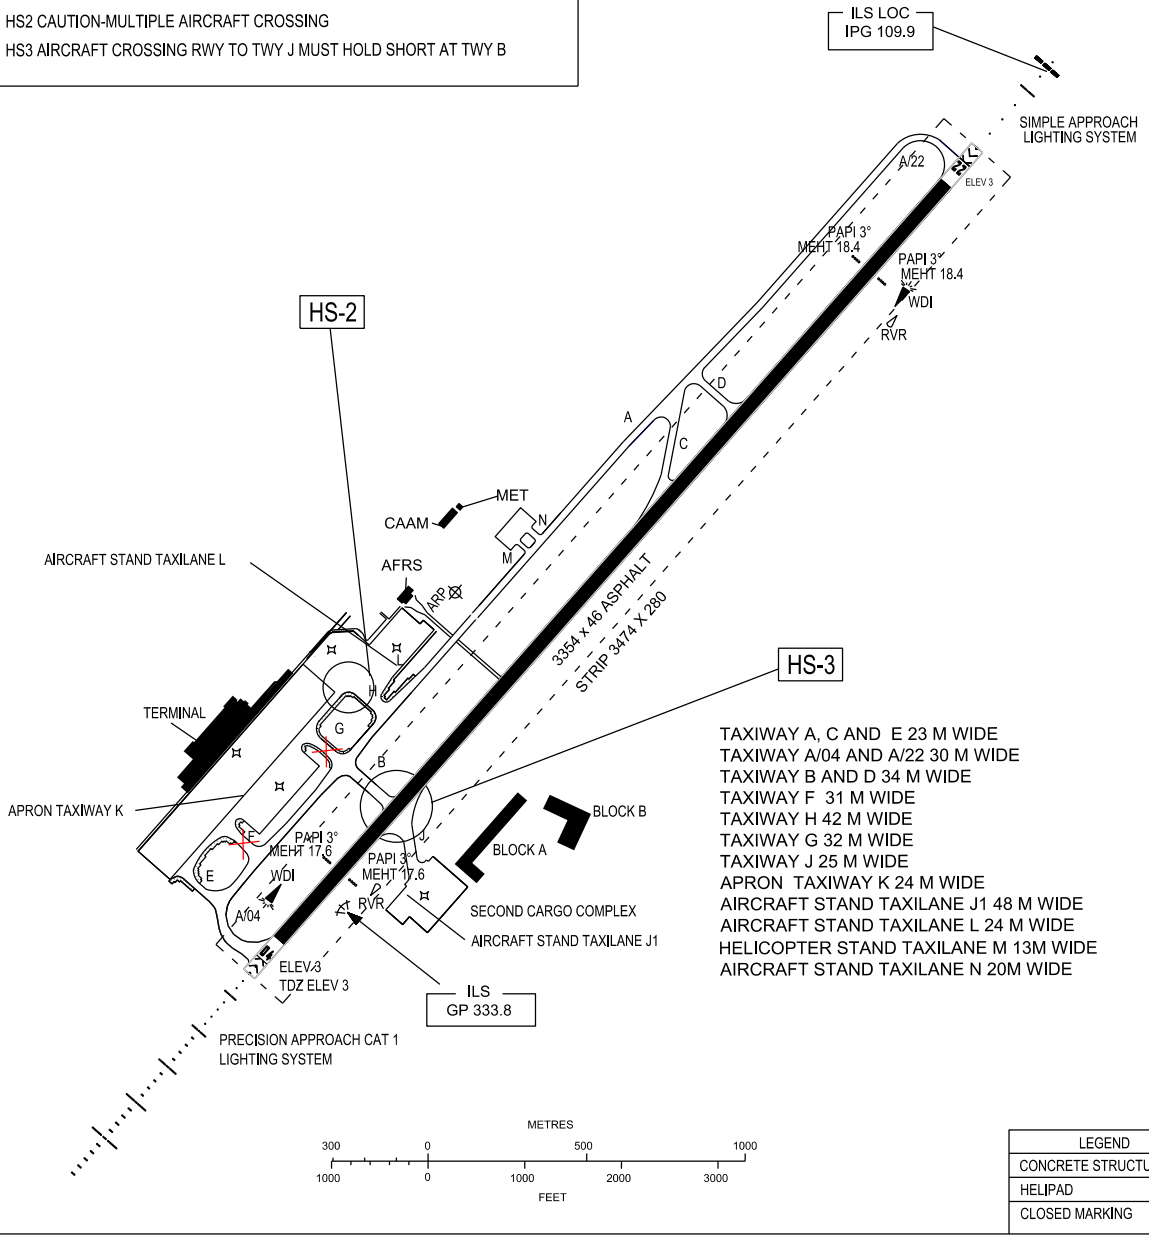

TAXIWAY A, C AND E 23 M WIDE
TAXIWAY A/04 AND A/22 30 M WIDE
TAXIWAY B AND D 34 M WIDE
TAXIWAY F 31 M WIDE
TAXIWAY H 42 M WIDE
TAXIWAY G 32 M WIDE
TAXIWAY J 25 M WIDE
APRON TAXIWAY K 24 M WIDE
AIRCRAFT STAND TAXILANE J1 48 M WIDE
AIRCRAFT STAND TAXILANE L 24 M WIDE
HELICOPTER STAND TAXILANE M 13M WIDE
AIRCRAFT STAND TAXILANE N 20M WIDE

METRES
300 0 500 1000
1000 0 1000 2000 3000
FEET

LEGEND	
CONCRETE STRUCTURE	⌗
HELIPAD	Ⓗ
CLOSED MARKING	

CHANGES: UPDATE TEMPORARY CLOSURE OF TAXIWAY F AND TAXIWAY G
UPDATE REMOVAL OF AIRCRAFT PARKING BAY NO B2,B4,B6,B7 AND B5,
UPDATE REMOVAL HS-1-CAUTION -VEHICLE CROSSING APRON TAXIWAY
UPDATE REMOVAL OF AIRCRAFT PARKING BAY NO B2,B4,B6,B7 AND B5,
UPDATE NEW HELICOPTER STAND TAXILANE M,& AIRCRAFT STAND TAXILANE N
UPDATE TEMPORARY CLOSURE OF BAY A6,A6L,A6R,A5,A4L,A4,A4R,A3,A2,A1R,A1,A1L,B1 AND B3,