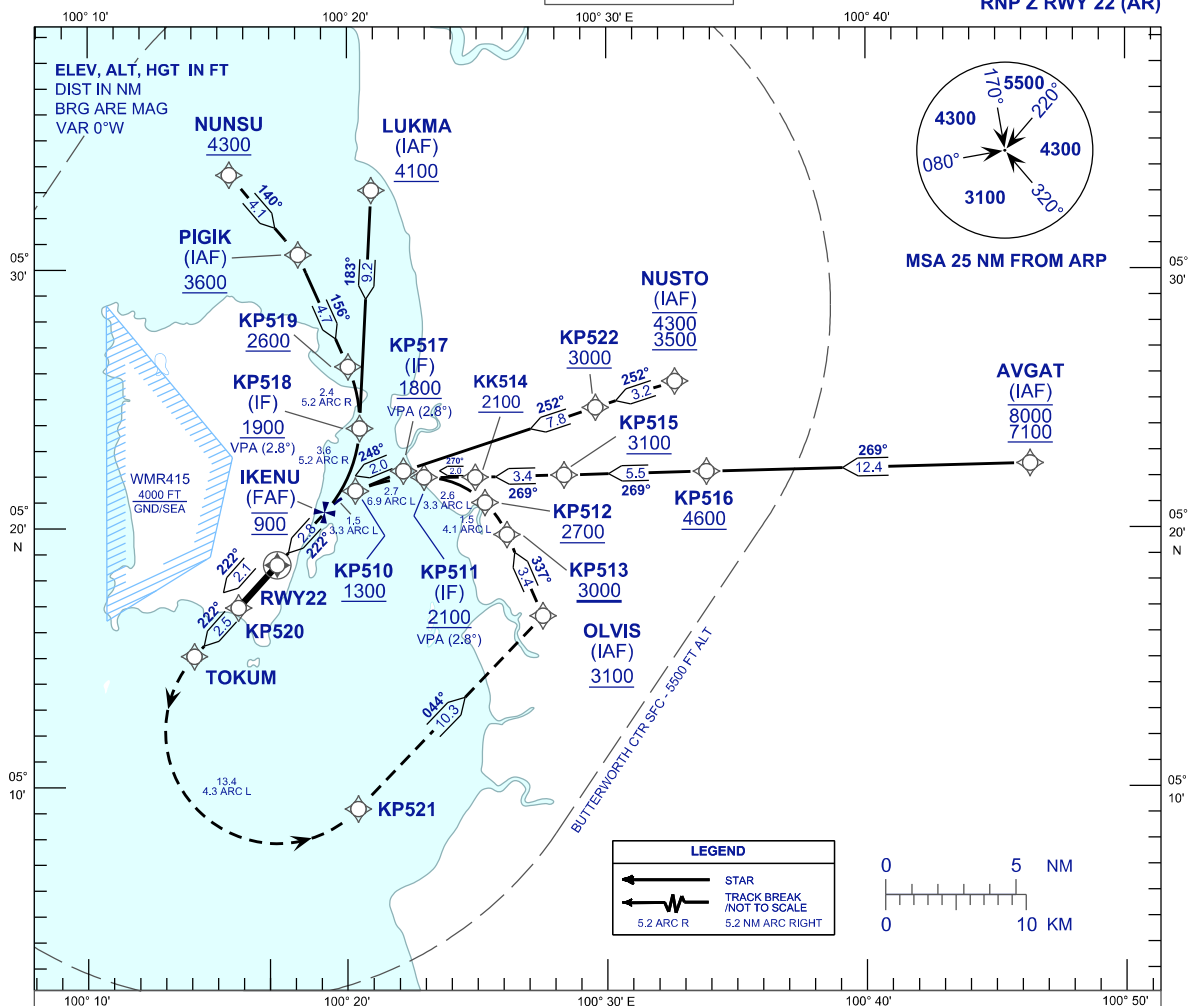



**INSTRUMENT
APPROACH
CHART - ICAO**
AERODROME ELEV 10 FT
 HEIGHT RELATED TO
 THR RWY 22 - ELEV 10 FT

 APP 125.925
 TWR 121.10
 SMC 121.60, 121.90
 ATIS 126.40

**PENANG/PENANG
INTERNATIONAL AIRPORT (WMKP)**
RNP Z RWY 22 (AR)

 VPA 2.8°
 RDH 50FT

MISSED APPROACH

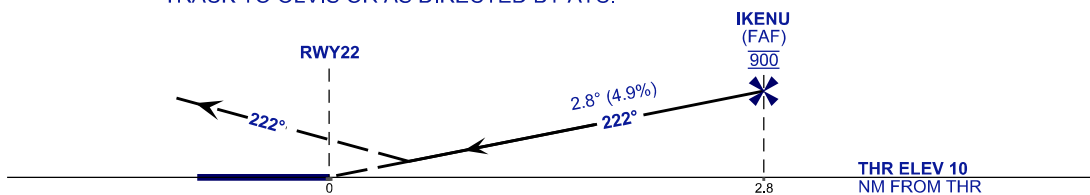 CLIMB TO 3100FT VIA THE RNP MISSED APPROACH,
 TRACK TO OLVIS OR AS DIRECTED BY ATC.

 TRANSITION LEVEL FL130
 TRANSITION ALT 11000 FT


STRAIGHT-IN APPROACH	OCA (OCH)	
CATEGORY OF AIRCRAFT	C	D
RNP (0.30)	620 (610)	
CIRCLING AND ALTERNATE	N/A	

AUTHORIZATION REQUIRED
NOTES

- 1) APPROACH NOT AUTHORIZED WHEN AIRPORT TEMPERATURE BELOW 19°C OR ABOVE 40°C.
- 2) RF REQUIRED.
- 3) WMKP ALTIMETER SETTING REQUIRED.
- 4) GNSS REQUIRED.
- 5) PAPI AND VERTICAL PATH ANGLE NOT COINCIDENT.
- 6) RNP 1.0 REQUIRED FROM NUNSU TO IAF.
- 7) RNP 0.3 REQUIRED FROM IAF'S TO FAF.
- 8) RNP 0.3 REQUIRED FROM DA TO KP520.
- 9) RNP 0.5 REQUIRED FROM KP520 TO TOKUM.
- 10) LATERAL TRANSITION TO MAP MUST NOT BE INITIATED PRIOR TO DA/H POSITION.

NEW CHART