


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 75 FT
HEIGHTS RELATED TO
THR RWY 35 - ELEV 75 FT

TWR/APP 122.3 (P)
119.25 (S)
121.5
SMC 121.8
ATIS 127.8

BINTULU/BINTULU (WBGB)


RNP Y RWY 35

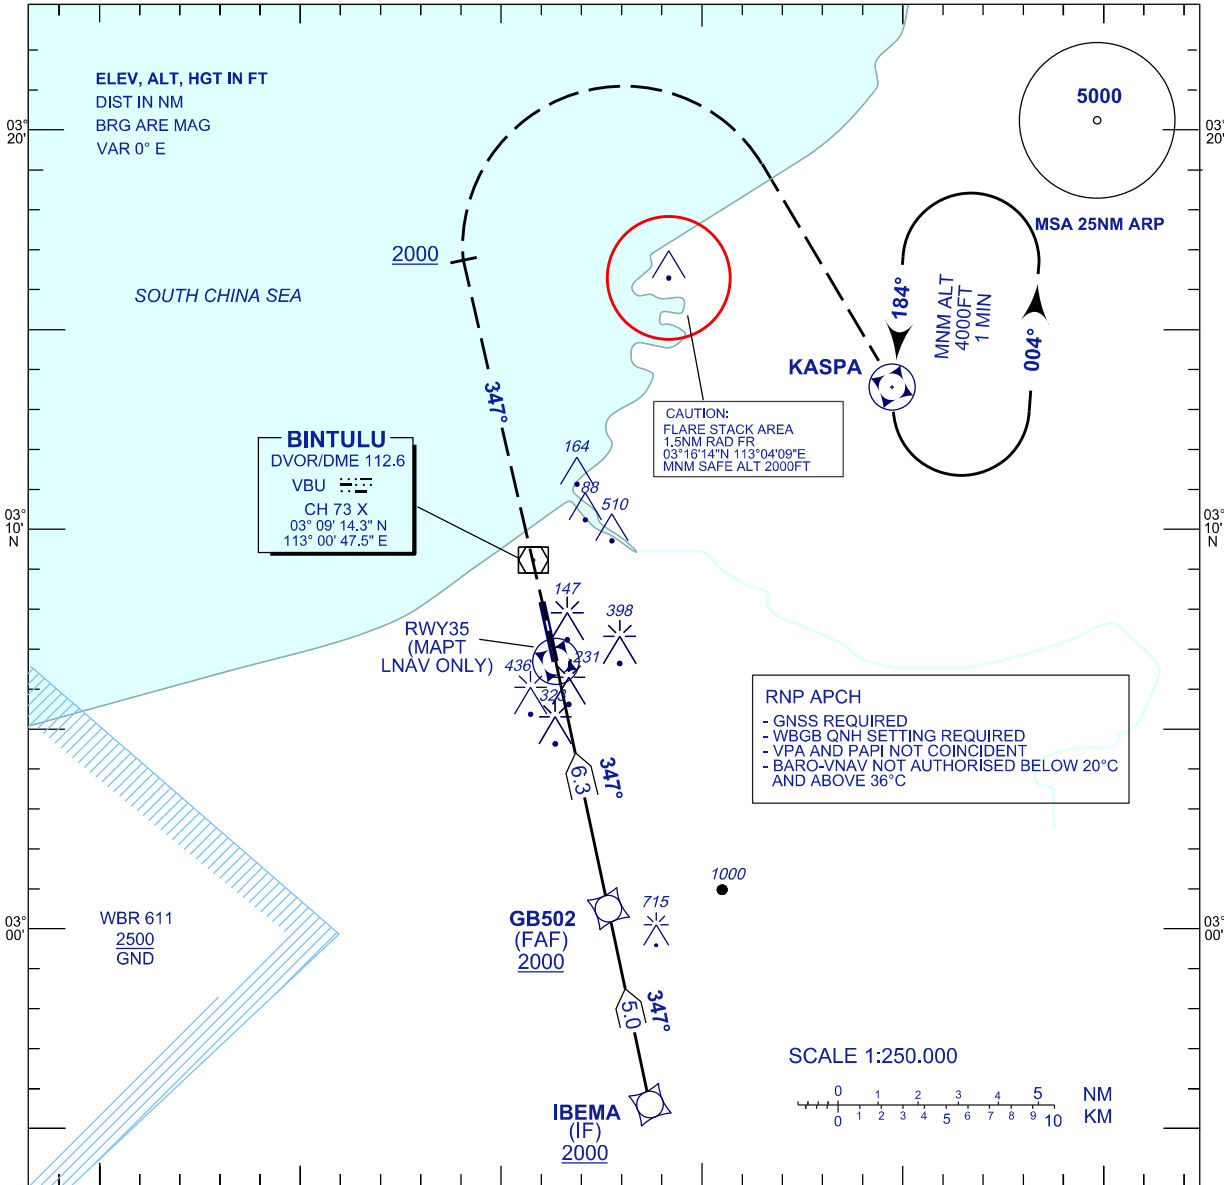


RNP APCH
- GNSS REQUIRED
- WBGB QNH SETTING REQUIRED
- VPA AND PAPI NOT COINCIDENT
- BARO-VNAV NOT AUTHORISED BELOW 20°C AND ABOVE 36°C

CAUTION:
FLARE STACK AREA
1.5NM RAD FR
03°16'14"N 113°04'09"E
MNM SAFE ALT 2000FT

BINTULU
DVOR/DME 112.6
VBU
CH 73 X
03° 09' 14.3" N
113° 00' 47.5" E



VPA 2.8°
TCH 50FT

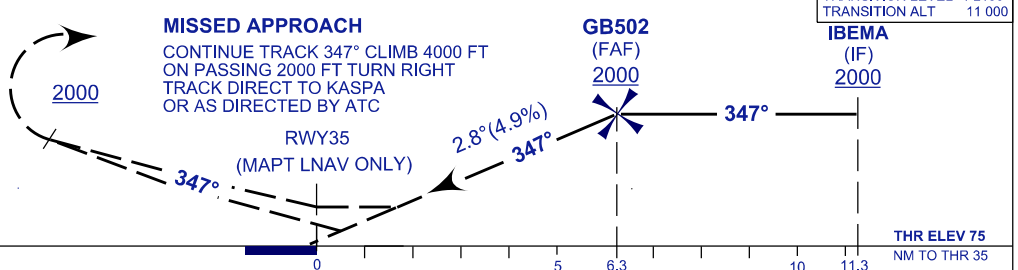

OCA (OCH)	A	B	C	D
LNAV	630 (555)			
LNAV/VNAV	566(491)	579(504)	597(522)	620(541)

DIST THR/RWY35	NM	6.3	5.0	4.0	3.0	2.0	1.8
ALTITUDE	FT	2000	1610	1310	1010	710	650

GS	KT	80	100	120	140	160	180
FAF-RWY35 (6.3NM)	MIN:SEC	4:44	3:48	3:10	2:43	2:22	2:70
RATE OF DESCEND (305FT / NM)	FT/MIN	400	500	610	710	810	910

CHANGES : CHART IDENTIFICATION, RNP APCH & ON PROFILE VIEW ADD VERTICAL PATH ANGLE ,
TRANSITION LEVEL AND CLIMB 4000FT MISSED APPROACH.