

**AERODROME/HELIPORT  
CHART - ICAO**

04° 18' 39" N  
118° 06' 59" E

ELEV 17 M


TWR	122.50
SMC	121.9
APP	123.55
ATIS	126.25

**TAWAU/  
TAWAU AIRPORT**

RWY	DIRECTION	THR	BEARING STRENGTH
06	58°	04° 18' 25.28" N 118° 06' 41.96" E	PCR 574 / F / C / W / U ASPHALT
24	238°	04° 19' 11.11" N 118° 07' 56.07" E	




ANNUAL RATE OF CHANGE -0° 5' 7" W  
DECREASING  
ELEVATIONS AND DIMENSION IN METRES  
BEARING ARE MAGNETIC

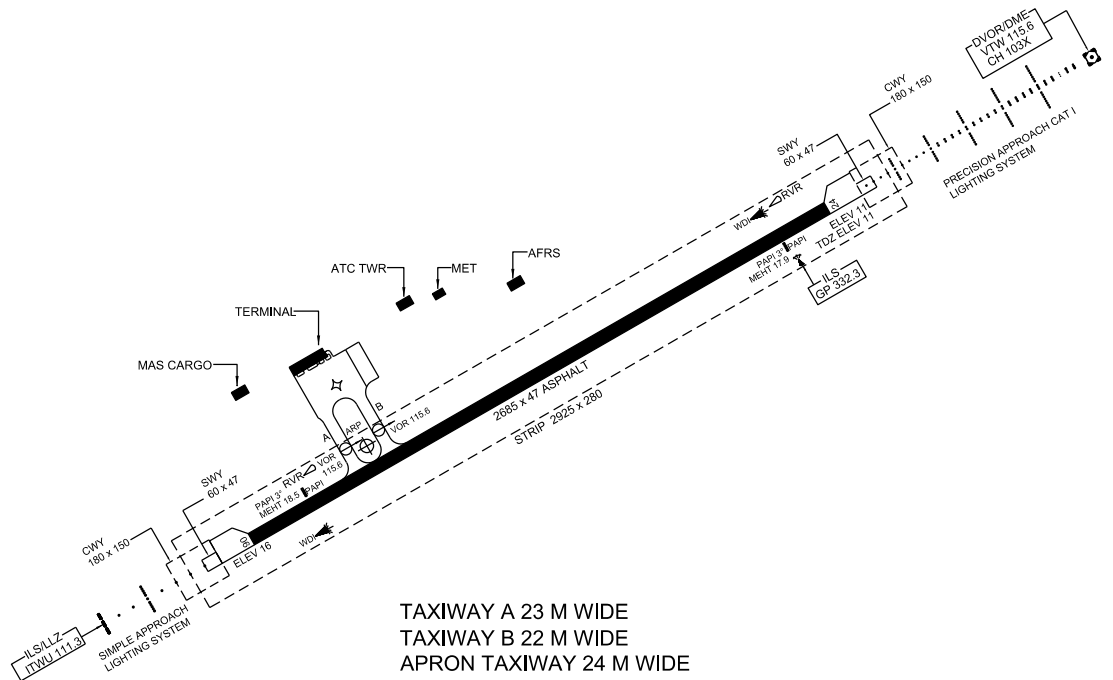

TAXIWAY A 23 M WIDE  
TAXIWAY B 22 M WIDE  
APRON TAXIWAY 24 M WIDE

BEARING STRENGTH TWY A PCR 474 / F / C / W / U  
BEARING STRENGTH TWY B PCR 574 / F / C / W / U  
BEARING STRENGTH APRON TAXIWAY PCR 574 / F / C / W / U



LEGEND	
CONCRETE STRUCTURE	
VOR CHECKPOINT AND FREQUENCY	

CHANGES: PAVEMENT BEARING STRENGTH