


**AIRCRAFT PARKING/
DOCKING CHART - ICAO**

APRON ELEV
55 M

TWR 122.1
SMC 121.6
ATIS 127.05


**IPOH/SULTAN
AZLAN SHAH AIRPORT**

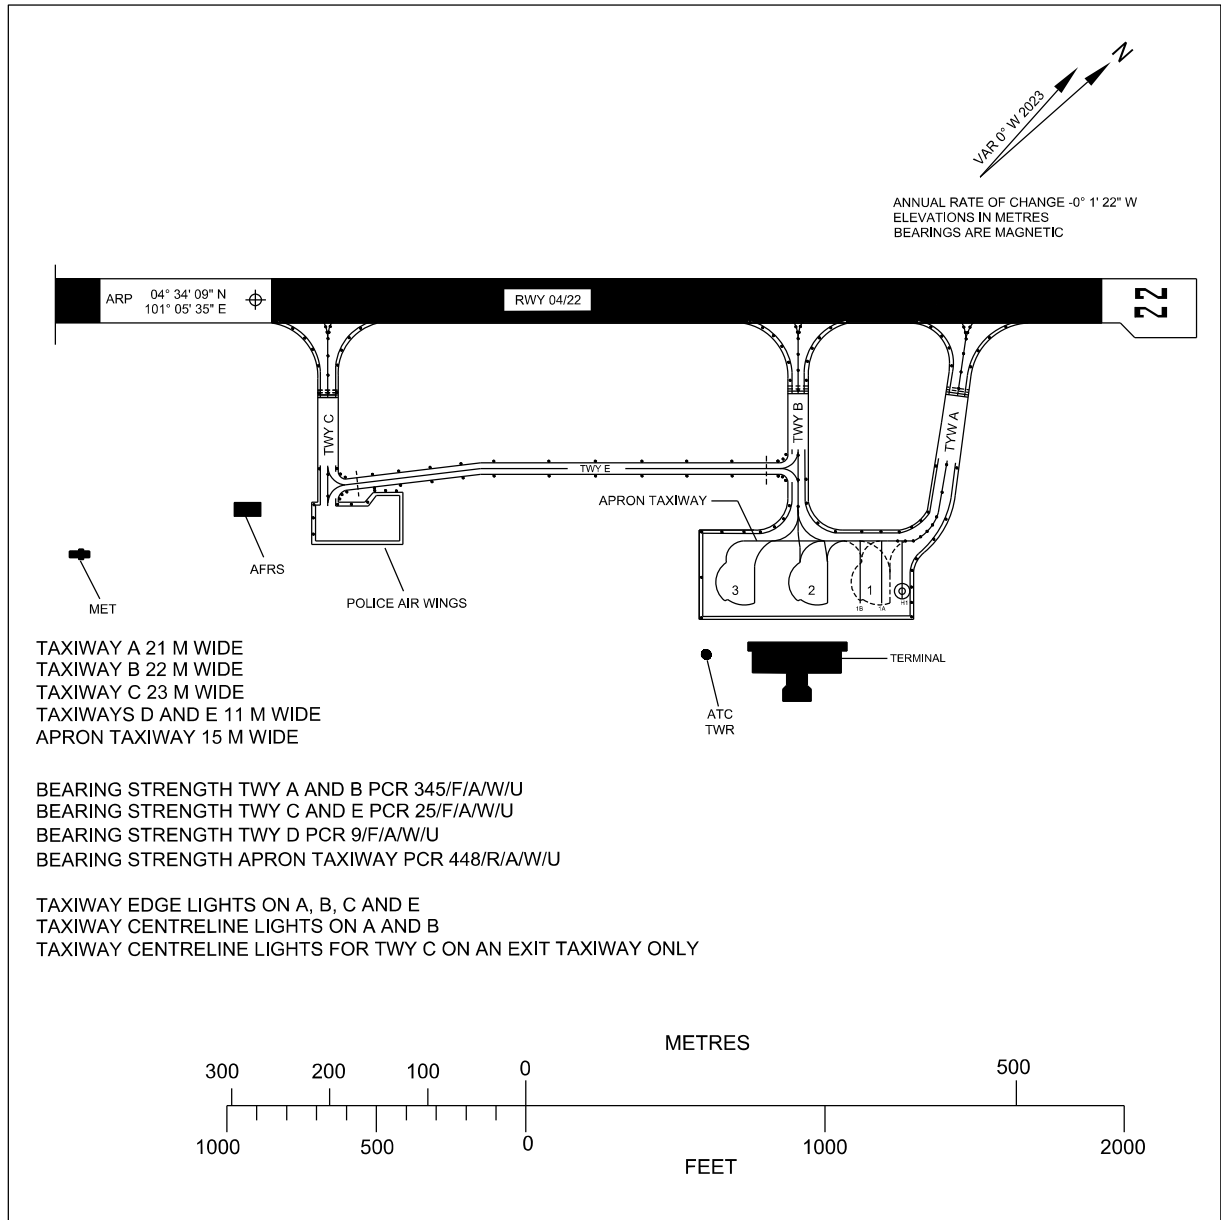

TAXIWAY A 21 M WIDE
TAXIWAY B 22 M WIDE
TAXIWAY C 23 M WIDE
TAXIWAYS D AND E 11 M WIDE
APRON TAXIWAY 15 M WIDE

BEARING STRENGTH TWY A AND B PCR 345/F/A/W/U
BEARING STRENGTH TWY C AND E PCR 25/F/A/W/U
BEARING STRENGTH TWY D PCR 9/F/A/W/U
BEARING STRENGTH APRON TAXIWAY PCR 448/R/A/W/U

TAXIWAY EDGE LIGHTS ON A, B, C AND E
TAXIWAY CENTRELINE LIGHTS ON A AND B
TAXIWAY CENTRELINE LIGHTS FOR TWY C ON AN EXIT TAXIWAY ONLY

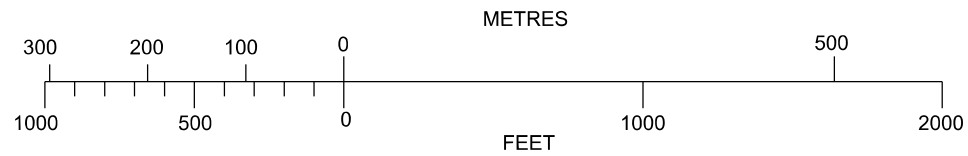

AIRCRAFT PARKING / DOCKING STAND POSITION

INS COORDINATES FOR AIRCRAFT STANDS	SURFACE & STRENGTH	AIRCRAFT TYPE
1 04° 34' 15.93" N 101° 05' 54.07" E	PCR 448/R/A/W/U	A320, B738
1A 04° 34' 16.38" N 101° 05' 54.64" E	PCR 10/R/A/W/U	PIPER PA34
1B 04° 34' 15.77" N 101° 05' 54.04" E	PCR 10/R/A/W/U	PIPER PA34
2 04° 34' 14.40" N 101° 05' 52.72" E	PCR 448/R/A/W/U	A320, B738
3 04° 34' 12.76" N 101° 05' 51.27" E	PCR 448/R/A/W/U	A320, B738
H1 04° 34' 17.06" N 101° 05' 54.98" E	3 TONNES (CONCRETE)	AS355

LEGEND	
AIRCRAFT STAND	3
TAXIWAY LIGHT	•
RUNWAY-HOLDING POSITION	≡≡≡
INTERMEDIATE HOLDING POSITION	----

CHANGES : PAVEMENT BEARING STRENGTH