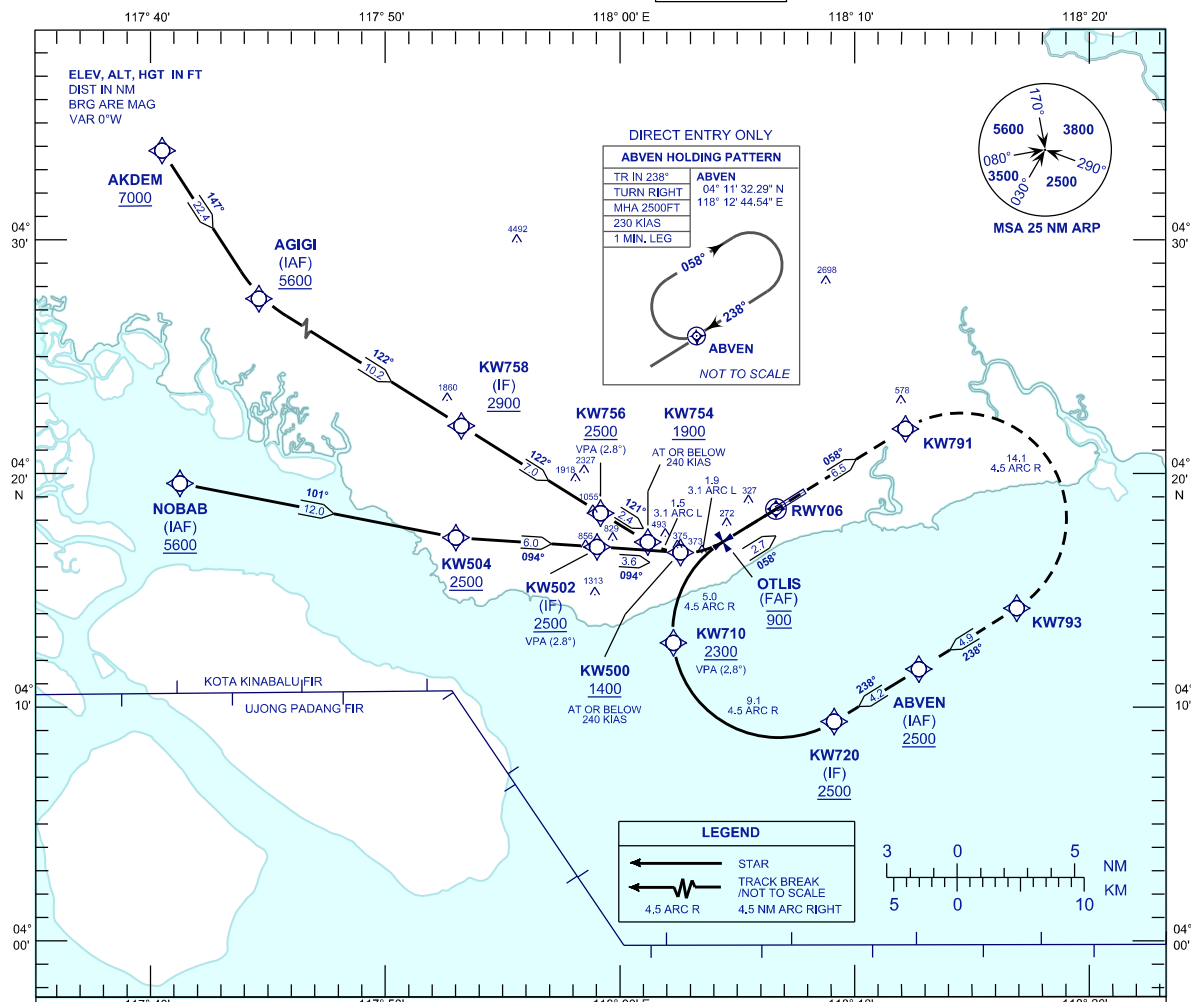


**INSTRUMENT
APPROACH
CHART - ICAO****AERODROME ELEV 56 FT**
HEIGHT RELATED TO
THR RWY 06 - ELEV 53 FTAPP 123.55
TWR 122.50
SMC 121.90
ATIS 126.25**TAWAU/TAWAU (WBKW)****RNP Z RWY 06 (AR)**VPA 2.8°
RDH 54FT**MISSED APPROACH**CLIMB TO 2500 FT VIA THE RNP MISSED APPROACH
TRACK TO ABVEN OR AS DIRECTED BY ATC.TRANSITION LEVEL FL130
TRANSITION ALT 11000 FTVSS PENETRATIONS 500 M
PRIOR TO THRTHR ELEV 53
NM TO THR 06

STRAIGHT-IN APPROACH	OCA (OCH)		GROUND SPEED - KT	70	90	100	120	140	160
CATEGORY OF AIRCRAFT	C	D	RATE OF DESCENT (2.8°) (FT/MIN)	347	446	495	594	693	792
RNP 0.3	555 (502)		DISTANCE TO THRESHOLD (NM)	2.7	2	1			
CIRCLING AND ALTERNATE N/A			ALTITUDE (FT)	900	670	370			

1. AUTHORIZATION REQUIRED**2. GNSS REQUIRED****3. RF REQUIRED**

- APPROACH NOT AUTHORIZED WHEN AIRPORT TEMPERATURE BELOW 18°C OR ABOVE 39°C.
- WBKW ALTIMETER SETTING REQUIRED.
- PAPI AND VERTICAL PATH ANGLE NOT COINCIDENT.
- RNP 0.3 REQUIRED FROM IAF'S TO FAF.

CHANGES : CHART IDENTIFICATION