


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 16 FT
HEIGHTS RELATED TO
THR RWY 04 - ELEV 16 FT

TWR	124.30 (PRY)
	118.50 (SRY)
SMC	121.95
EMERG	121.50

LIBMANG/LIBMANG(WBGJ)
RWY 04

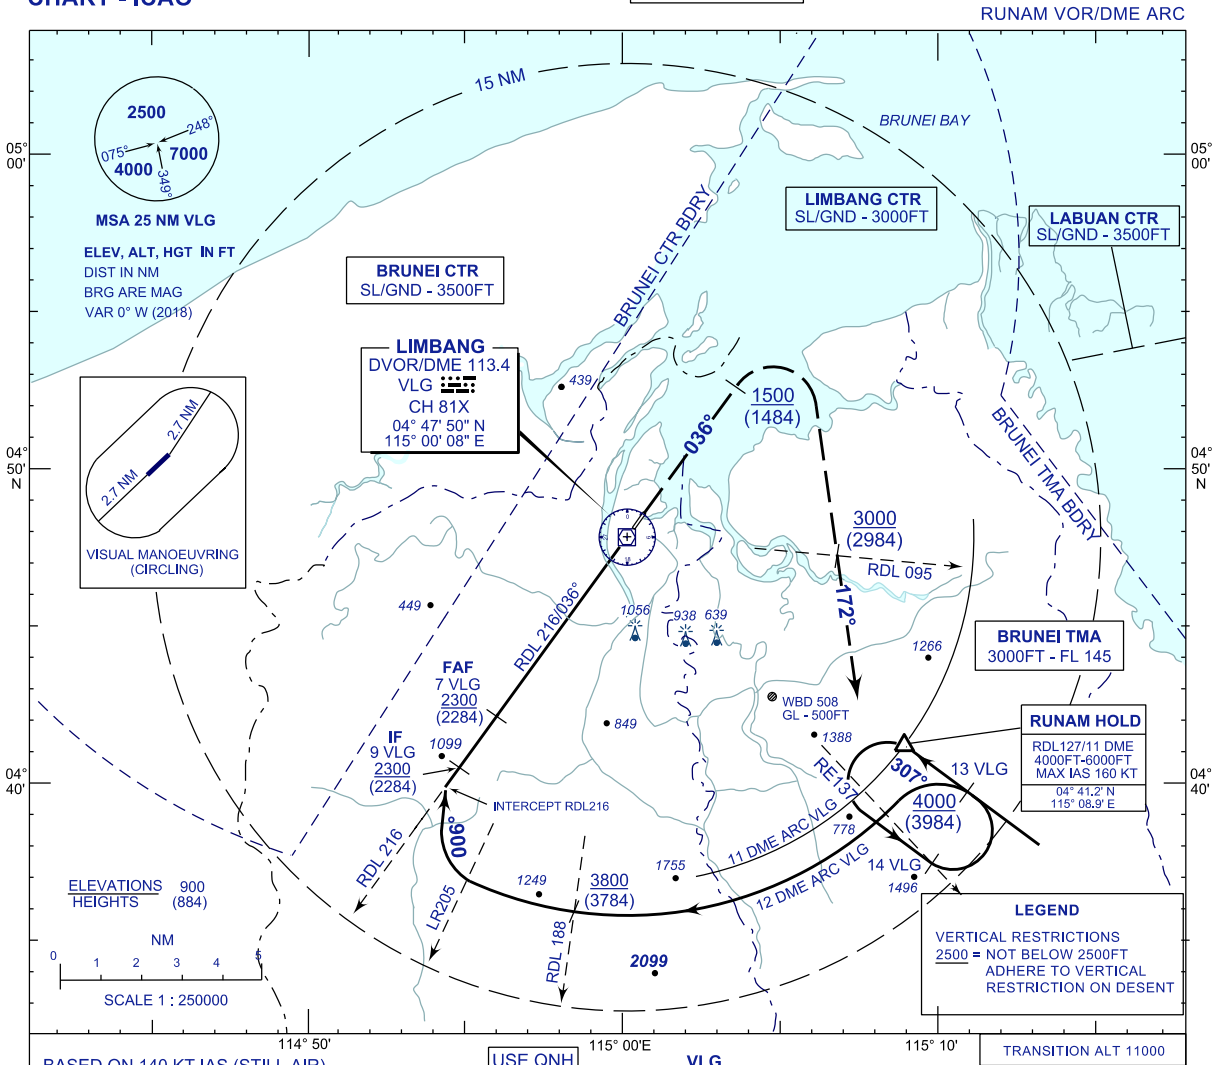


BASED ON 140 KT IAS (STILL AIR)

USE QNH

TRANSITION ALT 11000

RUNAM HOLD

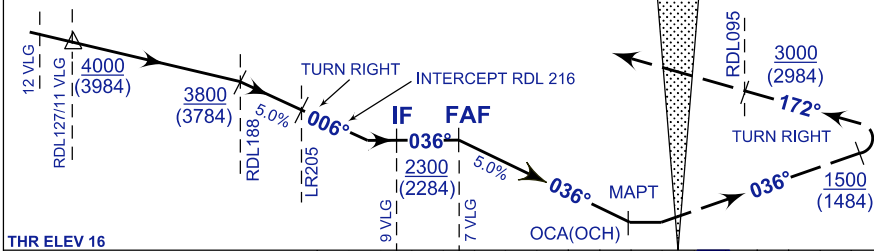

MISSED APPROACH

AT MAPT CLIMB ON 036° ON
PASSING 1500FT TURN RIGHT,
TRACK 172° CROSS RDL095
ABOVE 3000FT. INTERCEPT RDL137
TO ENTER RUNAM HOLDING
PATTERN, OR AS DIRECTED
BY ATC.

THR ELEV 16
THR RWY 04

OCA(OCH)						
CAT OF AIRCRAFT	A			B		
STRAIGHT-IN-APPROACH	550(534)/1.6 VLG			550(534)/1.6 VLG		
CIRCLING (VISUAL MANOE)FT	700(684)			700(684)		
VISIBILITY (MIN/KM)NM	1.9 (1.0)			2.8 (1.5)		
DISTANCE	7 DME	6 DME	5 DME	4 DME	3 DME	2 DME
ALTITUDE (HEIGHTS)	2300 (2284)	1966 (1950)	1646 (1630)	1326 (1310)	1006 (990)	686 (670)
TIME TO THR RWY 04 FROM FAF DISTANCE 7.4 NAUTICAL MILES						
GROUND SPEED	70	90	120	150	-	-
MIN : SEC	6:20	4:56	3:42	2:57	-	-
5.0% DESC. (FT/MIN)	355	456	608	760	-	-

CHANGES : ADD TWR SECONDARY FREQUENCY