


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 69 ft
HEIGHT RELATED TO
THR RWY 32R - ELEV 69 ft

APP	TWR	SMC	D-ATIS ID-WMKK
121.25 120.35 135.75	118.80	121.65	128.05


**SEPANG/KL INTERNATIONAL
AIRPORT (WMKK)**

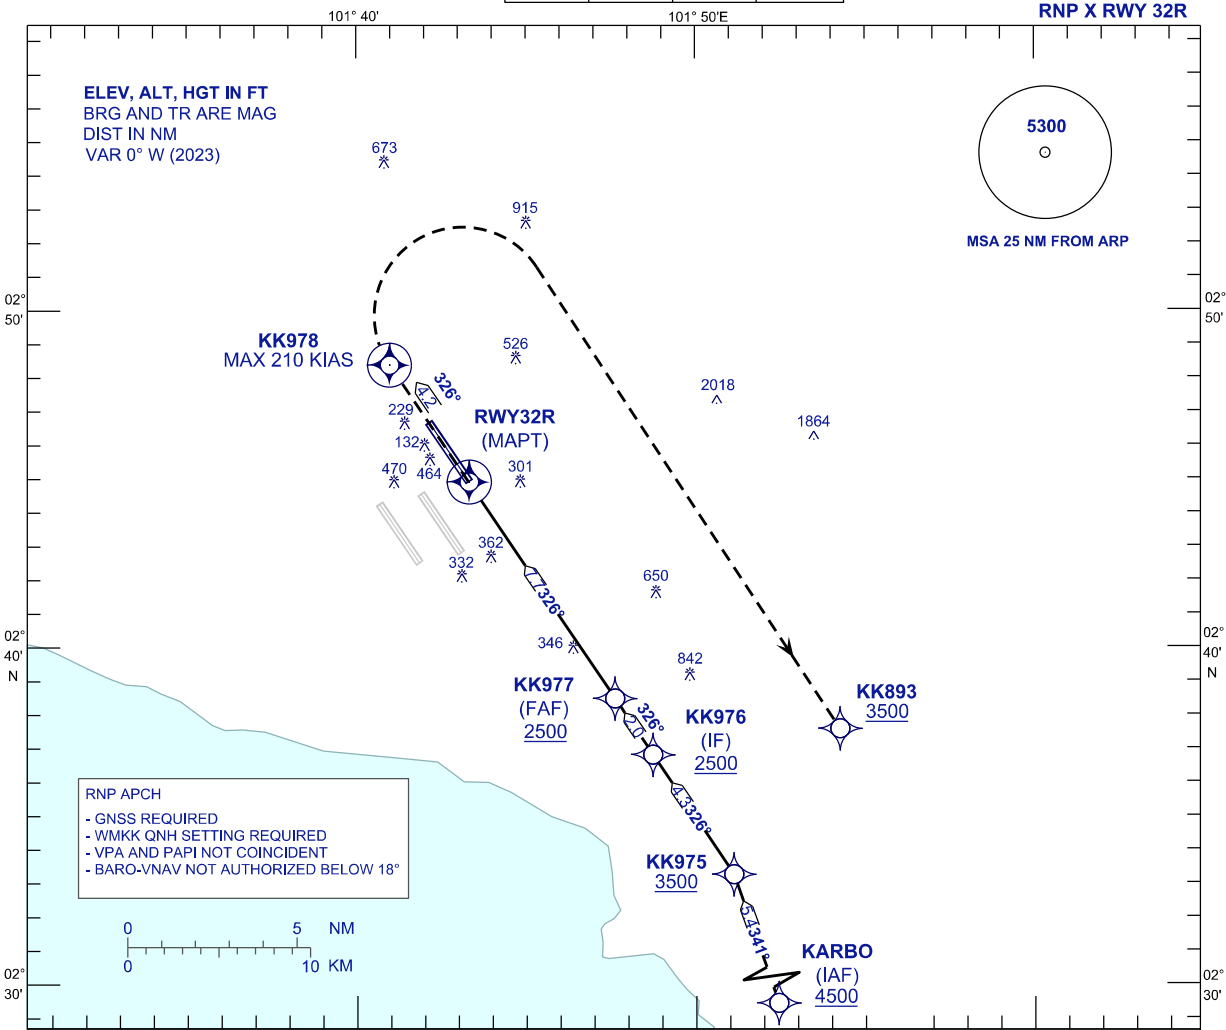

VPA 2.9°
TCH 56 ft

MISSED APPROACH
AT MAPT TR326 TO KK978 CLIMB TO 3500FT OR ABOVE. AT KK978 TURN RIGHT TO KK893 OR AS DIRECTED BY ATC.
CAUTION
SPEED MAX 210 KIAS UNTIL CROSSING KK978

TRANSITION LEVEL FL130
TRANSITION ALT 11 000

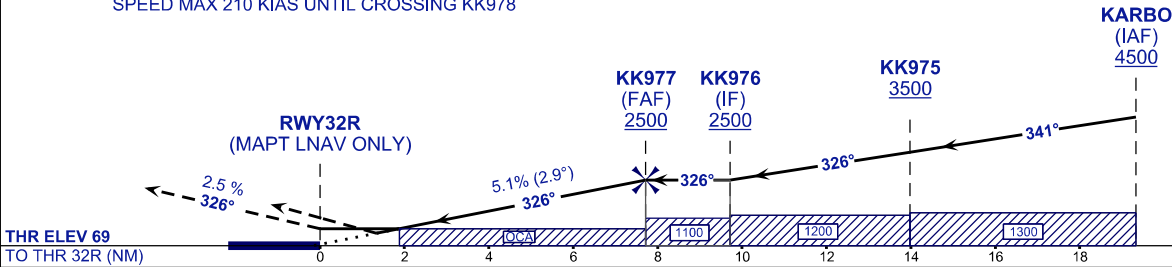

STRAIGHT-IN APPROACH		OCA (OCH)				GROUND SPEED (GS)		KNOTS	80	100	120	140	160	180		
CATEGORY OF AIRCRAFT		A	B	C	D	FAF - RWY32R (7.7 NM)		MIN:SEC	5:47	4:38	3:51	3:18	2:54	2:34		
LNAV / VNAV		601 (532)				RATE OF DESCENT (5.1% / 2.9°)		FT/MIN	410	510	620	720	820	920		
LNAV		700 (631)				DIST THR / RWY32R		NM	7.7	7.0	6.0	5.0	4.0	3.0	2.0	1.0
						ALTITUDE		FT	2500	2280	1972	1665	1357	1049	741	433

CHANGES : FREQUENCY ATIS TO D-ATIS ID-WMKK.